


# TDR2000/2 (CFL535F)

## Cable Fault Locator

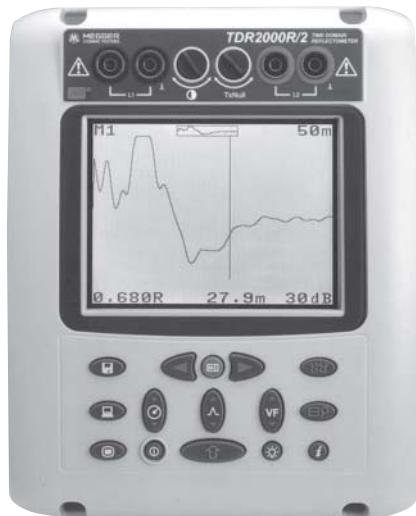

- 20 km range at VF = 0.90
- Monochrome or color options
- Primary cell or rechargeable options
- Large backlit LCD Display
- Dual cursor measurement
- Intermittent fault location
- Output pulse amplitude and width control
- "TX Null" technology
- No blocking filter required
- Trace Master PC software included

### DESCRIPTION

The TDR2000/2 is a state of the art, monochrome or color, dual channel Time Domain Reflectometer, capable of identifying and locating a wide range of faults on metallic cables.

The TDR2000/2 has a minimum resolution of 0.1m and a maximum range of 20 km at VF=0.9 and 16 Km (48,000 ft.) at 0.65 VF. The TDR2000/2 can perform single or dual channel measurements on a wide range of metallic cables. Active channels can be compared with each other or with previously stored traces from memory. Differential channel measurements are possible and cross talk between channels can also be identified.

All results are displayed on a high resolution, QVGA color display. Full contrast adjustment provides optimum display contrast in a variety of ambient light conditions.

### 3 Configurations Options

The TDR2000/2 comes in three configurations:

#### TDR2000/2 Monochrome primary cell

A fully featured high resolution TDR with backlit monochrome display and powered by 8 x AA (LR6) batteries.

#### TDR2000/2RM Monochrome rechargeable

As the TDR2000/2 but with a rechargeable NiMH battery pack and charger in place of the Dry cells.

### TDR2000/2R Color rechargeable

As the TDR2000/2RM but with a color high resolution display providing excellent trace separation in dual trace modes. The unit is also powered by a rechargeable NiMH and includes battery charger.

### Intermittent Mode

An 'intermittent mode' continually updates and shows any transient reflections. Any intermittent fault leaves a permanent record on the display, capturing elusive faults.

### Dual cursors

The TDR2000/2 can display either single or dual cursors. Single cursor mode displays the distance from the start of the cable to the cursor. In dual cursor mode the distance between faults can be measured.

### Fast Find key

One press of the find key automatically adjusts the range and gain and positions the cursor to the major event on the cable.

### Tx Null

Tx Null helps eliminate the 'dead zone' at the start of the displayed trace, normally obscured by the transmission pulse. By the adjusting the Tx Null the user can see these 'near end' faults more clearly.

### Output pulse control

Both the amplitude and width of the output pulse can be adjusted to provide the best possible reflection for accurate location of cable faults.

### Interactive Help Screen

A full graphical help screen is available with keyboard layout and individual key operation. At the press of a button.

### Trace Storage

15 internal trace memories provide for the storage and recall of test results. The traces can be recalled to the display for analysis or compared with an active display to aid in fault location.

Alternatively the stored results can be downloaded to a computer, over the RS232 port, using the TraceMaster software and RS232 lead provided.

### Trace Master PC Software

Trace Master provides download and upload facilities between the TDR and a computer. Traces can be individually selected, saved to a PC and annotated by the user. Historical information can be reviewed on the PC or recalled to the TDR for comparison with current measurements. Trace-Master is the ideal tool for cable documentation. Results can be printed from the computer for inclusion in documents.

### Power source

The TDR2000/2 can be supplied as a standard battery powered unit or in a rechargeable version, as the TDR2000/2RM or TDR2000/R. Fitted with a NiMH rechargeable battery pack the TDR2000/2R and TDR2000/RM are supplied with the charger as standard.

### BENEFITS

- 11 fault location modes
- For use on Telecom TNV-3 circuit, or 300V CAT III power circuits with fused leads. Phase to Earth or 415 V Phase to Phase
- External mains blocking filter not required
- Screen contrast control
- Multi language operation, uploadable using TraceMaster software
- 3 step pulse amplitude control
- Adjustable display contrast
- 15 trace internal memory
- Protected to IP54
- High impact ABS case
- Comes with test and carry case and test leads

### SPECIFICATION

Except where otherwise stated, this specification applies at an ambient temperature of 20° C.

#### Ranges

50 m, 100 m, 200 m, 400 m, 1 km, 2 km, 4 km, 8 km, 16 km (150 ft, 300 ft, 600 ft, 1200 ft, 3000 ft, 6000 ft, 12000 ft, 24000 ft, 48000 ft)

#### Resolution

0.1 m (4in.) up to 200 m (600 ft)  
0.2 m (8 in.) up to 400 m (1200 ft)  
0.1% of range above 400 m (1200 ft)

#### Measurement Accuracy

0.1% of Range

[Note – The measurement accuracy is for the indicated cursor position only and is conditional on the velocity being correct]

**Input Impedance:** 120 Ω.

**Input Protection:** 300 V CATIII working, 415 V CATIII Phase to Phase

#### Output Pulse Amplitude

Nominal 3 V, 5 V and 14 Vpk to pk into an open circuit

#### Pulse width user selectable:

<b>50m range:</b>	7 ns, 20 ns, 40 ns,
<b>150 ft</b>	60 ns, 80 ns
<b>100m range:</b>	7 ns, 40 ns, 60 ns,
<b>300 ft</b>	80 ns, 100 ns
<b>200 m ranges:</b>	7 ns, 40 ns, 80 ns,
<b>600 ft</b>	140 ns, 200 ns
<b>400 m range:</b>	40 ns, 80 ns, 160 ns,
<b>1200 ft</b>	200 ns, 400 ns
<b>1km range:</b>	80ns, 160ns, 260 ns,
<b>3000 ft</b>	500 ns, 1 ms
<b>2km range:</b>	160 ns, 260 ns,
<b>6000 ft</b>	500 ns, 1 ms, 2 ms
<b>4km range:</b>	240 ns, 500 ns,
<b>12000 ft</b>	1 ms, 2 ms, 4 ms
<b>8km range:</b>	500 ns, 1 ms, 2 ms,
<b>24000 ft</b>	4 ms, 8ms
<b>16km range:</b>	1 ms, 2 ms, 4 ms,
<b>48000 ft</b>	8 ms, 16 ms

(Default pulse width for each range underlined)

**Gain:** 0 to 90 dB in steps of 6 dB

#### Velocity Factor

Variable from 0.300 to 0.999 in steps of 0.001

**TX Null:** 0 Ω to 120 Ω

#### Screen Update Rate

Once per second or three times per second, (user selectable).

#### Power Down

Automatic after 5, 10 or 15 minutes with no keys pressed, (user selectable).

#### Backlight

Stays on for 1, 2 or 5 minutes when activated, (user selectable).

#### Communications Port

RS-232C compatible 1 start bit, 8 data bits, 1 stop bit and no parity, 19200 baud standard

**Internal Memory:** Storage capacity of 15 waveforms and data

**Batteries**

**TDR2000/2**

Eight LR6 (AA) type batteries, manganese-alkali or nickel-cadmium or nickel-metal-hydride cells.  
TDR2000/2RM NiMH cell  
TDR2000/2R NiMH cell

**Battery Charger**

**Supply voltage**

**European Version:** 230 Vac ±10% 50 Hz  
**North American Version:** 115 V a.c. ±10% 60 Hz

**Safety**

This instrument complies with IEC61010-1 for connection to live systems up to 300V CAT III with fused leads.

**EMC**

The instrument will comply with EN 61326-1, classified as 'class B'. If connected to a live domestic power supply, the operation of this instrument could cause interference with other equipment connected to the same supply. To reduce this interference, select the lowest voltage and narrowest width pulse as consistent with accurate measurement. During immunity tests there may be self-recovering loss of function (i.e. Performance criterion B).

**Mechanical**

The instrument is designed for use indoors or outdoors and is rated to IP54.

**Case Dimensions**

250 L x 200 W x 110 D mm  
(9.8 H x 7.9 W x 4.3 D in.)

**Instrument Weight**

1.5 kg (3.3lbs)

**Case Material**

ABS

**Connectors**

Two pairs of 4mm safety terminals.  
9 way D-type connector for serial communication.

**Display**

320 x 240 pixel eight color backlight LCD.

**Environmental**

**TDR2000/2**

**Operational Temperature**

-15° C to +50° C (5° F to 122° F)

**Storage Temperature**

-20° C to +70° C (-4° F to 158° F)

**TDR2000/2R**

**Operational Temperature**

-15° C to +45° C (5° F to 113° F)

**Storage Temperature**

-20° C to +45° C (-4° F to 113° F)

Charging should not take place when the ambient temperature is less than 0° C (+32° F)

**Humidity**

<95% at +40° C non-condensing

**ORDERING INFORMATION**

<b>Item (Qty)</b>	<b>Cat. No.</b>
TDR2000/2 Monochrome Dry Cell	TDR2000/2 [6411-011]
CFL535F Monochrome Standard*	655535F
TDR2000/2R Monochrome Rechargeable	TDR2000/2R [6411-013]
CFL535FM Monochrome Rechargeable*	655535FM
TDR2000/2RM Color Rechargeable	TDR2000/2RM [6411-029]
CFL535FR Color Rechargeable*	655535FR
<i>*CFL U.S. Market only</i>	
<b>Included Accessories</b>	
Test and carry pouch	6420-114
Serial data lead	25955-025
2 x miniature clip test lead set	6231-654
Carry strap for pouch	6220-611
TraceMaster software	6111-458
User guide	6172-662
<b>Included Accessories</b>	
TDR2000/2R only	
Battery charger UK version	6121-538
Battery charger European	6121-539
<b>Optional Accessories</b>	
Fused test lead set:	6111-218

---

**UK**  
Archcliffe Road, Dover  
CT17 9EN England  
T (0) 1 304 502101  
F (0) 1 304 207342

**UNITED STATES**  
4271 Bronze Way  
Dallas, TX 75237-1018 USA  
T 1 800 723 2861  
T 1 214 333 3201  
F 1 214 331 7399

**OTHER TECHNICAL SALES OFFICES**  
Norristown USA, Toronto CANADA,  
Mumbai INDIA,  
Le Raincy FRANCE, Cherrybrook  
AUSTRALIA, Guadalajara SPAIN  
and The Kingdom of BAHRAIN.

**ISO STATEMENT**  
Registered to ISO 9001:1994 Reg no. Q 09250  
Registered to ISO 14001 Reg no. EMS 61597  
**TDR2000\_DS\_en\_V01**  
**www.megger.com**  
Megger is a registered trademark