



200 SERIES

- Switch adjustment ranges from 3 psig to 30 psig through 450 psig to 4,600 psig
- Zinc-nickel plated Steel with NBR diaphragm (< 225 psig); Steel piston with NBR seal (> 225 psig) wetted parts
- SPDT snap-action micro switch with solid Silver contacts
- RoHS compliant

APPLICATIONS

- Hydraulics & pneumatics
- Pumps & compressors
- Tank monitoring
- Leak detection
- Water management

SPECIFICATIONS

Switching parameters	
Number	1
Function	SPDT snap-action micro switch with solid silver contacts, gold-plated contacts available on request
Contact rating	Up to 28 Vdc 2A Up to 50 Vac 4A
Non-repeatability	±2% of full scale adjustment range
Contact material	Solid Silver, self-cleaning, optional gold-plated
Frequency	Max. 100 cycles/min
Media	Diaphragm type, compressed air or not corrosive liquids Piston type, self lubricating fluids such as hydraulic oil or grease
Pressure ranges	
3 psig to 30 psig through 450 psig to 4,600 psig Diaphragm type: 870 psi max.; piston type: 5,000 psi max.	
Switch adjustment	
Switch point	Full scale
Hysteresis	Diaphragm type, ≤ 10% of full scale adjustment range, minimum 100 psig, Piston type, maximum 15% of full scale adjustment range
Service life	>1,000,000 load cycles
Temperature ranges	
Media -4 °F to 176 °F (-20 °C to 80 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -4 °F to 176 °F (-20 °C to 80 °C)	
Proof pressure	870 psig or 5,000 psig depending on adjustment range
Measuring element	NBR diaphragm < 225 psig; Steel piston with NBR seal > 225 psig 1/4" NPT zinc-plated Steel
Housing material	Zinc-nickel plated Steel
Environmental rating	Spade terminals IP00
	Cable connection IP67
Weight	Approximately 0.2 lb.





ORDERING INFORMATION					
SERIES	200				
SWITCH FUNCTION	1 Single changeover contact (SPDT)				
PROCESS CONNECTION	2 1/4" NPT male				
SWITCH ADJUSTMENT RANGES (Max. working pressure)	3/30	3 psig to 30 psig (870 psig)	150/1700	150 psig to 1,700 psig (5,000 psig)	
	7/115	7 psig to 115 psig (870 psig)	150/2300	150 psig to 2,300 psig (5,000 psig)	
	15/225	15 psig to 225 psig (870 psig)	300/2900	300 psig to 2,900 psig (5,000 psig)	
	150/425	150 psig to 425 psig (5,000 psig)	300/3600	300 psig to 3,600 psig (5,000 psig)	
	150/1150	150 psig to 1,150 psig (5,000 psig)	450/4600	450 psig to 4,600 psig (5,000 psig)	
ELECTRICAL CONNECTIONS	4	6.3 mm Spade terminals	36	18" Integral cable	

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series200 Series
 Switch function.....Single changeover contact
 Process connection1/4" NPT Male
 Adjustable range150 psig to 425 psig
 Electrical connection6.3 mm spade terminals

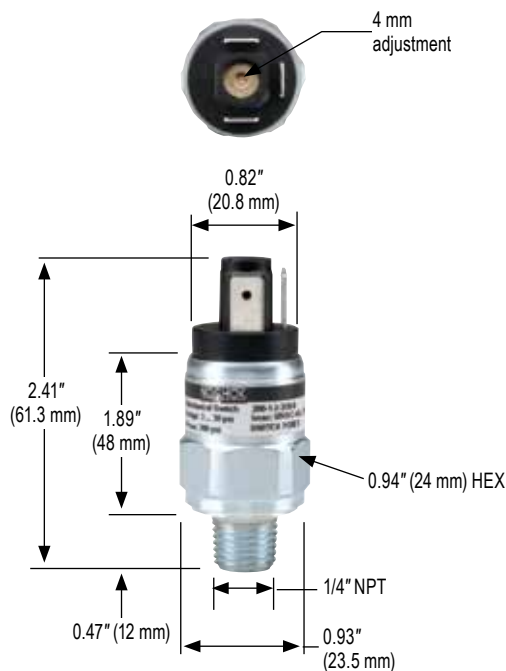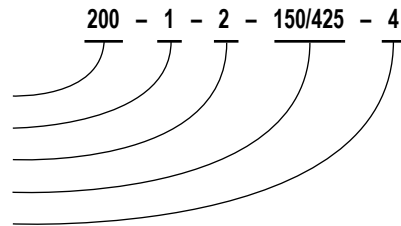

Switching Output Schematic

