


Made in the
United States of America

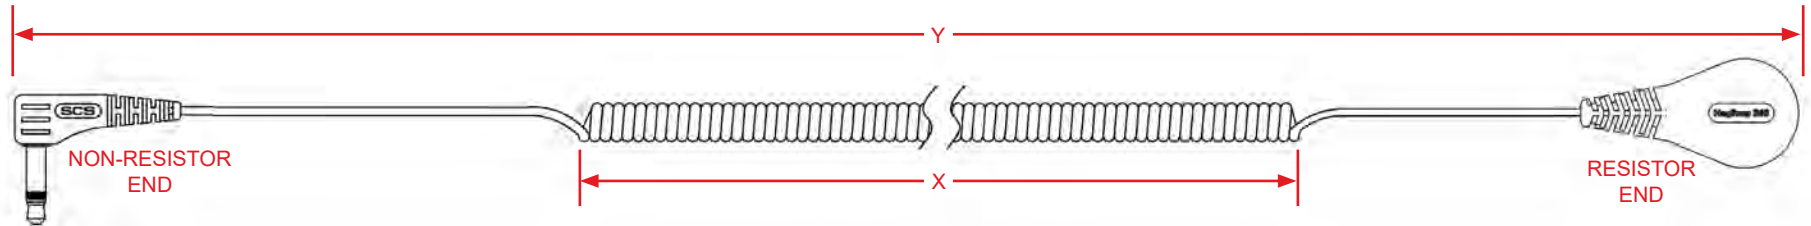

- A. Underwriters Laboratory Listing 90P1C.
 - B. Compatible with [SCS Dual-Wire Workstation Monitors](#) and other brands that accept a 3.5 mm phono plug.
 - C. SCS logo molded in compliance with ANSI/ESD S1.1.
 - D. Thermoplastic elastomer strain relief molded on.
 - E. Relaxed retraction coil cord reduces tug on wearer's wrist. Black PVC insulation. Break load average 30 pounds.
 - F. Dual T-3067 tinsel conductor. Consists of stranded polyester wrapped in copper. Equivalent to 29 gauge (cir mil and/or ohms).
 - G. 1 megohm ($\pm 5\%$) current limiting resistors on both conductors.
 - H. Unique dual contact design is to be paired with an [SCS MagSnap 360™ Wristband](#) (not included) for a superior electrical connection. The magnetic connection made with the wristband maintains a 1-5 pound perpendicular breakaway force to prevent accidental disconnects. Spring loaded center contact rated to 1 million cycles.
 - I. Date coded with date of manufacture in compliance with ANSI/ESD S1.1.
- Meets required limits of ANSI/ESD S20.20 and requirements of ANSI/ESD S1.1.

Item	Mono Plug Tip Diameter	Retracted Length		Extended Length	
		X	Y	Nominal	Max
2234	0.116"	12"	20"	6'	8.5'
2235	0.116"	24"	32"	12'	17'
2236	0.116"	30"	38"	20'	22'

Unless otherwise noted, tolerance $\pm 10\%$

Specifications and procedures subject to change without notice.
U.S. Patent Pending

SCS