




IN-SURE® PUSH-IN WIRE CONNECTORS

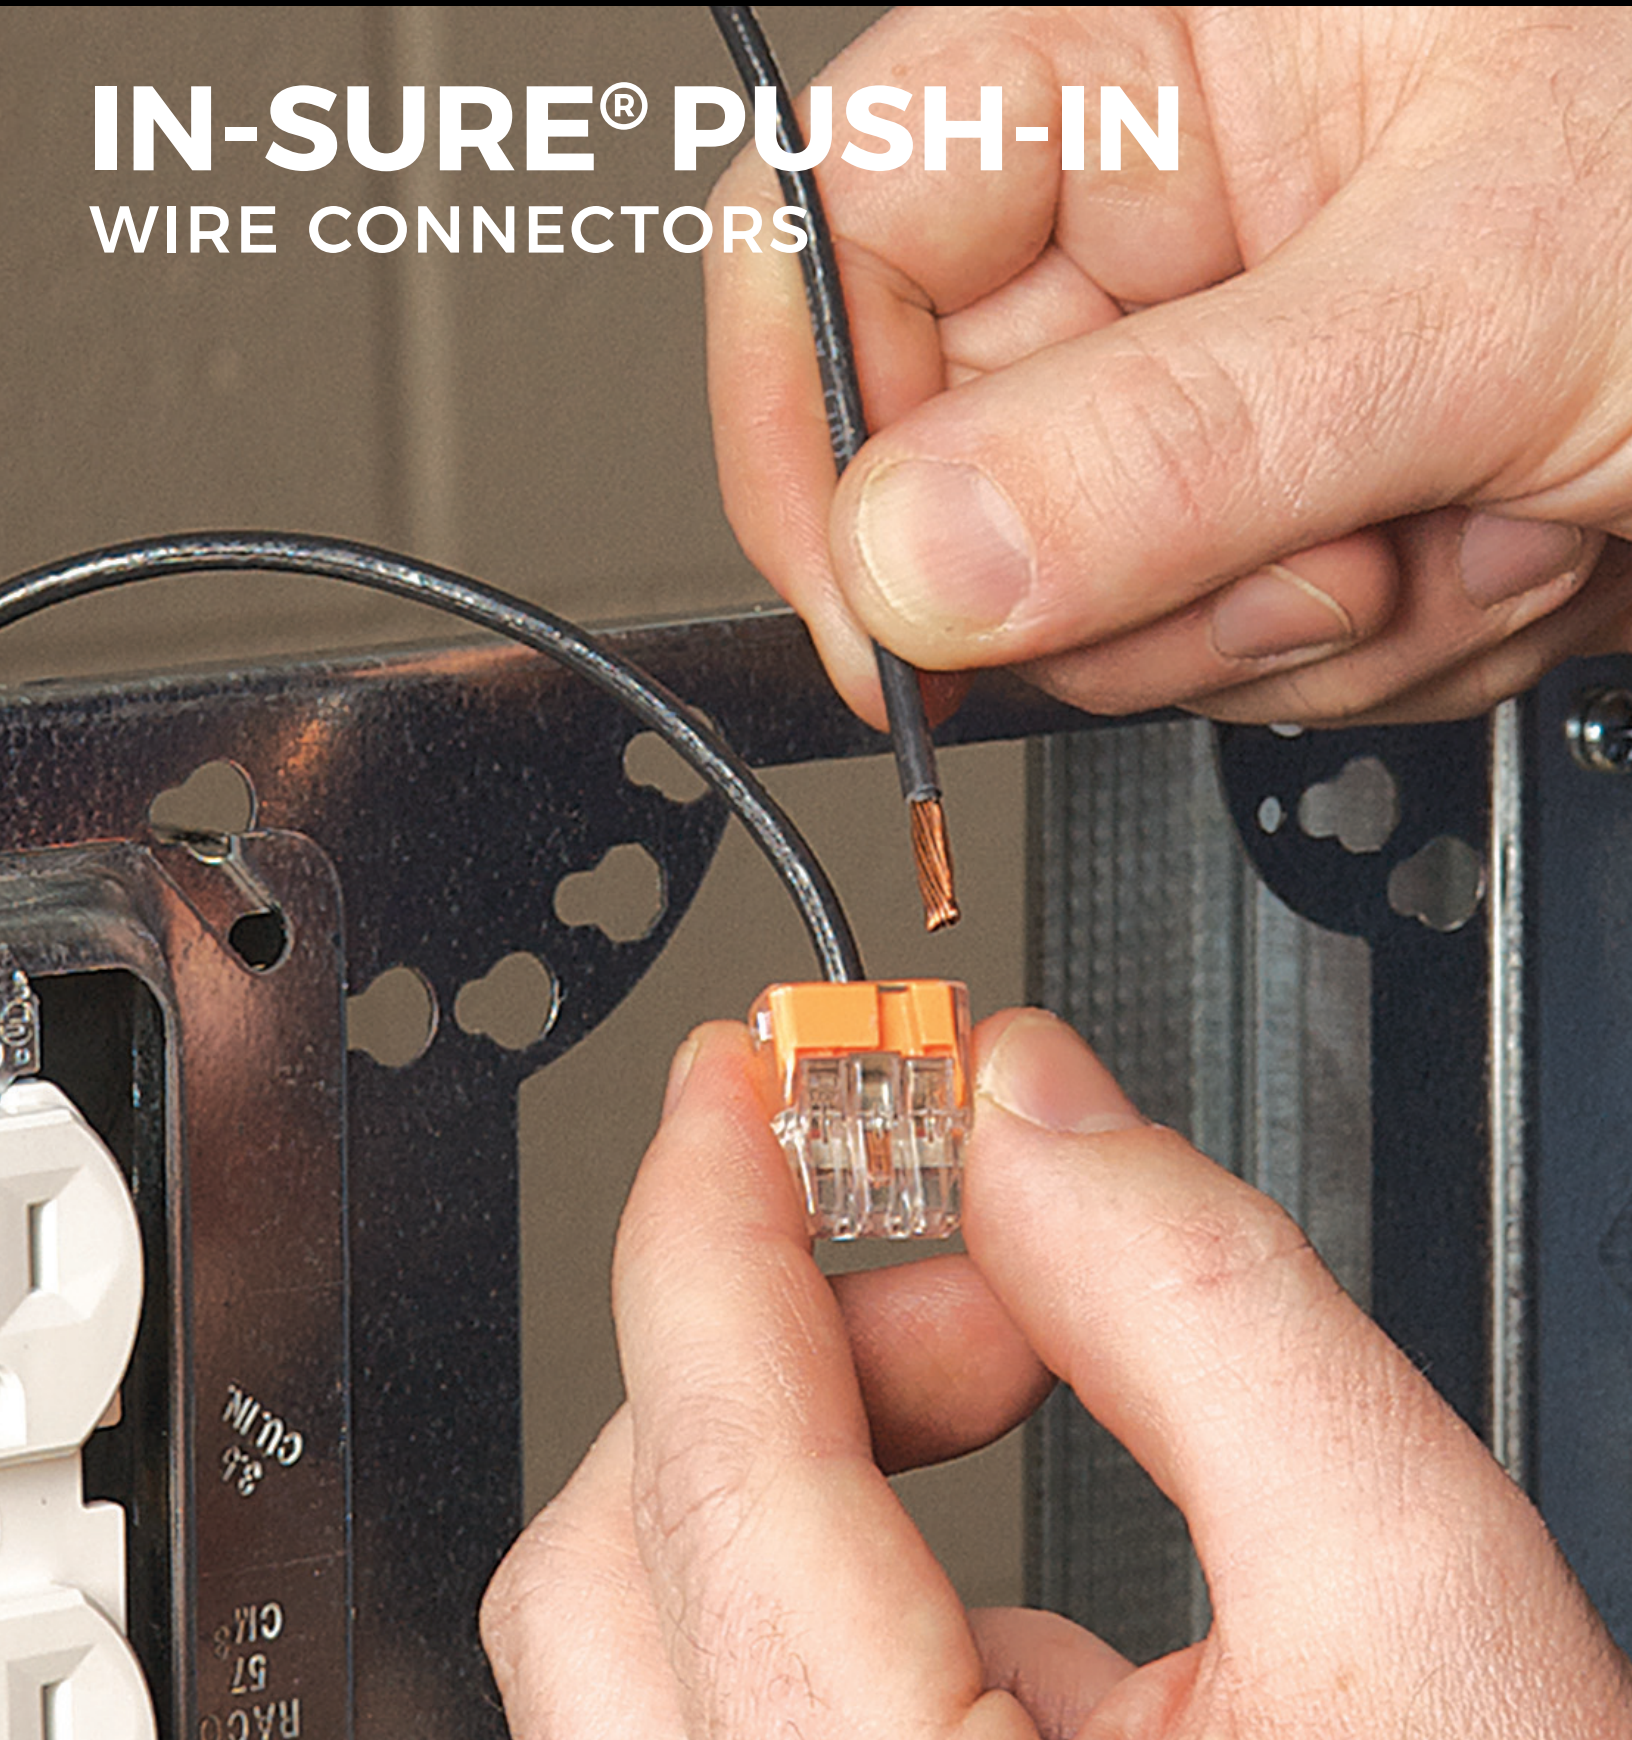

Find Quality Products Online at:

www.GlobalTestSupply.com


sales@GlobalTestSupply.com

IN-SURE® PUSH-IN WIRE CONNECTORS

Save Time And Increase Productivity

If it's IDEAL®, it's a quality connector — and the In-Sure® Push-In Wire Connector is no exception. Color-coded, the clear polycarbonate housing allows for visual verification of every connection. The ergonomic design of the In-Sure® is easier to grip which means more comfortable push-in connections. Perfect for lighting installations, pre-fabricated wiring systems, and other branch circuit wiring applications. Simply push the wire in — the low insertion force makes it easy. UL Listed, CSA Certified and rated to 600V and 105°C.

In-Sure® Push-In Wire Connectors save time and improves productivity while perfecting connections.

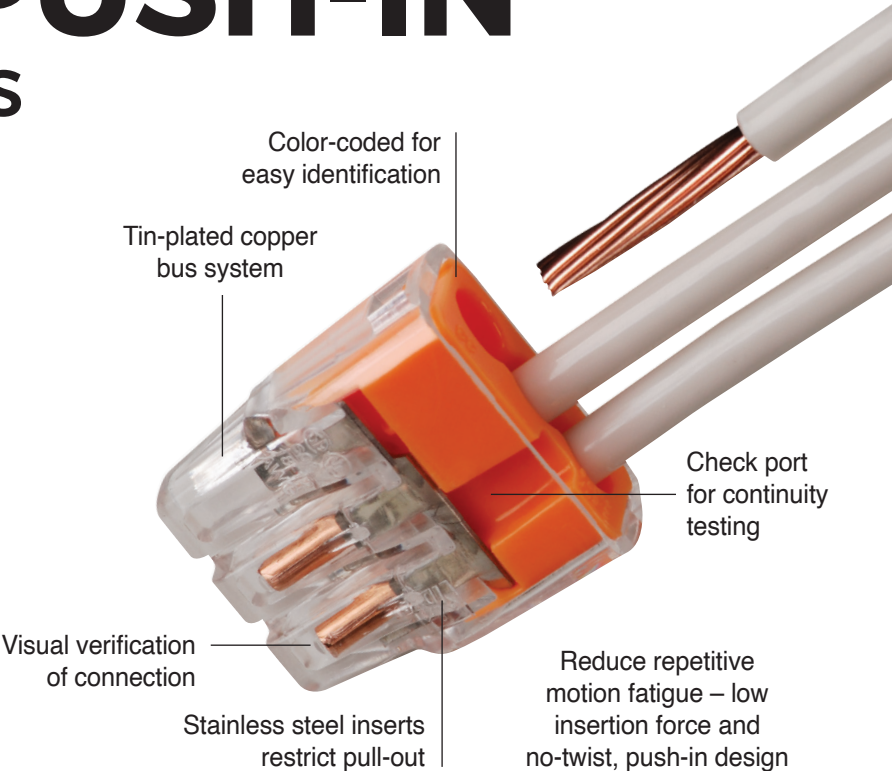

MODEL	COLOR	PORTS	AMP RATING	WIRE RANGE	QUANTITY	PART NO.
32 	Red	2	20 Amp	Solid Copper: 12 – 20 AWG Stranded Copper: 12 – 16 AWG (≤ 19 Stranded) 18 AWG (7 Stranded) Stranded Copper (Tin Bonded): 14 – 18 AWG (≤ 19 Stranded)	Box of 100	30-1032
					Jar of 300	30-1032J
					Box of 5,000	30-1632
33 	Orange	3	20 Amp	DO NOT use with 16 AWG (26 Strands)	Box of 100	30-1033
					Jar of 250	30-1033J
					Box of 5,000	30-1633
34 	Yellow	4	20 Amp		Box of 100	30-1034
					Jar of 200	30-1034J
					Box of 5,000	30-1634
87 	Gray	5	20 Amp	Solid Copper: 12 – 20 AWG Stranded Copper: 12 – 16 AWG (≤ 19 Stranded) 18 AWG (≤ 7 Stranded) Stranded Copper (Tin Bonded): 14 – 18 AWG (≤ 19 Stranded)	Jar of 200	30-1087J
88 	Blue	6	20 Amp		Box of 3,000	30-1687
					Jar of 200	30-1088J
90 	Black	8	20 Amp	DO NOT use with 16 AWG (26 Strands)	Box of 2,500	30-1688
					Jar of 150	30-1090J
39 	Blue	3	30 Amp	Solid Copper: 10 – 14 AWG (6.0-2.5mm2 Rigid) Solid Copper-Clad Aluminum*: 10 – 12 AWG Stranded Copper: 10 – 12 AWG (≤ 19 Stranded) (Tin Bonded): 10 – 14 AWG (≤ 19 Stranded)	Box of 2,000	30-1690
					Box of 50	30-1039
					Jar of 150	30-1039J

Cu to Cu ONLY. Do not use on aluminum. Temperature rating: 105°C (221°F) maximum; 600V maximum building wire, 1000V maximum signs or lighting fixtures
Model 39 only: *Listed for use with CU or CC. Do not use on Aluminum.
UL Listed for US and Canada. EU and UKCA certified. RoHS compliant.

