
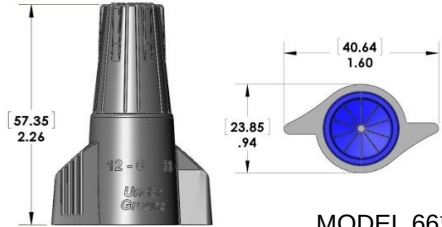


|                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------|
|                                                                                                                    | MODELS 60®, 64® & 66™                                                                                                                                                                                                                                                                                                                                               | UNDERGROUND WIRE CONNECTORS                                                                                                      |                                                       |                                                            |
| FEATURES/BENEFITS:                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
|                                                                                                                   | <ul style="list-style-type: none"><li>- PRE-FILLED TWIST-ON WIRE CONNECTORS PROVIDE ONE-STEP PROCESS</li><li>- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE &amp; CORROSION IN WET LOCATION APPLICATIONS</li><li>- LISTED TO UL 486G SEALED TWIST-ON WIRE CONNECTOR</li><li>- FOR USE IN DAMP/WET LOCATIONS OR DIRECT BURIAL/BELOW-GRADE APPLICATIONS</li></ul> |                                                                                                                                  |                                                       |                                                            |
| ELECTRICAL:                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
| VOLTAGE: MODEL 60®                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                     | 600 V MAX*                                                                                                                       |                                                       |                                                            |
| MODEL 64®                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                     | 600 V MAX*                                                                                                                       |                                                       |                                                            |
| MODEL 66®                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                     | 600 V MAX*                                                                                                                       |                                                       |                                                            |
| *SIGNS/FIXTURES 1000V                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
| PHYSICAL:                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                     | STANDARDS & SPECIFICATIONS:                                                                                                      |                                                       |                                                            |
| HOUSING: THERMOPLASTIC POLYESTER                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                     | UL 486C                                                                                                                          |                                                       |                                                            |
| INSERT: STEEL                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                     | UL 486G SEALED TWIST-ON WIRE CONNECTOR                                                                                           |                                                       |                                                            |
| PLATING: ZINC                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                     | UL 94V-2 FLAME RATING                                                                                                            |                                                       |                                                            |
| TEMPERATURE: 105 C (221 F)                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                     | CSA- C22.2 NO. 188                                                                                                               |                                                       |                                                            |
| SEALANT 100% SILICONE                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                     | CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL                                                                                           |                                                       |                                                            |
|                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                     | RoHS COMPLIANT                                                                                                                   |                                                       |                                                            |
| WIRE RANGE: <ul style="list-style-type: none"><li>- Solid and/or stranded wire combinations unless stated otherwise</li><li>- Consult factory for numerous other combinations not listed</li></ul> |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
| MODEL 60®                                                                                                                                                                                          | MODEL 64®                                                                                                                                                                                                                                                                                                                                                           | MODEL 66™                                                                                                                        |                                                       |                                                            |
| STRIP LENGTH: 1/2" (12,7mm)                                                                                                                                                                        | STRIP LENGTH: 5/8" (15,9mm)                                                                                                                                                                                                                                                                                                                                         | STRIP LENGTH: 1" (25,4mm)                                                                                                        |                                                       |                                                            |
| 1 to 2 #10<br>1 to 3 #12<br>1 to 4 #14<br>2 #16<br>2 #18<br>1 #10 w/ 2 #12<br>1 #20 w/ 1 #18                                                                                                       | 1 to 3 #10<br>1 to 3 #12<br>2 to 5 #14<br>2 to 4 #16<br>2 to 4 #18 solid<br>3 or 4 #20 solid<br>3 or 4 #22 solid                                                                                                                                                                                                                                                    | 1 to 2 #6<br>2 to 3 #8<br>2 to 5 #10<br>3 to 6 #12<br>1 #6 w/ 1 to 2 #8<br>2 #6 w/ 1 #10 or 1 #12 or 1 #14<br>2 #8 w/ 1 or 2 #10 |                                                       |                                                            |
| DIMENSIONS:                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
| Length = 1.68 in (42,7 mm)<br>Diameter = 0.65 in (16,5 mm)<br>Wingspan = 0.85 in (21,7 mm)<br><br>MODEL 60® IMAGE NOT AVAILABLE                                                                    | <br>MODEL 64®                                                                                                                                                                                                                                                                    | <br>MODEL 66™                                |                                                       |                                                            |
| ORDERING INFO:                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |
| CATALOG #<br>30-1260<br>30-1264<br>30-1066                                                                                                                                                         | MODEL<br>60®<br>64®<br>66™                                                                                                                                                                                                                                                                                                                                          | COLOR<br>Gray/Gray<br>Gray/Dk. Blue<br>Gray/Dk. Blue                                                                             | PACKAGE TYPE:<br>Box of 100<br>Box of 50<br>Box of 50 | WEIGHT LBS (KG):<br>14.4 (6.5)<br>34.1 (15.5)<br>5.5 (2,5) |
| FACTORY CONTACT:                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                     | SALES CONTACT:                                                                                                                   |                                                       |                                                            |
|                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                  |                                                       |                                                            |

Revision: January 7, 2010