TWISTER® PRO FAMILY

WIRE CONNECTORS




TWISTER® PRO FAMILY

WIRE CONNECTORS

The Twister Pro® and ProFLEX™ family combines the most comfortable wire connector from IDEAL Electrical with the widest wire range of any multi-colored connectors in the industry. These connectors are designed with a live-action spring and high-leverage wings that provide excellent grip and torque. The ProFLEX™ line up is also engineered with a flexible skirt for added protection, providing performance professional electricians can trust.

Features:

- · Widest Wire Range of any multi-colored wire connectors in the industry
- Model's 343, 345, 347 and 348 flexible skirt provides improved protection and adapts to fit electrical boxes with limited space
- Swept wing design with SureGrip[™] overmold offers greater comfort, leverage, and torque for faster connections
- Expanding square-wire spring and polypropylene shell deliver a secure connection every time

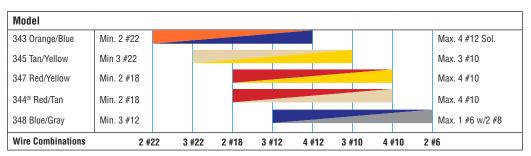



Ordering Information

| Description | | Model | Color | Wire Combination Range | Quantity | Part No. |
|---|---|------------------|-------------|---|------------------|-----------|
| Twister® ProFLEX™ Mini | Ø | 343 | Orange/Blue | 600V* 22 to 12 AWG Min. 2 #22 – Max. 4 #12 Sol. WIDEST RANGE in the industry of any orange/blue connector | Box of 100 | 30-343 |
| | | | | | Jar of 500 | 30-643J |
| | | | | | Barrel of 35,000 | 30-843 |
| Twister® ProFLEX TM Plus | | 345 | Tan/Yellow | 600V* 22 to 8 AWG Min. 3 #22 – Max. 3 #10 WIDEST RANGE in the industry of any tan/yellow connector | Box of 100 | 30-345 |
| | | | | | Jar of 500 | 30-1345J |
| | | | | | Barrel of 25,000 | 30-845 |
| Twister® ProFLEX™ | | 347 | Red/Yellow | 1000V 22 to 8 AWG Min. 2 #18 - Max. 4 #10 WIDEST RANGE in the industry | Box of 50 | 30-1047 |
| | | | | | Bag of 250 | 30-347 |
| | | | | | Jar of 400 | 30-1347JR |
| | | | | | Barrel of 15,000 | 30-747 |
| Twister® Pro | | 344 [®] | Red/Tan | 600V* 22 to 8 AWG Min. 2 #18 – Max.4 #10 WIDEST RANGE in the industry | Box of 50 | 30-144 |
| | | | | | Jar of 250 | 30-244J |
| | | | | | Jar of 500 | 30-644J |
| | | | | | Barrel of 20,000 | 30-944 |
| Twister® ProFLEX™ Max | | 348 | Blue/Gray | 1000V 14 to 6 AWG Min. 3 #12 – Max. 1 #6 w/2 #8 345 UL Listed Wire Combinations | Box of 25 | 30-348 |
| | | | | | Jar of 150 | 30-1348J |

^{*1,000}V maximum in fixtures and signs.



