

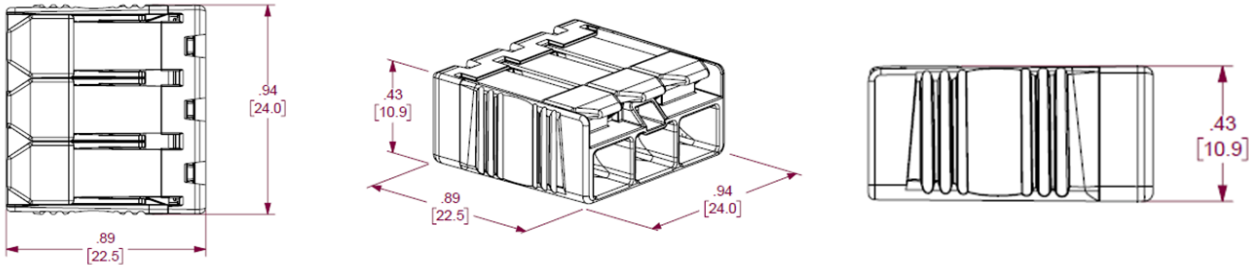


| | | | | | |
|--|-------|-------------------------------------|--|---|--|
|  | | MODEL L32, L33, & L35 | |  | |
| FEATURES/BENEFITS: | | | | | |
| <ul style="list-style-type: none">• 10 AWG Solid/Stranded capability for high current applications• 2-, 3-, & 5-Port options to address just about any application• Low lever force may reduce risk of repetitive trauma injury• Wide wire range for easy installation at pre-fabrication and in field• Clear housing enables easy verification of connection• Ground rating eliminates need for special "ground" connector | | | | | |
| ELECTRICAL: | | | MECHANICAL: | | |
| VOLTAGE: | | | Compact size to fit into confined junction boxes | | |
| General: 600V Max. | | | Wide levers ease actuation | | |
| Signs/Luminaires: 1000V Max. | | | Profiled housing for improved grip | | |
| AMPERAGE: 30A (41A IEC 60998) | | | Reusable solid and stranded wire | | |
| PHYSICAL: | | | STANDARDS & SPECIFICATIONS: | | |
| HOUSING: PC (Transparent) | | | UL/cUL 486C, 467 Grounding - E5238 | | |
| LEVERS: Nylon | | | CE Certified | | |
| Contacts: Copper | | | IEC/EN 60998 | | |
| Plating: Tin | | | RoHS Compliant | | |
| Temperature: 105°C (221°F) | | | UKCA | | |
| Strip Length: 0.47"-0.55" (12-14mm) | | | UL 94 V2 Flame Rating | | |
| Color: Blue/Transparent | | | | | |
| WIRE RANGE: | | | | | |
| Conductor Type: | | AWG | | STRIP LENGTH | |
| Copper (Solid & Stranded) | | 22 - 10 AWG (0.5-6mm ²) | | 0.47"-0.55" (12-14mm) | |
| Solid Copper-Clad Aluminum | | 12 - 10 AWG | | | |
| Stranded Copper Tin Bonded | | 22 - 10 AWG | | | |
| Listed for use with Cu AND CC-Cu. Do not use on Aluminum. | | | | | |
| DIMENSIONS: | | | | | |
|  | | | | | |
| ORDERING INFO: | | | | | |
| Catalog # | Model | Ports | Quantity | Weight Lbs. (Kg) | |
| 30-16L32 | L32 | 2 | Box of 1,000 | 8.11 (3.67) | |
| 30-16L33 | L33 | 3 | Box of 1,000 | 11.51 (5.22) | |
| 30-16L35 | L35 | 5 | Box of 500 | 9.44 (4.28) | |
| FACTORY CONTACT: | | | NOTES: | | |
| | | | | | |
| REVISED: August 2024 | | | | | |