

## CLAMP ON HiTESTER SERIES

Field measuring instruments



A Full Line-up of Digital and Analog  
Clamp Meters to Suit Any Need



[www.hioki.com](http://www.hioki.com)

From Basic Testing to

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

# Selection Guide

## A Complete HIOKI Digital & Analog Clamp Tester

|                                                   | <b>3291-50</b> True RMS                                   | <b>3280-10</b> MEAN value<br><b>3280-20</b> True RMS                                                                                                                        | <b>3281</b> True RMS<br><b>3282</b> True RMS                                                                                                                          | <b>3287</b> True RMS<br><b>3288</b> MEAN value<br><b>3288-20</b> True RMS                                                                                                                    | <b>3284</b> True RMS<br><b>3285</b> True RMS<br><b>3285-20</b> True RMS                                    |
|---------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| AC Current ranges                                 | 60.00/600.0/1000 A AC                                     | 42.00/420.0/1000A AC                                                                                                                                                        | 3281: 30.00/300.0/600A AC<br>3282: 30.00/300.0/1000A AC                                                                                                               | 3287: 10.00/100.0A AC/<br>3288/-20: 100.0/1000A AC                                                                                                                                           | AC, AC+DC<br>(True RMS or Peak value)<br>3284: 20.00/200.0A AC<br>3285/3285-20: 200.0/2000A AC             |
| Other current ranges                              | None                                                      | None                                                                                                                                                                        | Wave peak value at AC Current<br>3281: 75.0 to 1000A peak<br>3 ranges<br>3282: 75.0 to 1700A peak<br>3 ranges                                                         | DC current range<br>3287: 10.00 or 100.0 A DC, 2 ranges<br>3288/-20: 100.0 or 1000 A DC, 2 ranges                                                                                            | DC (Average or Peak value)<br>3284: 20.00/200.0A DC<br>3285/3285-20: 200.0/2000A DC                        |
| AC Voltage ranges                                 | None                                                      | 4.200/42.00/420.0/600V AC                                                                                                                                                   | 300.0/600V AC                                                                                                                                                         | 3287: 4.200/42.00/420.0/600V AC<br>3288/-20: 4.200/42.00/420.0/600V AC                                                                                                                       | AC, AC+DC<br>(True RMS or Peak value)<br>30.00/300.0/600V AC                                               |
| Other voltage ranges                              | None                                                      | DC voltage range:<br>420.0m/4.200/42.00/420.0/600V DC                                                                                                                       | Wave peak value at AC voltage<br>up to 750/1000V peak                                                                                                                 | DC voltage range:<br>420.0m/4.200/42.00/420.0/600 V DC                                                                                                                                       | DC (Average or Peak value)<br>30.00/300.0/600V DC                                                          |
| Other functions                                   | None                                                      | Resistance:<br>420.0 to 42.00 MΩ, 6 ranges<br>Accuracy: ±2.0 % rdg. ±4 dgt.<br>(at 420 to 420 kΩ range)<br>Continuity: 420.0Ω (Buzzer<br>sounds less than approx. 50Ω ±40Ω) | Distortion check:<br>1 to 5 Crest factor<br>Resistance: 1k or 10kΩ range<br>Frequency: 30.0 to 1000 Hz<br>Mode: Slow/Peak/C.F./RMS<br>Record mode/Auto-off/Conduction | Resistance: 420.0Ω/4.200Ω/42.00kΩ/<br>420.0kΩ/4.200MΩ/42.00MΩ<br>Accuracy: ±2.0% rdg. ±4 dgt.<br>(at 420 to 420kΩ range)<br>Continuity: 420.0Ω (Buzzer sounds<br>less than approx. 50Ω ±40Ω) | Resistance: 1k or 10kΩ range<br>(3285-20 only)                                                             |
| Analog output<br>Printer output                   | None                                                      | None                                                                                                                                                                        | None                                                                                                                                                                  | None                                                                                                                                                                                         | DC, or AC 1V / f.s.<br>Level output with REC mode<br>Waveform output with MON mode<br>(except for 3285-20) |
| Basic accuracy<br>(at 50 or 60Hz)                 | AC current: ±1.5 % rdg. ±5 dgt.                           | AC current: ±1.5 % rdg. ±5 dgt.<br>AC voltage: ±2.3 % rdg. ±8 dgt.<br>DC voltage: ±1.3 % rdg. ±4 dgt.<br>Continuity: ±2.0 % rdg. ±6 dgt.                                    | AC current: ±1% rdg. ±5 dgt.<br>AC voltage: ±1% rdg. ±3 dgt.<br>Peak: ±3% rdg. ±5 dgt.<br>Frequency: ±0.3% rdg. ±1 dgt.                                               | AC current: ±1.5 % rdg. ±5 dgt.<br>AC voltage: ±2.3 % rdg. ±8 dgt.<br>DC current: ±1.5 % rdg. ±5 dgt.<br>DC voltage: ±1.3 % rdg. ±4 dgt.<br>Continuity: ±2.0 % rdg. ±6 dgt.                  | AC current: ±1.3% rdg. ±3 dgt.<br>AC voltage: ±1.0% rdg. ±3 dgt.<br>Frequency: ±0.3% rdg. ±1 dgt.          |
| Frequency characteristics<br>AC current / voltage | 45 to 400Hz                                               | AC voltage: 50 to 500Hz<br>AC current:<br>50 or 60Hz (3280-10)<br>40 to 1kHz (3280-20)                                                                                      | 40 to 1000 Hz                                                                                                                                                         | AC current: 3287 DC, 10 to 1kHz<br>AC current: 3288/-20 DC, 10 to 500Hz<br>AC voltage: 30 to 500Hz                                                                                           | 3284: DC, 10 to 2kHz<br>3285/3285-20: DC, 10 to 1kHz                                                       |
| Display                                           | Digital /LCD,<br>maximum 6000 dgt.<br>Bar graph / 91 seg. | Digital /LCD,<br>maximum 4199 dgt.                                                                                                                                          | Digital /3000 dgt.<br>Bar graph /35 seg.                                                                                                                              | Digital /LCD,<br>maximum 4199 dgt.                                                                                                                                                           | Current / 2500 dgt.<br>Voltage / 3750 dgt.<br>Bar graph /35 seg.                                           |
| Sampling rate                                     | Maximum 1.1 sec                                           | 2.5 times /sec or 1 time /3 sec                                                                                                                                             | 2 or 4 times /sec<br>(Slow: 1 time /3 sec)                                                                                                                            | 2.5 times /sec                                                                                                                                                                               | 2 or 4 times /sec<br>(Slow: 1 time /3 sec)                                                                 |
| Crest factor<br>(RMS)                             | 2.8 or less<br>(1.68 at 1000 A range)                     | 3280-10: Not defined<br>3280-20: 2.5 or less                                                                                                                                | 3281: 2.5 (1.7 at 600A range)<br>3282: 2.5 (1.7 at 1000A range)                                                                                                       | 3287: 2.5 (150A, 100V maximum)<br>3288: Not defined<br>3288-20: 3 (1000A/2 max, voltage/1.5 max.)                                                                                            | 3284: 2.5 (1.5 at 200A range)<br>3285/3285-20: 2.5 (1.42 at 2000A range)                                   |
| Effect of external magnetic fields                | Yes; level not defined                                    | Yes; level not defined                                                                                                                                                      | 3281: 1.5A equivalent max.<br>at 400 A/m<br>3282: 0.2A equivalent max.<br>at 400 A/m                                                                                  | Yes; level not defined                                                                                                                                                                       | 3284: 0.5A equivalent max.<br>at 400 A/m<br>3285/ 3285-20: 2.0A equivalent max.<br>at 400 A/m              |
| Max. rated voltage to earth                       | 600 V AC rms                                              | 600V AC rms                                                                                                                                                                 | 600V AC rms                                                                                                                                                           | 600 V AC rms                                                                                                                                                                                 | 600V AC rms                                                                                                |
| Measurement categories (A)                        | CAT III 600V<br>CAT IV 300V                               | CAT III 600V                                                                                                                                                                | CAT III 600V (3281)<br>CAT IV 600V (3282)                                                                                                                             | CAT III 600V                                                                                                                                                                                 | CAT III 600V                                                                                               |
| Measurement categories (V)                        | None                                                      | CAT III 300V<br>CAT II 600V                                                                                                                                                 | CAT IV 600V                                                                                                                                                           | CAT III 300V<br>CAT II 600V                                                                                                                                                                  | CAT III 600V                                                                                               |
| Core jaw dia                                      | φ30 mm                                                    | φ33 mm                                                                                                                                                                      | 3281: φ33 mm<br>3282: φ46 mm                                                                                                                                          | φ35 mm                                                                                                                                                                                       | 3284: φ33 mm<br>3285/3285-20: φ55 mm                                                                       |
| Power supply                                      | CR2032 (3VDC) × 1                                         | CR2032 (3 VDC) × 1                                                                                                                                                          | 6F22 (006P) × 1                                                                                                                                                       | CR2032 (3VDC) × 1                                                                                                                                                                            | 6F22 (006P) × 1<br>or AC adapter<br>(except for 3285-20)                                                   |
| Dimensions and mass                               | 50W × 136H × 26D mm/115 g                                 | 57W × 175H × 16D mm /100 g                                                                                                                                                  | 3281:<br>62W × 216.5H × 39D mm/350 g<br>3282:<br>62W × 231H × 39D mm/400 g                                                                                            | 3287:<br>57W × 180H × 16D mm/170 g<br>3288/-20:<br>57W × 180H × 16D mm/150 g                                                                                                                 | 3284:<br>62W × 230H × 39D mm, 460 g<br>3285/3285-20:<br>62W × 260H × 39D mm, 540 g                         |

### New insulated sleeves prevent short-circuits

No sleeves attached to the tip of test leads?  
**DANGER of short-circuit accident!!**



With sleeve attached to the tip of test leads,  
**short-circuit accidents can be prevented.**



Conforms to safety standard  
IEC61010-031 (revised) for hand-held probes

What are the new and additional requirements of the international safety standards?

1. "Exposed metal part must be 4mm or shorter" (Previously, 19mm max.)

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

## Line-up to Suit Your Needs

| 3290 True RMS<br>3290-10 True RMS                                                                                                                      | 3293-50 True RMS                                          | 3283 True RMS                                                                                                 | 3286-20 True RMS                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3290/-10+CT9691: 20.00A/100.0A AC<br>3290-10+CT9692: 20.00A/200.0A AC<br>3290/-10+CT9693: 200.0A/2000A AC<br>AC+DC, AC True RMS, AC MEAN               | 30.00 m/300.0 m/<br>6.000/60.00/600.0/1000 A AC           | 10.00m/100.0m/<br>1.000/10.00/200.0 A AC                                                                      | 20.00/200.0/1000 A AC                                                                                                                                                                  |
| 3290/-10+CT9691: 20.00A/100.0A DC<br>3290/-10+CT9692: 20.00A/200.0A DC<br>3290/-10+CT9693: 200.0A/2000A DC                                             | None                                                      | None                                                                                                          | None                                                                                                                                                                                   |
| None                                                                                                                                                   | None                                                      | None                                                                                                          | 150.0/300.0/600 V AC                                                                                                                                                                   |
| None                                                                                                                                                   | None                                                      | None                                                                                                          | None                                                                                                                                                                                   |
| Frequency :<br>10.00Hz/100.0Hz/1000 Hz                                                                                                                 | None                                                      | Frequency: 30.0 to 1000 Hz<br>Filter function:<br>180Hz±30Hz/-3dB                                             | Power (Single-phase or 3 phase):<br>3kW to 600kW(Single-phase)<br>6kW to 1200kW(3-phase)<br>Power factor, Phase angle:<br>Frequency: 30.0 to 1000Hz<br>Voltage/current harmonic levels |
| DC, or AC Current : 2V/f.s.<br>Level output with REC mode<br>Waveform output with MON mode<br>Integ./Frequency : 1V/f.s.                               | None                                                      | DC, or AC 1V / f.s.<br>(200A range: 2V / f.s.)<br>Level output with REC mode<br>Waveform output with MON mode | None                                                                                                                                                                                   |
| AC/DC/AC+DC Current:<br>±1.3 % rdg. +3 dgt. (Typical)<br>Frequency:<br>±0.3 % rdg. +1 dgt. (Typical)                                                   | AC current: ±1.5 % rdg. ±5 dgt.                           | 10m to 10A range:<br>±1.0 % rdg. ±5 dgt.<br>200A range: ±1.5 % rdg. ±5 dgt.<br>Frequency: ±0.3 % rdg. ±1 dgt. | AC current: ±1.3 % rdg. ±3 dgt.<br>AC voltage: ±1.0 % rdg. ±3 dgt.<br>Power: ±2.3% rdg. ±5 dgt.(1f)<br>±3.0% rdg. ±10 dgt.(3f)<br>(Accuracy guaranteed only for<br>50/60Hz cosφ=1)     |
| DC to 500Hz (CT9691)<br>DC to 1kHz (CT9692, CT9693)<br>±2.3 % rdg. + 8 dgt.                                                                            | 45 to 400Hz                                               | 40 to 2 kHz                                                                                                   | AC current: 45 to 1kHz<br>AC voltage: 30 to 1kHz                                                                                                                                       |
| Digital / LCD<br>maximum 3000 dgt.<br>Bar graph / 20 seg.<br>3290-10 maximum 9999 dgt.                                                                 | Digital /LCD,<br>maximum 6000 dgt.<br>Bar graph / 91 seg. | Digital /2000 dgt.<br>Bar graph /35 seg.                                                                      | Digital /LCD,<br>maximum 6000 dgt.                                                                                                                                                     |
| 3290 FAST : 4 times/sec<br>(3290-10 AC, AC+DC FAST: 10 times/sec)<br>Normal : 2 times/ sec<br>Slow : 1 time / 3sec                                     | Maximum 1.1 sec                                           | 2 or 4 times /sec<br>(Slow: 1 time /3 sec)                                                                    | Normal: 1 time /sec<br>(Slow: 1 time /3 sec)                                                                                                                                           |
| 2.5 or less                                                                                                                                            | 2.8 or less<br>(1.68 at 1000 A range)                     | 2.5 (1.5 at 200A range)                                                                                       | 2.5 (1.7 at 1000 A, 600 V range)                                                                                                                                                       |
| CT9691 : 0.5 A equivalent max. at 400 A/m<br>CT9692 : 0.7 A equivalent max. at 400 A/m<br>CT9693 : 2.0 A equivalent max. at 400 A/m                    | 7.5 mA equivalent max.<br>at 400 A/m                      | 7.5 mA equivalent max.<br>at 400 A/m                                                                          | 1.00 A equivalent max.<br>at 400 A/m                                                                                                                                                   |
| 600 V AC rms                                                                                                                                           | 300 V AC rms                                              | 300 V AC rms                                                                                                  | 600 V AC rms                                                                                                                                                                           |
| CAT III 600V (Sensor rating)                                                                                                                           | CAT III 300V                                              | CAT III 300V                                                                                                  | CAT III 600V                                                                                                                                                                           |
| None                                                                                                                                                   | None                                                      | None                                                                                                          | CAT III 600V                                                                                                                                                                           |
| CT9691 : φ35 mm CT9692 : φ33 mm<br>CT9693 : φ55 mm                                                                                                     | φ24 mm                                                    | φ40 mm                                                                                                        | φ55 mm or 80mm busbar                                                                                                                                                                  |
| LR6 (AA) alkaline batteries × 4<br>or AC adapter<br>or +8.4 to 15.6 VDC external power<br>(3290-10 only)                                               | CR2032 (3VDC) × 1                                         | 6F22 (006P) × 1 or AC adapter                                                                                 | 6LR61/6LF22 (006P) × 1                                                                                                                                                                 |
| 3290/-10 : 155W × 98H × 47D mm/545 g<br>CT9691 : 53W × 129H × 18D mm/230 g<br>CT9692 : 62W × 167H × 35D mm/410 g<br>CT9693 : 62W × 196H × 35D mm/500 g | 50W × 130H × 26D mm/135 g                                 | 62W × 225H × 39D mm/400 g                                                                                     | 100W × 287H × 39D mm /650 g                                                                                                                                                            |

| Accessories : TEST LEAD L9208/ L9207-10/ L9207-30 |               |                                                                                                                                                         |
|---------------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sleeve attached                                   | CAT IV 600V   | When the CAT (measurement category) rating of the main unit is lower than that of test leads, the CAT of the main unit is determined by the test leads. |
|                                                   | CAT III 1000V |                                                                                                                                                         |

Sleeve attached

CAT III, CAT IV

Sleeve

included as a



No sleeve attached

CAT I, CAT II

Detachable!

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)
[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

# Pocket size CLAMP SERIES

## CLAMP ON AC/DC HiTESTER

### 3280-10 3280-20

#### Easy operation !

- 3280-10: MEAN Value / 3280-20: True RMS
- AC 1000 A clamp aperture: 33 mm dia.
- 100g light and 16mm slim
- Independent-opening double-lever design
- Slim body allows easy clamping even for narrow conductors
- No metal (iron core) exposure, ensuring enhanced safety



#### Accessories

TEST LEAD L9208 x1  
CARRYING CASE 9398 x1  
Instruction manual x1

3280-20

**3 years**  
Guaranteed for 3 years

CE

DROP PROOF

**True RMS**  
3280-20



## CLAMP ON AC/DC HiTESTER

### 3287 3288 3288-20

#### Compact & easy, one-touch maintenance on all types of AC/DC equipment

- New Model 3288-20 True RMS AC/DC pocket clamp meter measuring up to 1000 A further expands the HIOKI lineup
- The 3287 can handle even cogenerator / inverter energy-saving equipment (10/ 100A)
- Use the 3288 for high current measurements such as UPS emergency batteries and train motors (100/ 1000A)
- A slim core of only 10 mm (0.39") for easy clamping even in crowded wiring

#### Accessories

TEST LEAD L9208 x1  
CARRYING CASE 9398 x1  
Instruction manual x1

**3 years**  
Guaranteed for 3 years

CE

**True RMS**  
3287/ 3288-20



### True RMS vs. MEAN Value

Two ways to convert alternating current to RMS are "true RMS response" and "average rectified RMS response" (averaging). Both display the same value for a sine wave, but can display very different values for distorted waveforms.



When measuring current waveforms distorted by inverters...



**True RMS**

AUTO  
~ 8.56 A

High-frequency waveform components are included in the calculated RMS display value.

**MEAN Value**

AUTO  
~ 7.35 A

The measured waveform is treated as a single-frequency (undistorted) sine wave, and the calculated average of the AC signal is converted to an RMS display value. Measurement error increases with waveform distortion.

■ As inverters and switching power supplies proliferate, the need for the capability to measure distorted

# HIGH PERFORMANCE CLAMP SERIES

## DIGITAL CLAMP ON HiTESTER 3281 3282

**The true RMS is shown in the distorted waveform**

- 3281: 600A ACrms,  $\Phi 33$ mm dia.
- 3282: 1000A ACrms,  $\Phi 46$ mm dia.
- Non-fuse type protects up to 600VAC

### Accessories

TEST LEAD L9207-10 x1  
CARRYING CASE 9399 x1  
Hand strap x1  
Instruction manual x1



3281

3282



## CLAMP ON AC/DC HiTESTER 3284 3285 3285-20

**Analysis for DC to distorted waves**

- 3284: 200 Arms, clamp aperture: 33 mm dia.
- 3285: 2000 Arms, clamp aperture: 55 mm dia.
- 3285-20: With resistance measurement range  
No analog output  
Cannot be used with AC adapter
- Inrush current peak value
- RMS value of full-wave rectified waveforms
- Waveform and harmonic analysis




3285

3285-20




### Inrush current peak value

The peak hold function displays the peak value of the inrush current occurring when electrical equipment is started.




### RMS value of full-wave rectified waveforms

The AC+DC mode enables measurement of the RMS value of full- or half-wave rectified waveforms used in electrical machinery.



### Easily monitor current fluctuations

Using the external output functions of the 3284 or 3285 in combination with a HIOKI Memory HiCorder enables



### Accessories

TEST LEAD L9207-10 x1  
CARRYING CASE (for 3284) 9399 x1  
CARRYING CASE (for 3285, 3285-20) 9345 x1  
Hand strap x1  
Instruction manual x1

### Options

AC ADAPTER (for USA) 9445-02  
AC ADAPTER (for EU) 9445-03  
CLAMP ON ADAPTER 9290-10  
OUTPUT CORD (Not CE marked) 9094

3284



# Flip CLAMP and Detachable Designs

## CLAMP ON HiTESTER 3291-50

**Easily read measured values from all heights with the adjustable display**

FLIP  
CLAMP

- Innovative flip clamp design
- Flip display to see measurement readings from any angle
- Max. 1000A, 3 ranges, Bar graph display
- Filter out high frequency noises for a clean signal

CE  
True RMS




Displayed values automatically invert when flipped open!



You can also push a button to manually invert the display.

**Flip Display!**  
**Easy-to-read measurements**

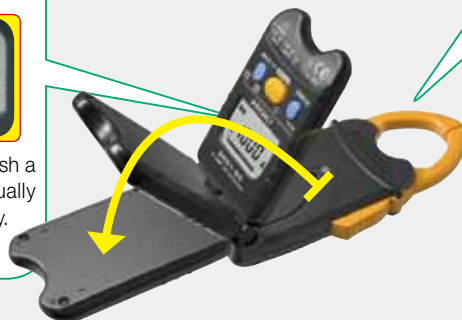


**Slim sensor**

**8mm**

Model 3291-50 can clamp on wires spaced only 12.5 mm apart.

**LED backlight**



### Accessories

CARRYING CASE 9757 x1  
Hand strap x1  
Instruction manual x1

## CLAMP ON AC/DC HiTESTER 3290 3290-10 CLAMP ON AC/DC SENSOR CT9691 CT9692 CT9693

**All the Functions You Need for Measurement at DC or 1Hz and Up**

- Choice of three sensors (Example combinations)  
3290/-10 +CT9691 : Measure up to 100A (φ35mm)  
3290/-10 +CT9692 : Measure up to 200A (φ33mm)  
3290/-10 +CT9693 : Measure up to 2000A (φ55mm)
- Choice of measurement methods  
DC (for battery measurement)  
AC+DC RMS (for full-/ half-wave rectification measurement)  
AC RMS (for current distortion measurement)  
PEAK (for peak value measurement of inrush current, etc.)
- Choice of output (Simultaneous output)  
RMS value output, frequency output, waveform output
- Choice of response times (Switchable among three response times)
- LPF function (filters out unnecessary harmonics : fc=550Hz)
- 3290-10 Functions  
Current integral measurement

3290-10



CT9692

3290



CT9691

3 years  
Guaranteed for 3 years

CE  
True RMS

Measurement is not available with only the **CLAMP-ON AC/DC HiTESTER 3290 or 3290-10**. A **CLAMP-ON AC/DC SENSOR** (Model CT9691, CT9692 or CT9693) must also be purchased separately.

### Accessory

Hand strap x1 Instruction manual x1

### Options

CLAMP ON AC/DC SENSOR (100A) CT9691 OUTPUT CORD

9094

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

# Leak CLAMP SERIES

## CLAMP ON LEAK HiTESTER 3293-50

**Easily read measured values from all heights with the adjustable display**

FLiP  
CLAMP

- Measure for leakage current and load all with the same device
- Innovative flip clamp design
- Flip display to see measurement readings from any angle
- 1mA to 1000A accuracy guaranteed, 6 ranges and bar graph display
- Measure and display only the leakage current of commercial frequency components using the filter function

CE  
True RMS



**Easy-to-read measurements  
Adjustable display angle!**



**Convenient  
pocket-size  
design**

**Slim sensor  
11mm**



**LED backlight**

### Accessories

CARRYING CASE 9757 x1  
Hand strap x1  
Instruction manual x1


## CLAMP ON LEAK HiTESTER 3283

**Easily monitor leakage current fluctuations**


- High-sensitivity with a full scale of 10mA (resolution:10 $\mu$ A)
- High-accuracy at  $\pm 1\%$
- True RMS measurement
- Analyzer functions, for filtering and output signals
- Wide bandwidth, 5Hz to 15kHz (Monitor output)

### Filtering

Sharp Low-pass filter reduces harmonic currents.

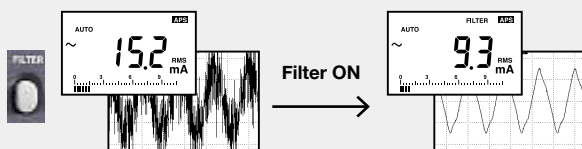

### Output signal

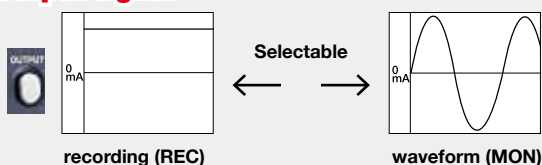

### Easily monitor leakage current fluctuations

In combination with a HIOKI Memory HiCorder the 3283 can be



CE



Insulated  
conductor

True RMS



### Accessories

CARRYING CASE 9399 x1  
Hand strap x1  
Instruction manual x1

### Options

|                      |         |
|----------------------|---------|
| AC ADAPTER (for USA) | 9445-02 |
| AC ADAPTER (for EU)  | 9445-03 |
| CLAMP ON ADAPTER     | 9290-10 |
| OUTPUT CORD          | 9094    |
| (Not CE marked)      |         |
| CONNECTOR ADAPTER    | 9199    |

# Power Measuring

## CLAMP ON POWER HiTESTER 3286-20



### All powerful ! Easy operation ! True-RMS Clamp-on Power Meter !

- Use as a single-phase power meter or power factor meter (3kW to 600kW range)
- Simple checking of three-phase lines (6kW to 1200kW range)
- Check power supply fluctuations
- 1000 A, 1000 Hz, peak and harmonic measurement
- True RMS (effective value) display method



#### Basic specifications

|                                              |                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measurement lines                            | Single-phase/two-wires, Three-phase/three-wires (balanced load only)                                                                                                                                                                                                                                                                                        |
| Measurement items                            | Voltage, current, voltage/current peak, effective/reactive/apparent power(Single-phase or 3-phase), power factor, reactivity, phase angle, frequency, phase detection(3-phase), voltage/current harmonic levels(up to 20th)                                                                                                                                 |
| Measurement ranges                           | Voltage: 150.0 V to 600 V, 3 ranges, Current: 20.00 to 1000 A, 3 ranges, Power: 3.000 kW to 1200 kW, 18 combination patterns,<br>Note: 3-phase power is calculated and displayed on the basis of a balanced, 50/60 Hz, sine wave input. For apparent power and reactive power, the unit of watts in the above table is replaced by VA and var respectively. |
| Basic accuracy<br>at 50/60 Hz, $\cos \phi=1$ | Power/single-phase: $\pm 2.3\%$ rdg. $\pm 5$ dgt., Power/3-phase: $\pm 3.0\%$ rdg. $\pm 10$ dgt. (at balanced load)<br>Voltage: $\pm 1.0\%$ rdg. $\pm 3$ dgt. (True RMS), Current: $\pm 1.3\%$ rdg. $\pm 3$ dgt. (True RMS)                                                                                                                                 |
| Frequency characteristics                    | AC current : 45 to 1 kHz<br>AC voltage : 30 to 1 kHz                                                                                                                                                                                                                                                                                                        |
| Other functions                              | Phase detection, Record (Max. value/Min. value), Battery capacity display, Data hold, Auto power off                                                                                                                                                                                                                                                        |

#### Accessories

VOLTAGE CORD L9635-01 x1  
CARRYING CASE 9245 x1  
Hand strap x1  
Instruction manual x1

**⚠ WARNING** Inspect the unit and check that it is operating correctly before use. When carrying out measurement on live lines, wear proper protective gear, insulating rubber gloves, insulating rubber boots and safety helmet, and use extreme caution to avoid electric shock accidents.

**⚠ DANGER** In order to prevent short-circuits and injury, use the clamp product on electrical circuits with a voltage less than the maximum operation circuit voltage.

*Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.*

# HIOKI

HIOKI E. E. CORPORATION

#### HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 FAX +81-268-28-0568  
<http://www.hioki.com/> E-mail: os-com@hioki.co.jp

#### HIOKI (Shanghai) SALES & TRADING CO., LTD.:

TEL +86-21-63910090 FAX +86-21-63910360  
<http://www.hioki.cn/> E-mail: info@hioki.com.cn

#### DISTRIBUTED BY

#### HIOKI INDIA PRIVATE LIMITED:

TEL +91-124-6590210 FAX +91-124-6460113  
E-mail: hioki@hioki.in

#### HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: info@hioki.com.sg

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

<http://www.hioki.com/> E-mail: os-com@hioki.co.jp

All information correct as of Oct. 1, 2013. All specifications are subject to change without notice.

ClampsE5-3XB Printed in Japan