Precision Levels








Precision Levels

Revolutionary Design and Maximum Performance

IDEAL Electrical new Precision Levels are designed for both conduit and regular level applications, providing some of the most accurate features in the industry.


- Entire chassis is CNC machined from 6061 T6 aluminum billet for straightness.
- 3.5" and 6" levels feature an integral Thumb Winder™ conduit wheel with a
 contoured screw designed for non-slip grip and stability that prevents doglegs in
 complex conduit bends.
- Corrosion resistant brass screw for easy vial replacement instead of plastic or glued caps.
- Oversized neodymium rare earth magnets provide the highest magnetic field strength and stability.
- Bottom surface features a v-groove for conduit surface coverage and holding power.
- Each level features a bull's eye vial to align X and Y axis points.

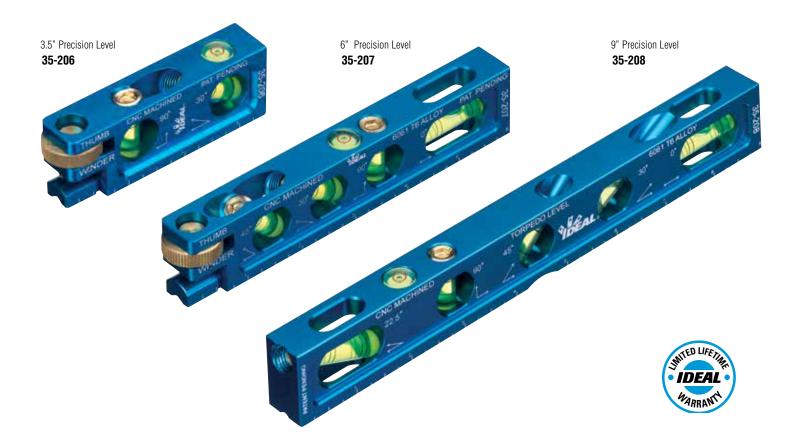

Oversized neodymium rare earth magnets provide optimum strength. And the custom v-groove geometry provides greater surface area for better holding power.










Precision Levels

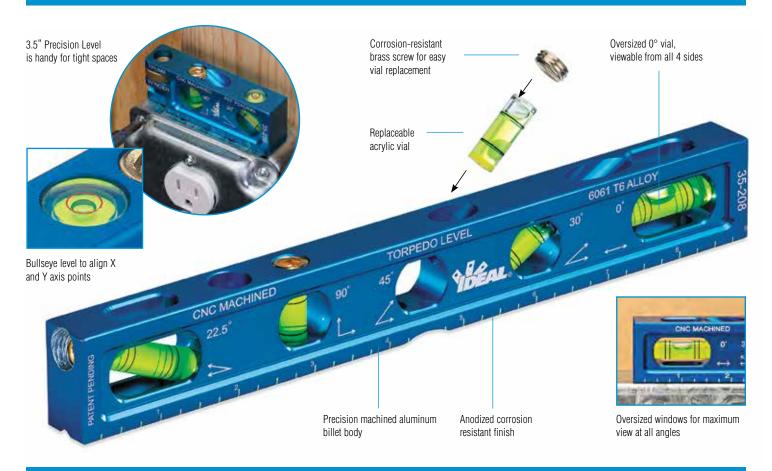



Acrylic Vial Replacement Instructions

The most frequent failure of spirit levels is damage to the vials. IDEAL Precision Levels feature tough, molded acrylic vials with shock-absorbing rubber O-rings, which virtually eliminate shock damage to the vials. Additionally, unlike most competitors' vials, which are typically glued into their levels, IDEAL vials are designed for easy field replacement.



1. Remove the set screw with hex wrench



2. Remove O-ring and damaged vial



3. Insert new vial



4. Reinstall O-ring and set screw

LIFETIME WARRANTY

Limited Lifetime warranty guaranteed to be free from defects in material and workmanship for their normal life. Liability is limited to the replacement of an inoperative unit. NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IDEAL is not liable for consequential damages.



Form No. P-5265 ©2016 IDEAL INDUSTRIES, INC.