

# SERIES 4000

## Description

The Series 4000 Quick Opening Valve functions as in-line on-off switch particularly suited to applications in Instrumentation and Control Panels to open and close circuits or isolate gauges. The unique design of these valves permits full-closed to full-open operation quickly with a 60° turn of the knob. Standard units will detent in the selected position or, if desired, can be spring loaded (Option R) to return to the off position when released. The Series 4000 is offered in 2-way and 3-way designs. The 2-way design is a snap action on-off control, while the 3-way design offers the same snap on-off action while venting the downstream pressure to atmosphere when in the off position. These valves are compact in size and can be utilized for in-line and panel mount applications. Valves can be ordered Cleaned and Packaged for Oxygen service.



Model Q-44

## Technical Data

- Max Operating Pressure: 125 Psig (8.6 Bar)
- Temperature Range: -20°F to 300°F (-29°C to 149°C)
- Flow Coefficient (C<sub>v</sub>): 0.5
- 2-Way or 3-Way (vents downstream to atmosphere thru 3/32" orifice) Configurations
- 100% Factory Tested for Bubble Tight Shut Off
- Optional Spring Return to Close
- Standard Panel Mount:
  - Supplied with "Off – On" Aluminum Indicator Plate (1/16" thick, 1-5/8" diameter) and Panel Nut
  - 5/8" Panel Hole
  - 5/32" Maximum Panel Thickness



Model Q-45



## Materials of Construction

| Component  | Material               |
|--|------------------------|
| Body, Stem, Housing, Bonnet, Valve Seat, Valve Cup, Rollers, Locknut | Brass, ASTM B16        |
| Knob   | Thermosetting Phenolic |
| Indicator Plate  | Aluminum               |
| Spring   | 17-7 SS, ASTM A313     |
| Roller Pin   | Hardened Steel         |
| Set Screw  | Steel (Black Oxide)    |
| Valve Seal, O-Ring   | FKM                    |



Model QE-44

## QUICK OPENING VALVE

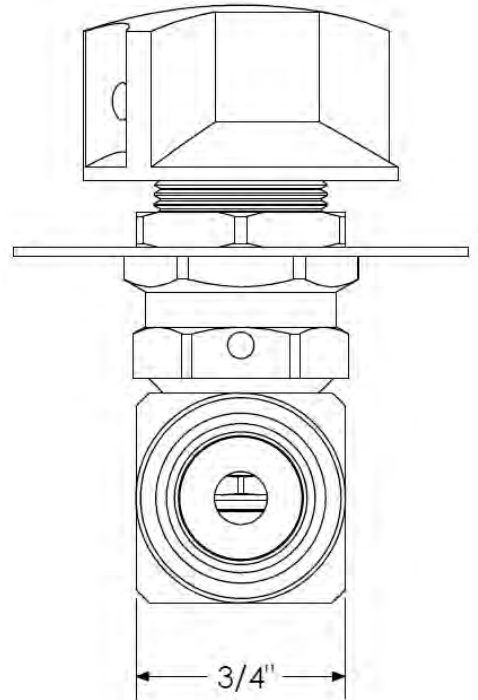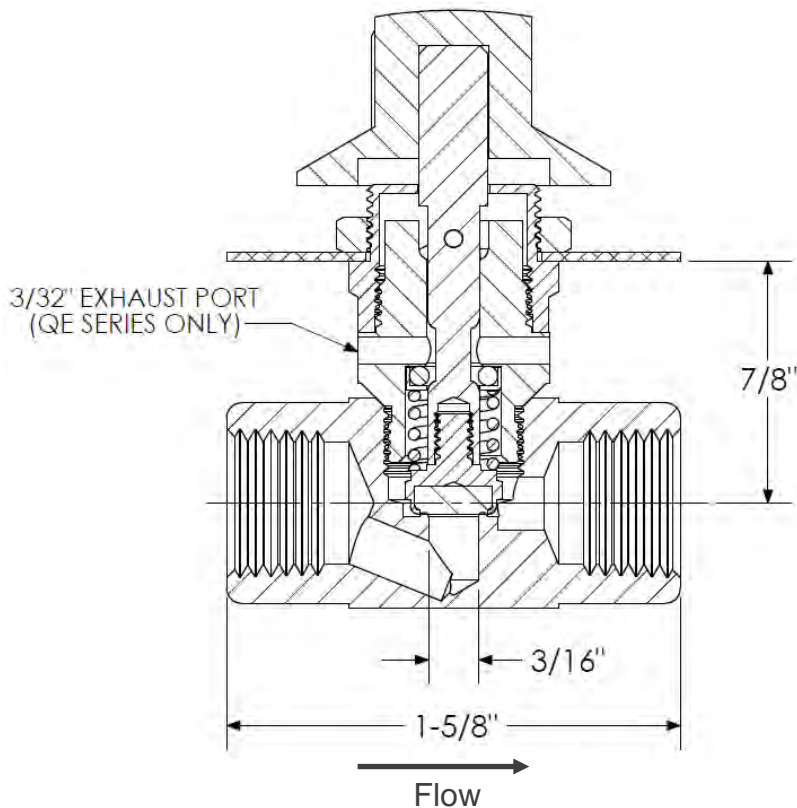

### How To Order

#### SERIES

Q - 2 Way Quick Opening Valve  
QE - 3 Way Quick Opening Valve  
(Exhausts downstream pressure to atmosphere)

#### PIPE SIZE (NPT)

41 - 1/8" Female x Female  
42 - 1/8" Male x Male  
43 - 1/8" Male x Female  
44 - 1/4" Female x Female  
45 - 1/4" Male x Male  
46 - 1/4" Male x Female

QE - 41 - R

#### OPTIONS

R - Snap Return to Off  
X - Cleaned and Packaged for Oxygen Service

PROPER COMPONENT SELECTION – When specifying a component, the total system design must be considered to ensure safe and trouble-free performance. Intended component function, materials compatibility, pressure ratings, installation, environment and maintenance are the responsibility of the system designer.

**GENERANT**