

HEAVY INDUSTRY



**KLEIN
TOOLS** 


For Professionals... Since 1857™

Find Quality Products Online at:

www.GlobalTestSupply.com

sales@GlobalTestSupply.com

Brass Sledge Hammers – Fiberglass Rubber Grip Handle

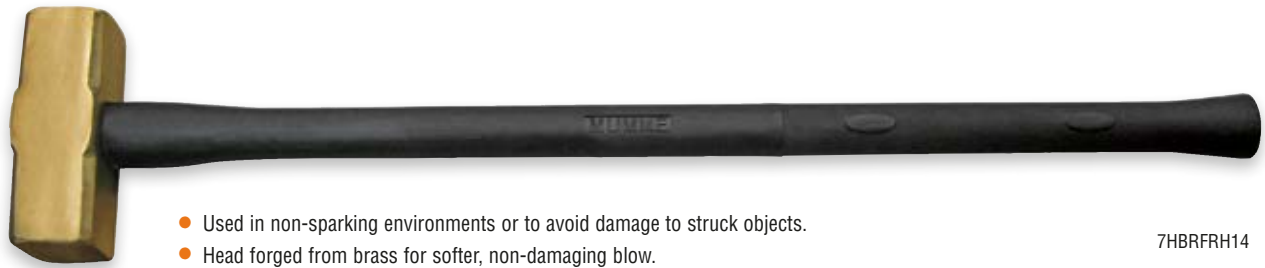

- Used in non-sparking environments or to avoid damage to struck objects.
- Head forged from brass for softer, non-damaging blow.
- Head is pinned to handle as well as epoxied to prevent head coming off.
- Comfortable, thick rubber grip handle for better protection from shock and vibration.
- Handle includes both overstrike protection and large sweep at base to prevent loss of grip.

7HBRFRH14

Cat. No.	Head Weight	Overall Length	Weight
7HBRFRH04	4 lbs. (1.81 kg)	16" (400 mm)	4.89 lbs. (2.22 kg)
7HBRFRH07	7 lbs. (3.17 kg)	32" (800 mm)	9.87 lbs. (4.48 kg)
7HBRFRH10	10 lbs. (4.53 kg)	36" (900 mm)	12.23 lbs. (5.55 kg)
7HBRFRH14	14 lbs. (6.35 kg)	36" (900 mm)	16.73 lbs. (7.59 kg)

Fox Wedges – Steel

- Used for splitting mating surfaces.
- Also used for leveling machinery and structures before fixing in place.
- Forged and ground blade with fine edge for easy entry.



5FW10025

Cat. No.	Width	Thickness	Overall Length	Weight
5FW07538	1-1/2" (38 mm)	1/2" (12 mm)	3" (75 mm)	0.35 lbs. (0.16 kg)
5FW10025	1" (25 mm)	5/16" (8 mm)	4" (100 mm)	0.22 lbs. (0.10 kg)
5FW17550	2" (50 mm)	1/2" (12 mm)	7" (175 mm)	1.01 lbs. (0.46 kg)
7FW27050	2" (50 mm)	1" (25 mm)	11" (270 mm)	4 lbs. (1.83 kg)

Fox Wedge – Stainless Steel

- Used for splitting mating surfaces and for packing machinery and structures before fixing.
- Also used in the marine environment because of its corrosion-resistant properties.
- Forged from stainless steel for greater hardness and non-magnetic properties.
- Ground blade with fine edge for easy entry.
- Correctly heat treated to best suit product application.



7FWSS10025

Cat. No.	Width	Thickness	Overall Length	Weight
7FWSS10025	1" (25 mm)	5/16" (8 mm)	4" (100 mm)	0.22 lbs (0.10 kg)

Hand-Saver Punches

- Used to safely drive out pins and keys in machinery.
- Long, two-handed rubber handle to lessen shocks from blows.
- Head attached with wire rope to reduce shock.
- Urethane ring around head to reduce likelihood of chipping.
- Heat-treated punch, so it will not shatter.



7WRP22

Cat. No.	Diameter	Shaft Length	Weight
7WRP13	1/2" (13 mm)	4-3/4" (120 mm)	2.98 lbs. (1.35 kg)
7WRP16	5/8" (16 mm)	4-3/4" (120 mm)	3.20 lbs. (1.45 kg)
7WRP19	3/4" (19 mm)	4-3/4" (120 mm)	3.64 lbs (1.65 kg)
7WRP22	7/8" (22 mm)	4-3/4" (120 mm)	4.41 lbs. (2.00 kg)
7WRP25	1" (25 mm)	4-3/4" (120 mm)	4.63 lbs. (2.10 kg)
7WRP32	1-1/4" (32 mm)	4-3/4" (120 mm)	5.29 lbs. (2.40 kg)


**KLEIN
TOOLS**
