




608 Single Input Manometer

APPLICATIONS

- Adjust appliance regulators
- Setting delivery pressures
- Leakage shut-in tests
- Regulator adjustments for pressure and lock-up tests

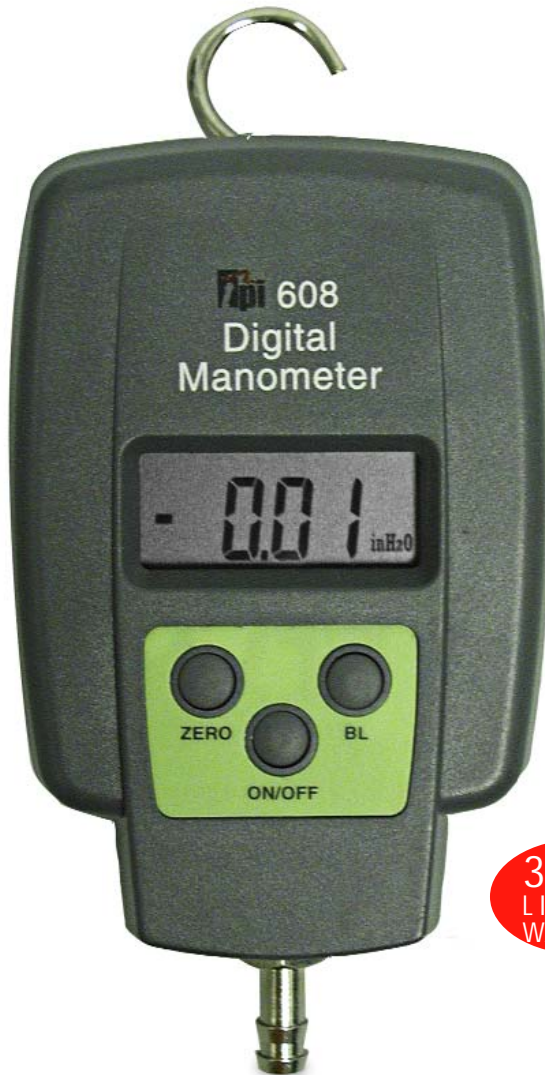

**3-YEAR
LIMITED
WARRANTY**

Turn over for
technical
information
and accessory
part numbers.

**The
Value
Leader™**

Features

- Four units of pressure: inH2O, mbar, kPa, and psi
- Temperature compensated
- Auto power off after 20 minutes
- Backlight display
- Wall hook and magnets for no-hand use



**TECHNICAL
SPECIFICATIONS
AND
ACCESSORIES**

608 Single Input Manometer

SPECIFICATIONS

Contents	inH2O	mbar	kPa	psi
Range	±60	±150	±15	±2.175
Resolution	0.01 to 29.9 30.0 to 60.0	0.01 to 29.99 30.0 to 150.0	0.01 to 2.999 3.00 to 15.00	0.001 to 2.175
Accuracy	±1% F.S.	±1% F.S.	±1% F.S.	±1% F.S.
Over pressure	up to 300 mbar (120 H2O, 30kPa, 5.3psi)			
Operating Temp.	-10° to 50°C			
Battery	LR6 9V alkaline			
Battery life	200 hour(typicall)			



L 608-0107
Copyright © 2007 Test Products International, Inc.