

IPAQ C530

Smart HART-compatible 2-wire Transmitter



IPAQ C530 is a modern, HART® temperature transmitter developed to meet the highest standards of accuracy and reliability. A universal transmitter compatible with RTD, thermocouples, voltage and potentiometer sensors. It is fully compatible with HART® 7 and offers extended diagnostic information, for example device error, sensor and wiring conditions. IPAQ C530 supports communication via NFC (Near-field communication) and Bluetooth® which makes it possible to configure and monitor the transmitter remotely.


- High accuracy and long term stability
- Accepts RTD, T/C, mV and ohm
- Sensor error and system (sensor/transmitter) error correction
- 50-point Customized Linearization and Callendar-Van Dusen
- Rugged design tested for 10 g vibrations
- Configuration via USB, without external power
- Runtime counter - hour counter for elapsed operational time
- Communicates with HART Communicator or PC via HART modem
- Integrated in Emerson AMS and Siemens PDM systems

Specifications:


Input RTD	2-, 3-, 4-wire connection
Pt100 ($\alpha = 0.00385$) ¹⁾	-200 to +850 °C / -328 to +1562 °F
PtX $10 \leq X \leq 1000$ ($\alpha = 0.00385$) ¹⁾	-200 to +850 °C / -328 to +1562 °F
Pt100 ($\alpha = 0.003916$) ²⁾	-200 to +850 °C / -328 to +1562 °F
Ni100 ³⁾ , Ni120 ⁴⁾	-60 to +250 °C / -76 to +482 °F
Ni1000 ³⁾	-50 to +180 °C / -58 to +356 °F
Cu10 ⁵⁾	-50 to +200 °C / -58 to +392 °F
Input Resistance / potentiometer	0 to 10000 Ω / 100 to 10000 Ω
Input Thermocouples	Types B, C, D, E, J, K, N, R, S, T
Input mV	-10 to +1000 mV
Sensor failure	Upscale (≥ 21.0 mA) or downscale (≤ 3.6 mA) action
Adjustments - Zero	Any value within range limits
Adjustments - Minimum spans	
Pt100, Pt1000, Ni100, Ni1000	10 °C / 18 °F
Resistance / potentiometer	10 Ω / 10 %
T/C, mV	2 mV
Output	4-20 mA / 20-4 mA, temperature linear
Operating temperature	-40 to +85 °C / -40 to +185 °F
Galvanic isolation	1500 VAC, 1 min
Power supply	IPAQ C530 8.5...36.0 VDC
	IPAQ C530X 8.5...30.0 VDC
Intrinsic safety	
IPAQ C530X ATEX:	II 1G Ex ia IIC T6...T4 Ga
IPAQ C530X IECEx:	Ex ia IIC T6...T4 Ga
IPAQ C530X FM US:	IS CL I Div 1 GP A-D, T6...T4 ⁶⁾
IPAQ C530X FM CA:	CL I Zn 0 AEx/Ex ia IIC T6...T4 Ga ⁶⁾
Typical accuracy	± 0.08 °C or ± 0.08 % of span
Mounting	DIN B head or larger, DIN-rail (with adapter)

¹⁾ IEC 60751, ²⁾ JIS C 1604, ³⁾ DIN 43760, ⁴⁾ Edison No. 7, ⁵⁾ Edison No. 15, ⁶⁾ T6...T4 are depending on effect


Input connections

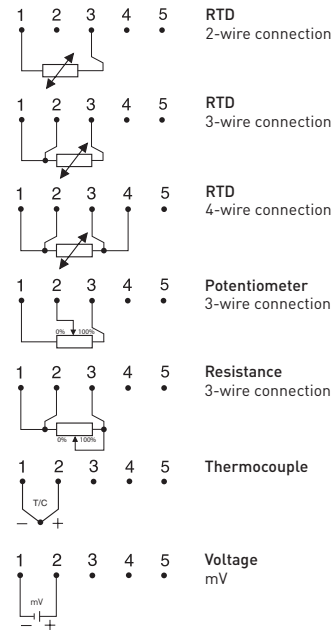


Output connections



Output load diagram



Dimensions

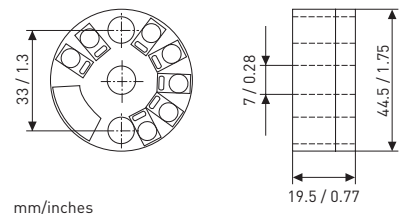

Ordering information

IPAQ C530	70C5300010
IPAQ C530X (ATEX, IECEx)	70C530X010
IPAQ C530X (cFMus, ATEX, IECEx)	70C530F010
ICON-X, PC configuration kit	70CFGUSX01
ICON-BT, Bluetooth® configuration kit	70CFGBT001