

Demand the Best. . . New!

Introducing the professional's new choice in high powered drain cleaning machines . . .

K-6200 Drain Cleaning Machine

The RIDGID/Kollmann K-6200 drum style drum cleaner provides the professional with a powerful yet compact machine for cleaning 3" to 6" drain lines. Superior maneuverability and a small footprint allow easy access to tight work areas. It comes equipped with either IC (Inner Core) cable for ultimate flexibility or IW (Integral Wound) cable, a new more durable solid core alternative cable. Several new features include:

New Torque Limiter – Causes the drum to slow down when the blade becomes lodged in a blockage. Protects cable by limiting potential for cable flipover.


Direct Drive Design – Powerful 4/10 Hp universal motor and gearbox bear down as torque builds. Audible warnings let operator know when blockage is encountered. Drum requires no adjustments to stay aligned and tight on drive shaft. Makes easy work of tough blockages such as roots and hardened grease.

Easy Maintenance Construction – Drum separates from machine in seconds. Inner drum and guide tube easily removed to maintain or replace cable.

Durable, Stable Design – Low center of gravity frame design and custom Kollmann kickstand keep machine firmly anchored during operation. Rugged, corrosion resistant polyethylene drum is rust and dent proof. Double tubular frame is lightweight and designed for extra strength.

Autofeed and Standard Accessories – Powerful feed mechanism is built to last and is easily maintained. Autofeed, toolbox, and selection of cutters included in all models.

Converts Easily to 1/2" Machine – Accepts K-3800 drum, with adaptors, to run up to 90' of 1/2" cable for use in floor drains and other interior piping systems up to 4".

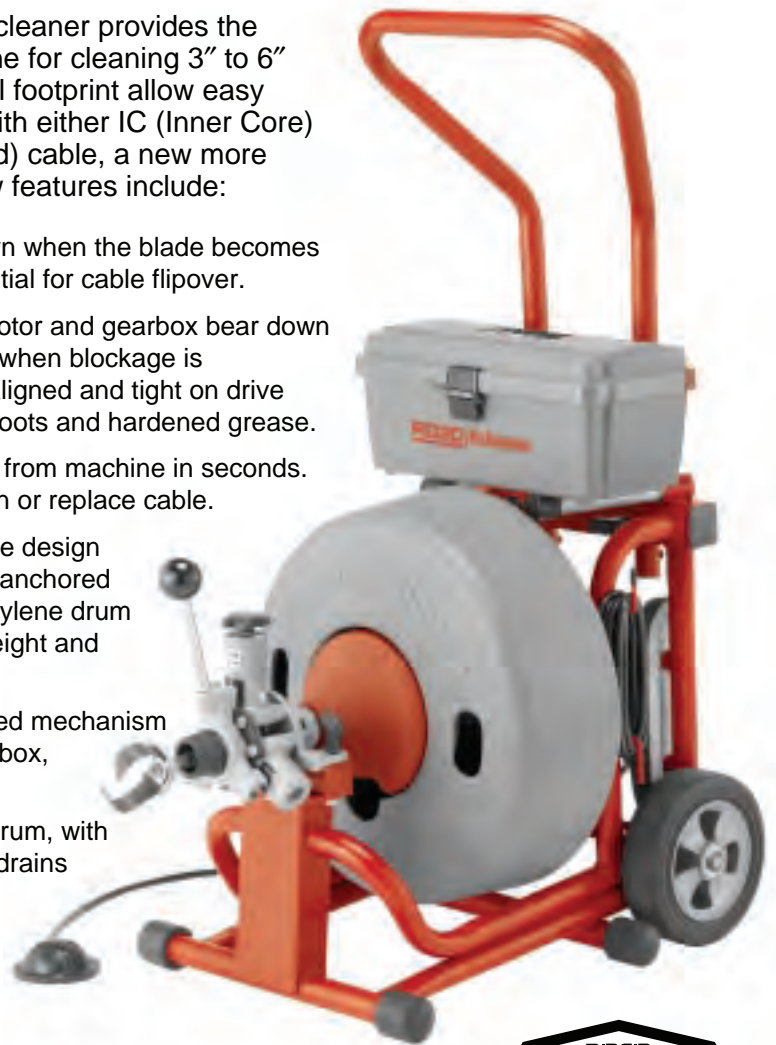

Ordering Information

Machine Options – Power Feed

Catalog No. 115V	Model No.	Description
95737	K-6200	Machine w/5/8" Pigtail & Standard Accessories
95732	K-6200 w/C-24	Machine, Standard Accessories and 5/8" x 100' Inner Core Cable
93557	K-6200 w/C-24-IW	Machine, Standard Accessories and 5/8" x 100' IW Solid Core Cable



Demand the Best ... Demand
RIDGID | Kollmann®

K-6200 Drain Cleaner

Specifications

Line Capacity 3" – 6" Lines, Up To 200 feet

Drum Capacity 100' of 5/8" Cable

Motor:

Type 115V/60 Hz, Reversible,
Universal AC Motor

Rating 4/10 HP, 285 RPM

Amps 5.6








Weight (Machine &
100 ft of Cable) 180 lbs.

Length 29 1/2"

Height 43.5" (max)

Width 19"






**Tools and Replacement Blades — Fits C-24,
C-25, C-26, C-27, C-24 IW, C25 IW, C-26 IW, C-27 IW,
C-24HC, C-27HC**

	Catalog No.	Model No.	Description	Replacement	
				Blade(s)	Holder*
	92485	T-403	P-Trap Cutter, 3"	92835	92900
	92490	T-404	P-Trap Cutter, 3 1/2"	92840	92900
	92495	T-406	Spear Blade	92850	92915
	92500	T-407	Retrieving Auger	—	—
	92505	T-408	Sawtooth Cutter	92890	92915
	51762	T-409	H-D Bulb Auger	—	—
	92510	T-411	Double Cutter, 2"	92815	92905
	92515	T-412	Double Cutter, 2 1/2"	92820	92905
	92520	T-413	Double Cutter, 3"	92825	92910
	92525	T-414	Double Cutter, 4"	92830	92910
	92530	T-416	Double Cutter, 6"	92855	92910
	92535	T-432	3-Blade Cutter, 2"	92860	92895
	92540	T-433	3-Blade Cutter, 3"	92865	92895
	92545	T-434	3-Blade Cutter, 4"	92870	92895
	92550	T-436	3-Blade Cutter, 6"	92875	92895

Optional Accessories

- Cat. #95812 Autofeed — K-6200
- Cat. #49032 Front Guide Hose Assembly
- Cat. #95797 Lifting Hook — K-6200
- Cat. #95792 Swivel Loading Wheel Assembly
- Cat. #95802 K-6200 Drum Assy. w/5/8" Pigtail
- Cat. #95807 K-3800 Drum Assy. w/6200 Adapters
- Cat. #95822 K-3800 to K-6200 Adapter Kit Only
- Cat. #59982 Cable Rust Inhibitor 1 QT.
- Cat. #95587 Cable Rust Inhibitor 1 Gal.

Cables and Flexible Leaders

	Catalog No.	Model No.	Description
	92460	C-25	25' I.C. Cable (7,6m)
	92465	C-26	50' I.C. Cable (15,2m)
	92470	C-27	75' I.C. Cable (22,9m)
	43647	C-24	100' I.C. Cable (30,5m)
	32737	C-27HC	75' Hollow-Core (22,9m)
	58192	C-24HC	100' Hollow-Core (30,5m)
	95762	C-25 IW	25' I.W. Cable (7,6m)
	95757	C-26 IW	50' I.W. Cable (15,2m)
	95752	C-27 IW	75' I.W. Cable (22,9m)
	95747	C-24 IW	100' I.W. Cable (30,5m)
	92555	T-458	5/8" x 2' Leader
	44122	—	5/8" Pigtail
	91047	—	5/8" Cable Repair Coupling (Fits over end of cable)



Standard Equipment Included In All Machine Options



Machine In Reclined Position

Distributor