

APM

MAX-M23

Before installation, read the Safety Warnings overleaf.



CAUTION: Risk of Danger

Read complete instructions prior to installation and operation of the unit



CAUTION: Risk of electric shock



Intended Use: The APM has been specifically designed for engineers requiring an effective way to monitor and display data. The APM accepts a range of electrical inputs (depending on the model) and displays the data on its integrated multi-format display. The APM has been designed for installation into electrical cabinets or display panels. The units come as standard with two digital outputs and one serial output.

Operating Specification

The digital readout will still show the actual voltage even if the bar graph is out of range.

Measurement Range

Voltage / Frequency	0–10V DC
Shunt	0–500mV DC
Current Input	0–80mA
Frequency (min. voltage 0.5V AC)	0–400Hz
DC Power Measurement	Watts

Measurement Accuracy

DC	0.5%
Frequency	0.1%
Power Measurement	0.5%
Isolation	Reinforced 4KV @ 1 Sec 3KV @ 1 min
Measurement Category	CATII

Impedance

Voltage / Frequency	2 MΩ
Frequency Shunt	10 MΩ
Current Input	15Ω


Communication

Modbus Configured Parameters (Trumeter configurator required): Only function code 4 – read input register supported.


Parameter RTU		
Slave ID		0 to 255
Baud Rate		4800 to 192000
Stop Bits and Parity		2 stop bits no parity 1 stop bit even parity 1 stop bit odd parity
Communications		Enable / Disable
Modbus Registers		
Address	Variable Type	Description
1-2	32bit Float	Displayed Value (after configuration)
3-4	32bit Float	SI measured unit (before configuration)
5	1 Byte	Alarm 1
6	1 Byte	Alarm 2
TCP/IP Parameters		
IP Address		Only adjustable if DHCP disabled
Subnet Mask		
Gateway, DNS1, DNS2, Hostname, Interface Name, Modbus Port Address, Modbus Timeout Period.		

Wiring Diagrams

DC VOLTAGE MEASUREMENT | AC FREQUENCY MEASUREMENT

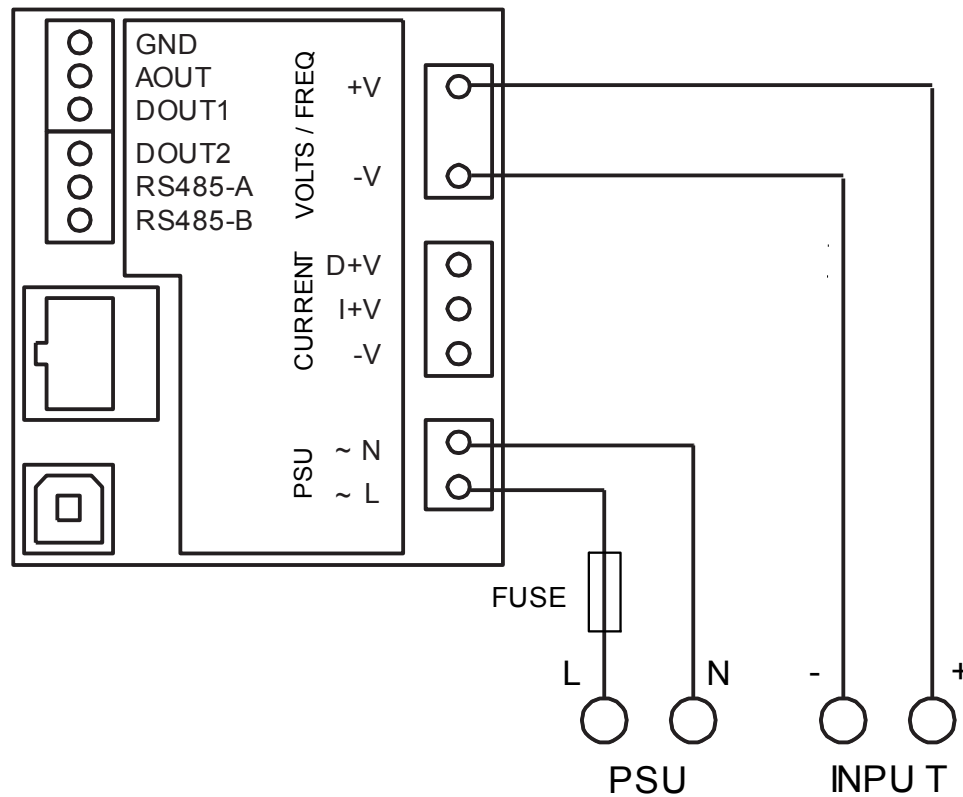


DC CURRENT MEASUREMENT USING SHUNT (500mV MAX)

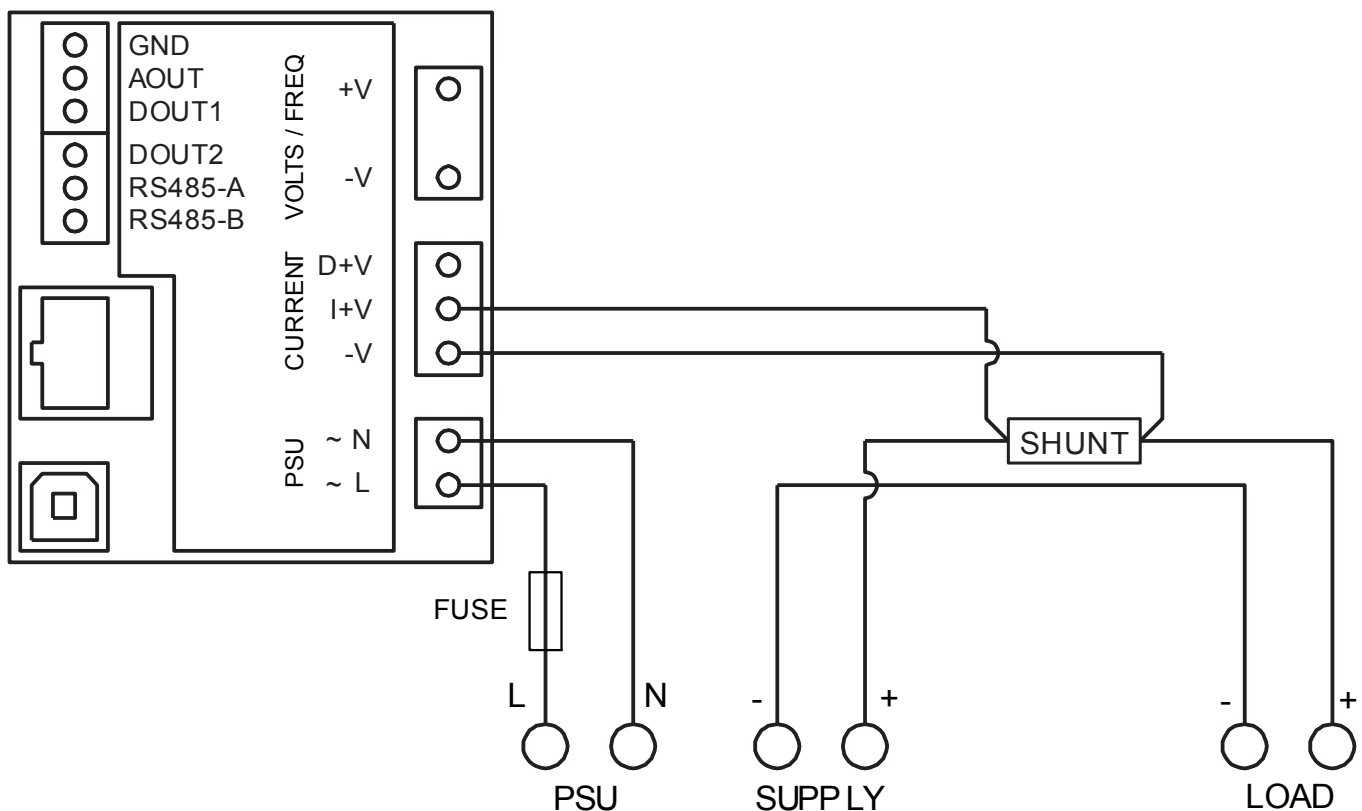


Wiring Diagrams

RELAY OUTPUT (ACTIVATED BY DOUT1)

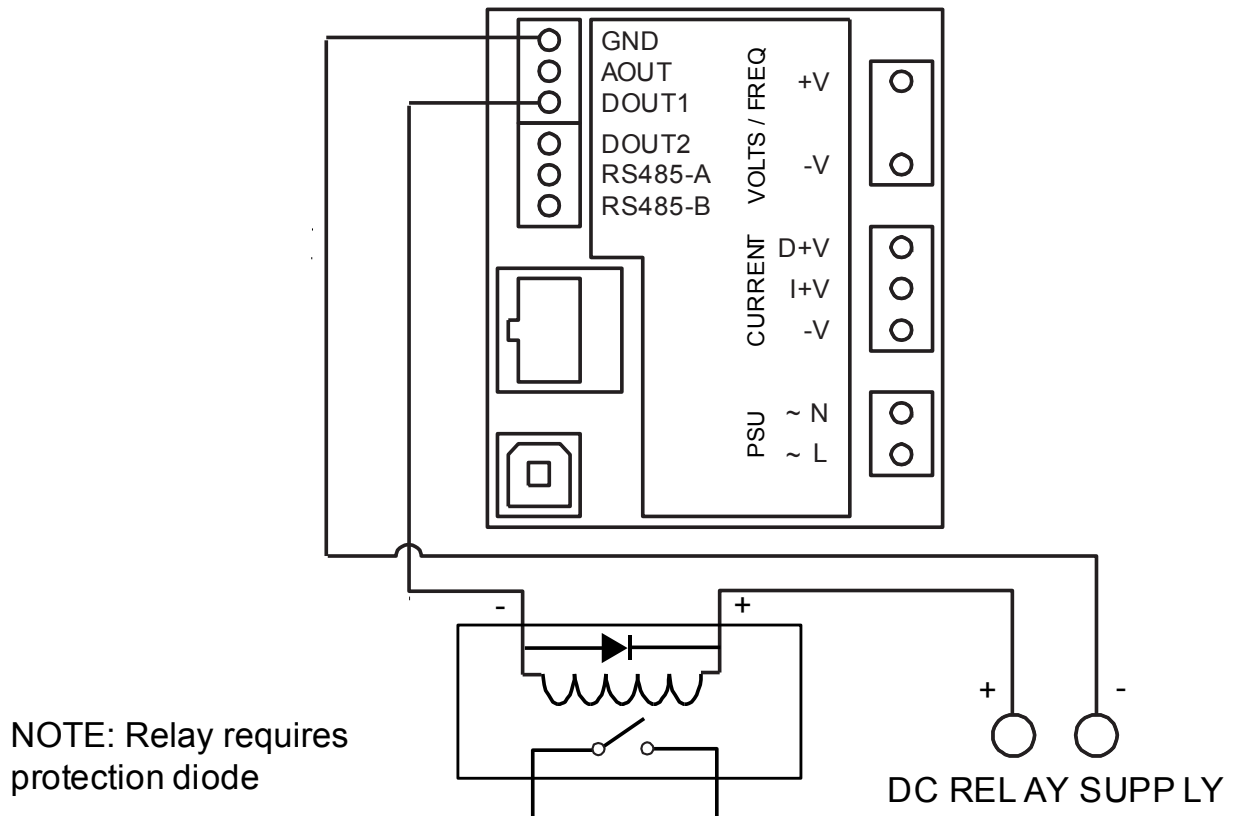

4-20mA ANALOG OUTPUT

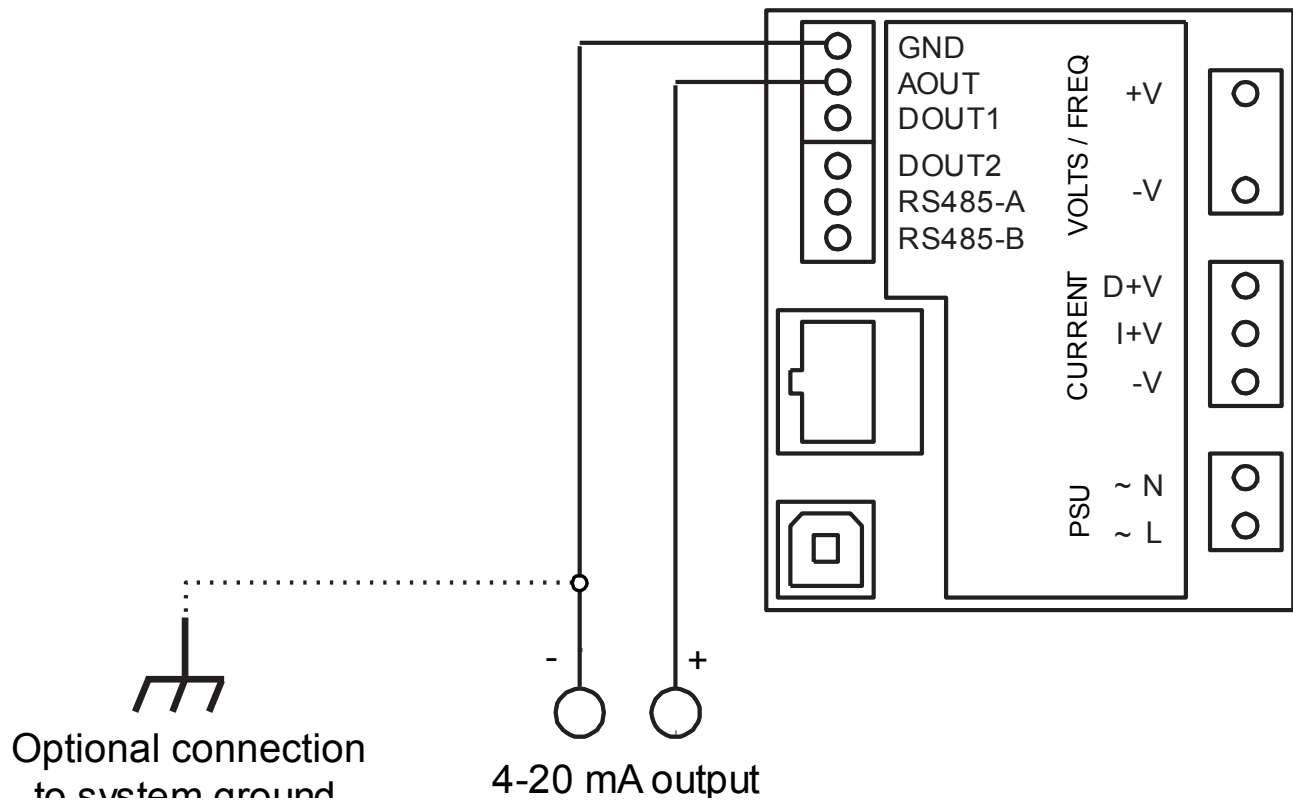

Safety Warnings



WARNING: INSTALLATION AND MAINTENANCE MUST BE CARRIED OUT BY SUITABLY QUALIFIED AND COMPETENT PERSONEL ONLY. HAZARDOUS VOLTAGES MAY BE PRESENT ON THE CONNECTION TERMINALS.



INSTALLATION

- Install this product in accordance with local regulations, codes and instructions.
- An external fuse must be fitted in-line with the PSU. Recommended fuse: 0.5A Type F with a breaking capacity of 35A or greater. Fuse voltage rating must be greater than the maximum supply voltage.
- All conductors carrying hazardous voltage must have external switching or disconnect mechanisms fitted that provide at least 3mm of contact separation in all poles. The switch must be suitably located; easily reached and marked as the disconnecting device.
- Signal cables connected to this device must not exceed 30 metres long.
- If signal cables are routed outside the building, install extra surge-protection devices.
- Current measurement input, USB and all outputs: Observe maximum allowable voltages. All circuits connected to these connectors must be limited-energy and insulated by double/reinforced insulation from mains voltages according to IEC 61010-1:2010



Failure to install or operate the unit in accordance with the above requirements may impair the electrical safety of the unit. Voltage measurements: An external UL recognized or listed overcurrent protection device (fuse or circuit breaker) must be fitted in-line with the voltage lead. Recommended fuse: 0.5A Type F with a breaking capacity of 35A or greater. Fuse voltage rating must be greater than the maximum voltage that will be applied to the meter.



MAINTENANCE

- Before cleaning, inspection or maintenance, isolate all power sources to the unit.
- There are no user-serviceable parts inside this unit. Never open the case.
- Inspect all external wiring connections at regular intervals. Replace any damaged wiring and tighten any loose connections.
- To clean the unit, use a dry cloth to wipe the casing.
- Take great care connecting the supply. If you connect power to the wrong terminals, it may destroy the unit.


Specification

<u>Environment</u>	<u>VALUE</u>
Temperature - operating	-10 to +60 deg C
Temperature - storage	-40 to +70 deg C
Altitude	2000 metres
Relative Humidity (non-condensing) - Continuous	0 – 85 %
Relative Humidity (non-condensing) - Intermittent	0 – 95 %
Overvoltage category (IEC664)	II
Pollution Degree (IEC664)	2
IP rating (from the front)	IP65
Power Supply	
<u>Voltage</u>	100-240V AC 50-60Hz
Max Power t	5W
Isolation	4.2KVrms, 5mA 1 min
<u>Display</u>	
Number of digits - Starburst	4
Number of digits – 7 Segment	4
Number of bar-graph segments	60
<u>Backlight colours</u>	RGBW
LCD	Positive or negative
Viewing angle	+/-70° Horizontal +/-70° Vertical
<u>Open Collector Sinking Outputs</u>	
Max voltage (open collector outputs)	34 VDC
Max current (open collector outputs)	500 mA
<u>4-20 mA Analogue Output</u>	
Accuracy	0.50 %
Max Load	240 Ω
Resolution	0.02 mA
<u>0-10V Analogue Output</u>	
Accuracy	0.50 %
Resolution	00.013V .50 %
<u>Connections</u>	
Type	Screw Terminals
Wire type	Solid or Stranded
Min. cable temperature rating	70°C (158°F)
Wire strip length	6.5mm to 7mm (0.26" to 0.28")
Wire gauge	0.8mm ² - 3.3mm ² (18AWG to 12AWG)
Torque	0.5-0.6Nm (4.42-5.31 lbf-in)
<u>In the Box</u>	
APM	
Getting started & safety guide	
IP65 Gasket	
Mounting Kit	
<u>Dimensions & Weight:</u>	
Panel Cut-out: 68 x 68 mm (2.68 in) square; 106mm (4.00 in) round +0.7 -0 mm (0.02 in). Max. panel thickness: 11.0 mm.	
Depth behind panel inside front: 55mm (2.17in) incl. external connections. Weight: 340 grams.	

Size

Size of the cutout in the panel:

Square: 68 x 68mm (2.68in) **Round:** 96.2 mm (3.79in) [+0.7 -0mm]

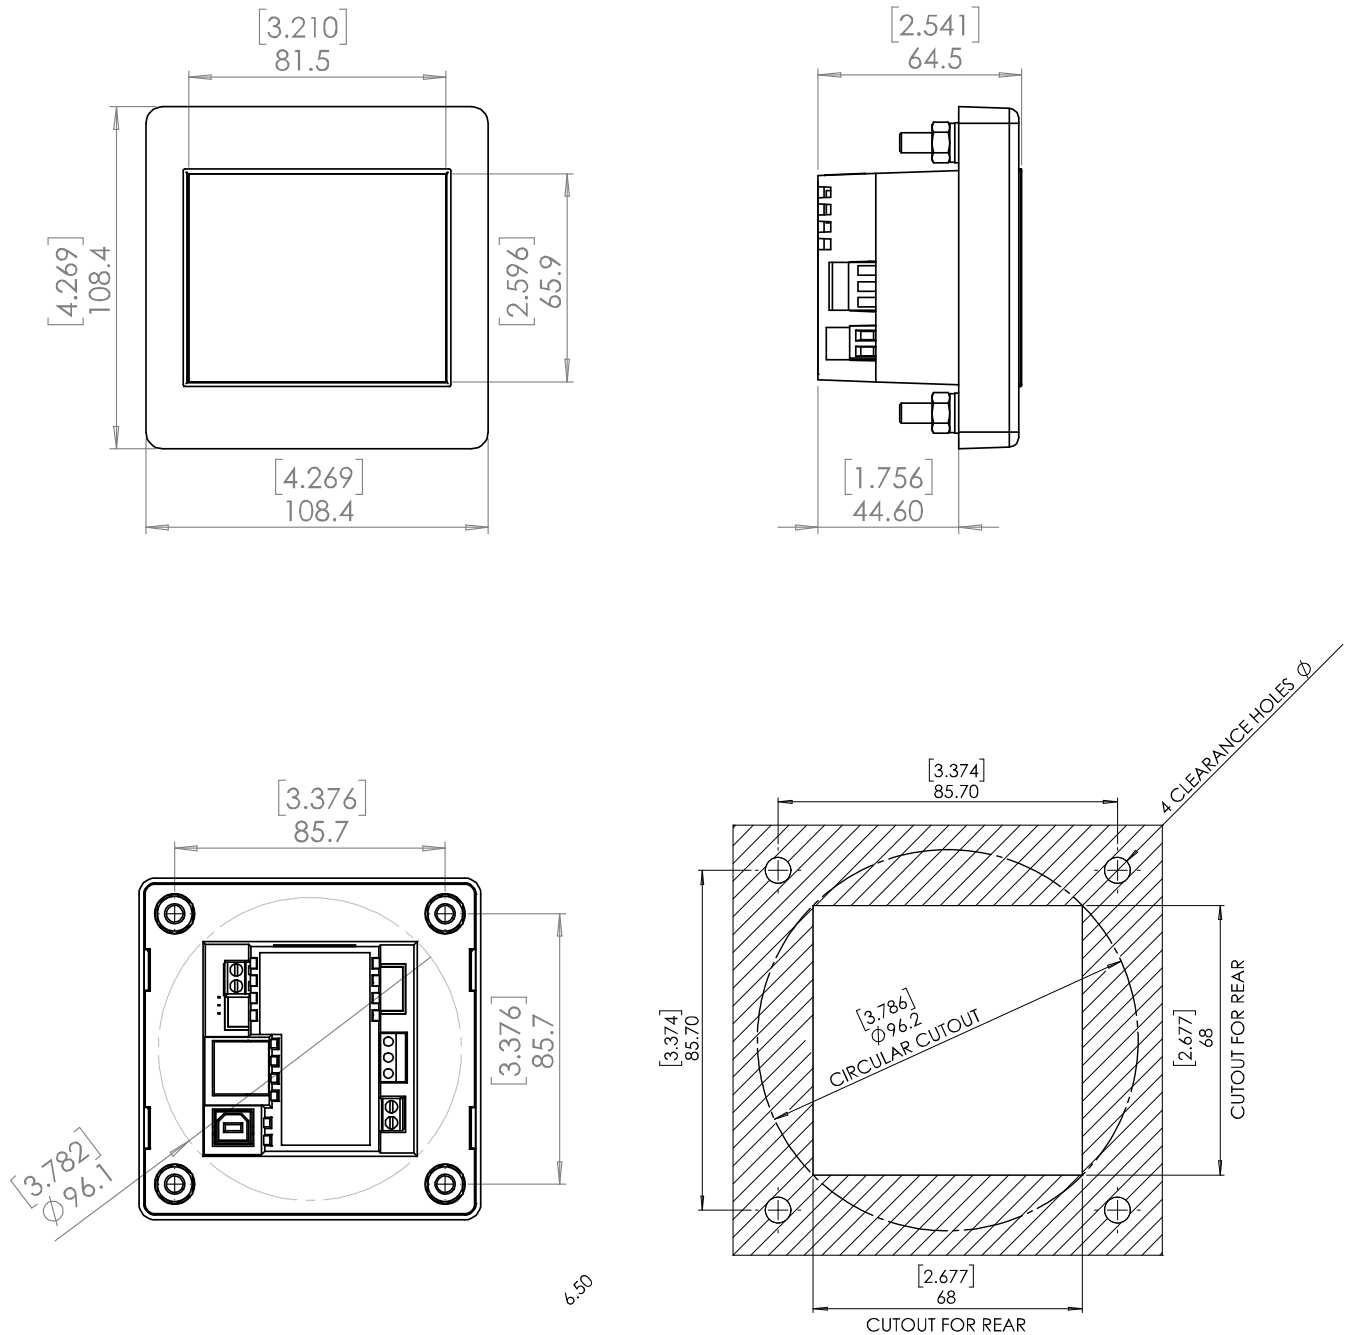

Software

You need the software to configure the setpoints and outputs.