



FIBER TOOLS

OPTICAL FIBER PROTECTION BOX DROP FIBER ENCLOSURE KIT

The Drop Fiber Enclosure Kit can be used as a demarcation point to install fiber optic cable splices and as a repair product to reconnect damaged or severed drop fiber cables. Common fiber sizes of 8.1mm, 5.4mm and 5.1mm rectangular cables and 3.0mm and 5.1mm round cables are accommodated with the supplied sealing gaskets. The integrated SC/APC bulkheads provide convenient connectivity for SC/APC connectors within the GR771 Telcordia compliant and IP68 rated enclosure. The enclosure can be permanently buried or mounted on the side of a building. Two DFE enclosures are typically used to repair a drop fiber as there is not enough slack cable to reconnect the fibers.

FEATURES:


- IP68 rated for buried applications and element protection
- Integrated SC/APC bulkheads (2)
- Re-enterable for rework needs
- Individual gaskets for 8.1mm, 5.4mm rectangular and 3.0mm, 5.1mm round cable
- Fast assembly with common tools
- Telcordia GR771 compliant

INDIVIDUAL GASKET FOR EACH CABLE SIZE:

8.1mm Rectangular 5.4mm & 5.1mm Rectangular 5.1mm Round 3.0mm Round Solid Gasket



Captive Screws on Cover

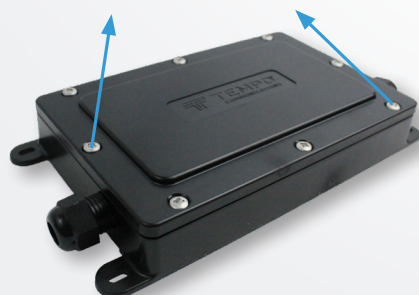

Dual SC/APC bulkheads


DFE101-BH




DFE101-BH-GY




DFE104-BH

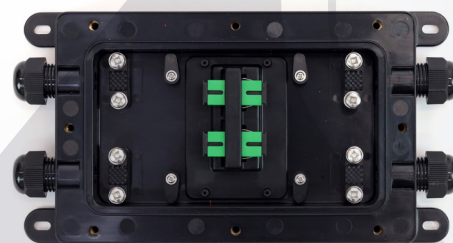

Cable Clamp



Captive Screws on Cable Clamps



Revised Vision. Innovative Forward.

Find Quality Products Online at:

www.GlobalTestSupply.com

sales@GlobalTestSupply.com

COMPONENT PARTS:


PART	DESCRIPTION	PRODUCT	QUANTITY (TWO PORT)	QUANTITY (FOUR PORT)
Case Top	Polycarbonate, Black		1	1
Case Bottom	Polycarbonate, Black		1	1
Rubber Gasket	8.1mm Rectangular		2	4
Rubber Gasket	5.1mm/5.4mm Rectangular		2	4
Rubber Gasket	5.1mm Round		2	4
Rubber Gasket	3.0mm Round		2	4
Rubber Gasket	No Hole		0	2
3mm Cable Clamp	3.0mm		2	4

SPECIFICATIONS:

IP Rating	IP68*
Compliance	Telcordia GR771*
Size	8.85 x 4.72 x 1.34" (225 x 120 x 34mm)
Weight	0.66lb (0.3kg) 0.8lb (0.36kg) [for the DFE104]
Cable Sizes	8.1mm rectangular, 5.4mm & 5.1mm rectangular and 3.0mm and 5.1mm round
SC/APC Bulkheads	Two
Color	Black
Material	Polycarbonate (UV resistant)
Operating Temperature	-40 to +80C
Storage Temperature	-40 to +80C

*Tempo Communications IP68 test results
IP6x - Tested against dust ingress, no ingress occurred
IPx8 - Tested against water ingress at 2m for 30 minutes, no ingress occurred
Tested per IEC 60529

EXAMPLE OF FIBER ROUTING WITH CONNECTORS

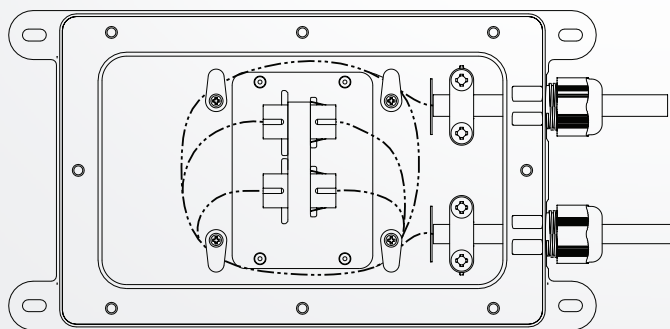

ORDERING INFORMATION:

CAT. NO.	DESCRIPTION
DFE101-BH	DROP FIBER ENCLOSURE KIT, TWO PORT STUB WITH TWO SC/APC BULKHEADS
DFE104-BH	DROP FIBER ENCLOSURE KIT, FOUR PORT WITH TWO SC/APC BULKHEADS
DFE101-BH-GY	DROP FIBER ENCLOSURE KIT, 2 PORT STUB, WITH BH, GRAY

