

Truflo® — FES Series


Plastic Flow Switch

ICON™ Corrosion-Free
PROCESS CONTROLS Instrumentation Equipment


- ✓ Excellent Pump Protection
- ✓ Hirschmann DIN Connection | Wire at Sensor
- ✓ Low Flow Switch Points

- ✓ Corrosion Resistant PP Body | Paddle
- ✓ ½ - 12" Pipe Sizes
- ✓ IP65 | NEMA 4X Enclosure
- ✓ Simple Installation Process
- ✓ Easily Changed from NO to NC

truflo®

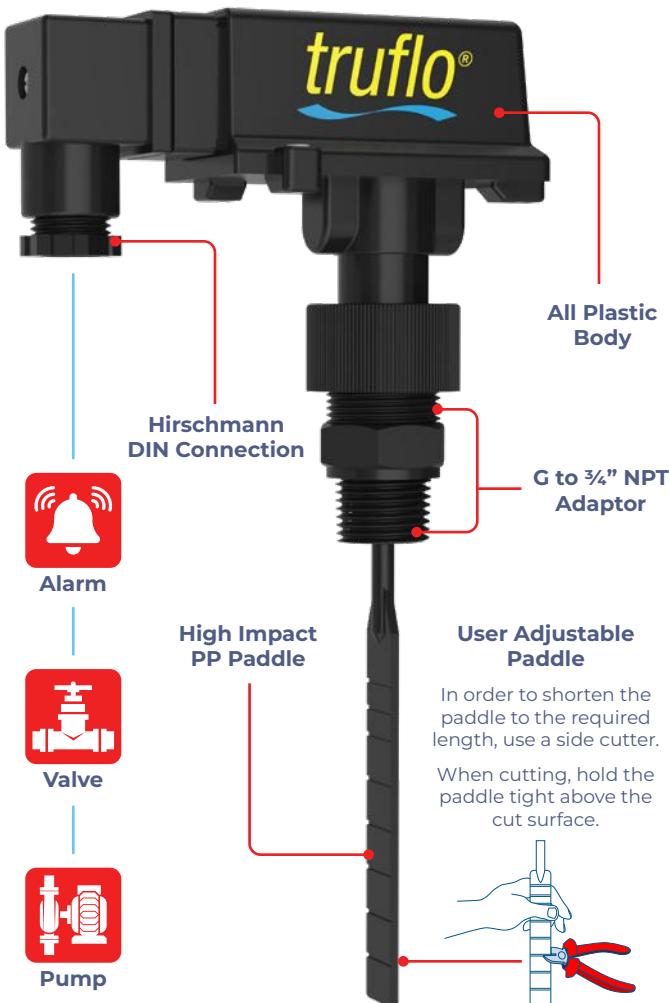


Simple Relay Switch | NO | NC

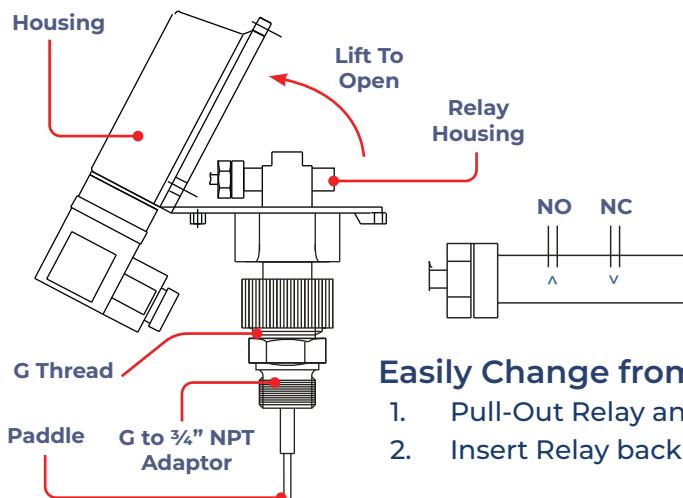

Easily Change from NO to NC

1. Pull-Out Relay and Rotate 180°
2. Insert Relay back into Position

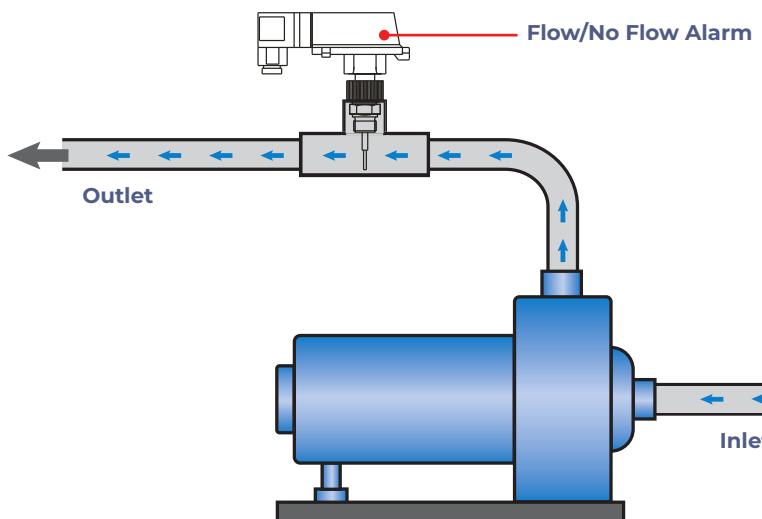

Truflo® — FES Series

Plastic Flow Switch


ICON™ Corrosion-Free
PROCESS CONTROLS Instrumentation Equipment

Specifications


truflo®

Body Material	PP
O-Ring	Viton
Max. Working Temperature	190°F 88°C
Max. Working Pressure Non-Shock	145 psi 10 bar
Max. Contact Current	1.5A
Max. Power Supply	85 VDC 250 VAC
Relay	SPST Reed Switch NO NC Adjustable
Protection Class	IP65 NEMA 4X

Electrical Connections

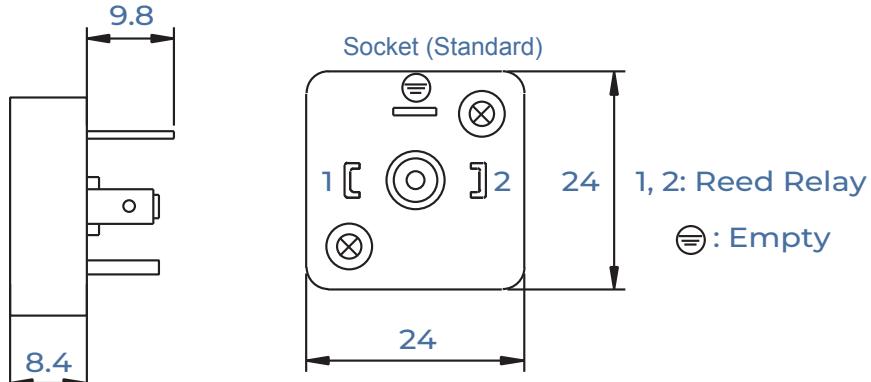

Dimensions

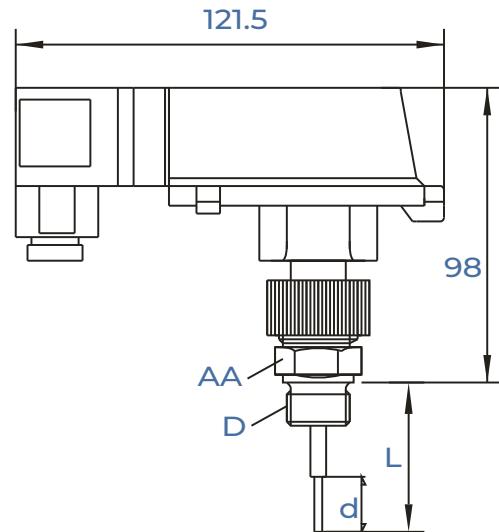

Model Selection

Model	Pipe Size	Connection Size D	Max. Flow m ³ /h, Water	Rising Flow Rate L/min, Water	Falling Flow Rate L/min, Water	AA1-AA (MM)	L (MM)	D (MM)
FES-005-2	1/2- 2"	1/2" NPT	20	1 2	0.9 1.9	27	52	20
FES-005-3	3"	1/2" NPT	30	3 6	2.9 5.5	27	60	30
FES-005-4	4"	1/2" NPT	40	4.8 8	4.6 7.5	27	70	40
FES-005-6	6"	1/2" NPT	110	8 11	7.8 10	27	80	50
FES-005-8	8"	1/2" NPT	120	18 24.2	17.5 24	27	90	60