



G448-0002

# ULTRA SLIMPAK® G448-0002

## Bridge Input Field Configurable Isolator

Provides an Isolated DC Output  
in Proportion to a Bridge/Strain Gauge Input



- Adjustable Excitation 1 to 10V with up to 120mA drive
- Field Configurable Inputs from 10mV to  $\pm 200$ mV (0.5mV/V to  $> 50$ mV/V)
- Field Configurable Outputs:  
0-5V, 0-10V, 0-1mA, 0-20mA and 4-20mA

- Ultra Slim Housing for High Density Installations
- Flexible Power Supply Accepts 9 to 30 VDC
- ASiC Technology for Enhanced Reliability
- RoHS Compliant

### Description

The G448 is a DIN rail mount, bridge or strain gauge input signal conditioner with 1800VDC isolation between input, output and power. The field configurable input and output offer flexible, wide ranging capability for bridge or strain gauge input applications from 0.5mV/V to over 50mV/V.

Wide ranging, precision zero and span pots allow 50% adjustability of offset and gain within each of the 11 switch selectable input ranges. The output can be set for either 0-5V, 0-10V, 0-1mA, 0-20mA or 4-20mA.

### Application

Three way isolation in the G448 completely eliminates ground loops from any source. Isolation protects expensive SCADA systems from ground faults and provides filtering for noise reduction which can be a significant problem with small, millivolt, bridge signals. Wide ranging flexibility allows the user to easily zero out dead-loads in weighing systems or configure bipolar input ranges for expansion-compression or vacuum-pressure bridge applications.

### Diagnostic LED

The G448 is equipped with a dual function LED signal monitor. The green, front mounted LED indicates both DC power and input signal status. Active DC power is indicated by an illuminated LED. If the input signal is more than 110% of the full scale range, the LED will flash at 8Hz. Below -10%, the flash rate is 4Hz.

### Configuration

The G448 has 11 input range switch settings. Trim potentiometers allow 50% input zero and span adjustability within each of the 11 full-scale, input ranges.

For example, the 200mV switch setting in Table 1 configures the input for a 0 to 200mV range. Since the span can be contracted by 50%, this enables an input span as narrow as 100mV of the range, or 50%. This span can be positioned anywhere within the 0-200mV range with a zero off-set as large as 50% of the full scale range (e.g. 100 to 200mV input).

Unless otherwise specified, the factory presets the Model G448 as follows:

Input Setting: 0 to 50mV  
Input Range: 0 to 30mV (3mV/V)  
Excitation: 10V  
Operation: Direct  
Output: 4 to 20mA

The DC power input accepts any DC source between 18 and 30V, typically a 24VDC source is used (see Accessories).

For other I/O ranges refer to Tables 1 through 4 and reconfigure switches SW1 and SW2 for the desired input range, function, excitation and output range.

**WARNING:** Do not change switch settings with power applied. Severe damage will result!

**Eurotherm.**

## Calibration

1. After configuring the DIP switches, connect the input to a calibrated millivolt source. Connect the output to the device (or a load equivalent to the device) and apply power. (see Wiring Diagram, Figure 2 or 3).

**Note:** To maximize thermal stability, final calibration should be performed in the operating installation, allowing approximately 1 to 2 hours for warm up and thermal equilibrium of the system.

2. Set the calibrator to the desired minimum and adjust the zero potentiometer for the desired minimum output.

3. Set the calibrator to the desired maximum and adjust the span potentiometer for the desired maximum output.

4. Repeat steps 2 and 3, if necessary for best accuracy.

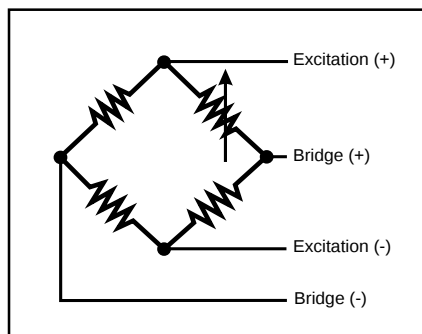


Table 1: G448 Input Ranges

| Input Range   | Selector SW1 |   |   |   |   |
|---------------|--------------|---|---|---|---|
|               | 1            | 2 | 3 | 4 | 5 |
| 0 to 10mV     |              | ■ |   | ■ | ■ |
| 0 to 20mV     |              | ■ | ■ |   | ■ |
| 0 to 50mV     |              | ■ | ■ | ■ | ■ |
| 0 to 100mV    | ■            |   |   |   | ■ |
| 0 to 200mV    | ■            |   |   | ■ | ■ |
| -5 to 5mV     |              | ■ |   |   |   |
| -10 to 10mV   |              | ■ |   | ■ |   |
| -20 to 20mV   |              | ■ | ■ |   |   |
| -50 to 50mV   |              | ■ | ■ | ■ |   |
| -100 to 100mV | ■            |   |   |   |   |
| -200 to 200mV | ■            |   |   | ■ |   |

Key: ■ = 1 = ON or Closed

Table 2: G448 Direct or Reverse Operation

| Operation | SW1 |
|-----------|-----|
| Direct    | 6   |
| Reverse   | ■   |

Key: ■ = 1 = ON or Closed

Table 3: G448 Bridge Excitation Settings

| Bridge Excitation | SW1 |   |
|-------------------|-----|---|
|                   | 7   | 8 |
| 9.8 to 10.1V      | ■   |   |
| 4.8 to 5.2V       |     |   |
| 0 to 10V          | ■   | ■ |
| 0 to 2.5V         |     | ■ |

Key: ■ = 1 = ON or Closed

Table 4: G448 Output Settings

| Output    | SW2 |   |   |   |   |   |   |   |
|-----------|-----|---|---|---|---|---|---|---|
|           | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 0 to +5V  | ■   | ■ | ■ | ■ |   |   |   |   |
| 0 to +10V | ■   |   | ■ | ■ |   |   |   |   |
| 0 to 1mA  |     | ■ | ■ | ■ |   |   |   |   |
| 4 to 20mA |     |   |   |   |   | ■ | ■ | ■ |
| 0 to 20mA | ■   | ■ |   |   | ■ |   | ■ | ■ |

Key: ■ = 1 = ON or Closed

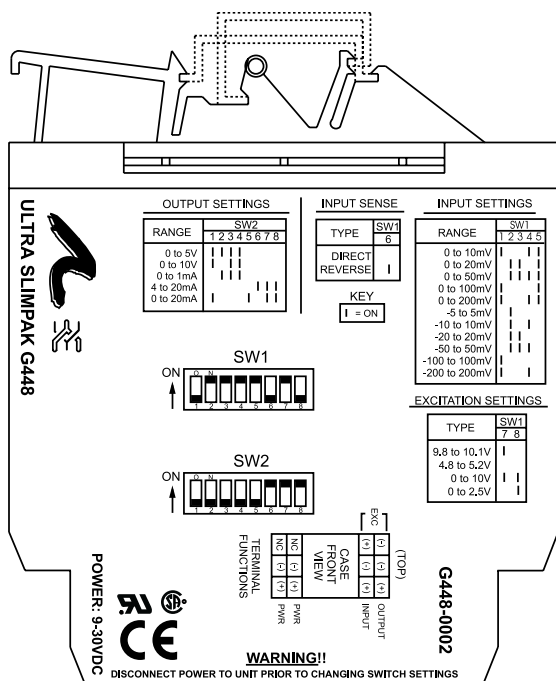


Figure 1: G448 Factory Cal: 0 to 30mV (0 -50mV Switch Settings) 10V Excitation, Direct Operation, 4-20mA Output

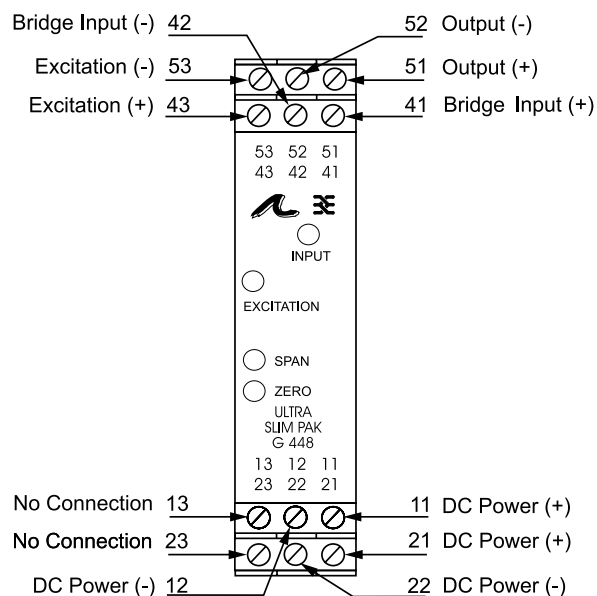


Figure 2: Wiring Diagram for G448-0001/0002 (-0001 for reference only, not an active product)


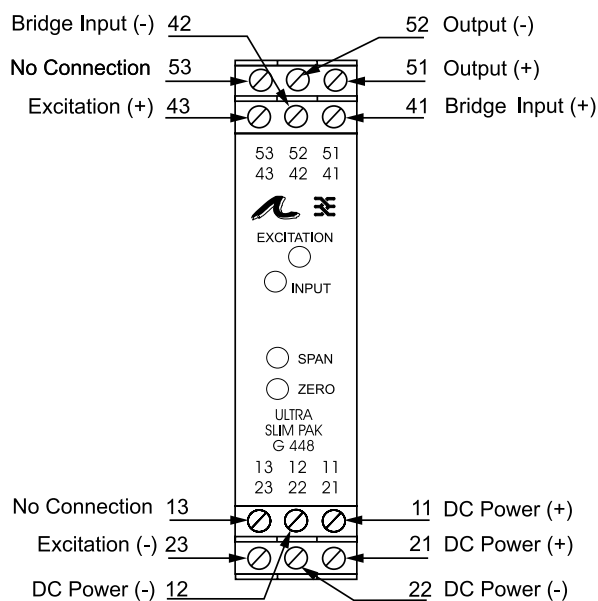


Figure 3: Wiring Diagram for G448-0000 (for reference only, not an active product)

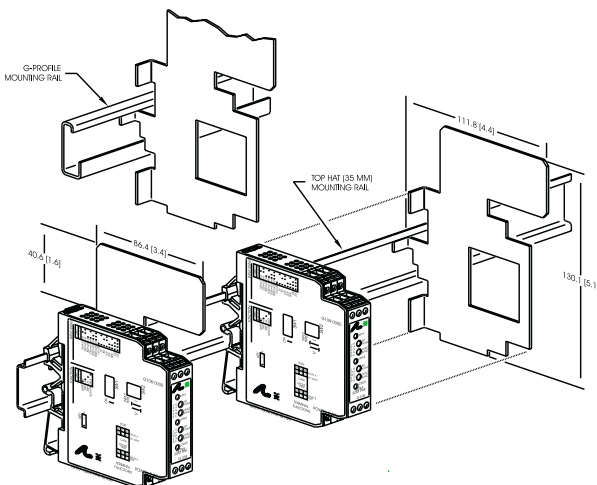

Note: All Ultra SlimPak modules are designed to operate in ambient temperatures from 0 to 55°C when mounted on a horizontal DIN rail. If five or more modules are mounted on a vertical rail, circulating air or model HS01 Heat Sink is recommended. Refer to HS01 Technical Bulletin (#721-0549-00) or contact the factory for assistance.

Figure 4: Mounting Multiple Modules

## Specifications

### Input:

#### Voltage:

Full Scale Range: 10mV to  $\pm 200$ mV (Table 1).

Impedance:  $>1$ M Ohms

#### Overvoltage:

intermittent 400V, max.;  
continuous 264V, max.

Common Mode (Input to Ground):

1800VDC, max.

#### Zero Turn-Up:

50% of full scale range

#### Span Turn-Down:

50% of full scale range

#### Operation:

direct or reverse acting

### Output:

#### Voltage:

Output: 0-5V, 0-10V

Impedance:  $<10$  Ohms

Drive: 10mA, max. (1K Ohms, min. @ 10V)

#### Current:

Output: 0-1mA, 0-20mA, 4-20mA

Impedance:  $>100$ K Ohms

#### Compliance:

0-1mA; 7.5V, max. (7.5K Ohms, max.)

0-20mA; 12V, max. (600 Ohms, max.)

4-20mA; 12V, max. (600 Ohms, max.)

### Bridge Excitation:

1 to 10VDC, 120mA max.

### Accuracy (Including Linearity, Hysteresis):

$\pm 0.1\%$  typical,  $\pm 0.2\%$  maximum of selected  
input range at 25°C.

#### Stability:

$\pm 0.025\%/^{\circ}\text{C}$  typical,  $0.05\%/^{\circ}\text{C}$  maximum, of  
selected full scale input range.

### Output Noise (maximum):

0.1% of span, rms, or 10mV whichever is  
greater.

### Response Time (10 to 90%):

$<200$ mSec., typical.

### Common Mode Rejection:

DC to 60Hz:  $\geq 120$ dB,  $\geq 100$ dB for 0-1mA range

### Isolation:

1800VDC between input, output & power.

### EMC Compliance (CE Mark):

EMC: EN61326-1:2013

Safety: EN61010-2:2013

### LED Indication (green):

Input Range (approx.)

$>110\%$  input: 8Hz flash

$<0\%$  input: 4Hz flash

### Humidity (Non-Condensing):

Operating: 15 to 95% @ 45°C

Soak: 90% for 24 hours @ 65°C

### Temperature Range:

Operating: 0 to 55°C (32 to 131°F)

Storage: -25 to 70°C (-13 to 158°F)

### Power:

#### Consumption:

2.5W typical (one 350 Ohm bridge),

4W max. (four 350 Ohm bridges).

Range: 18 to 30VDC

### Weight:

0.54 lbs.

### Wire Terminations:

Screw terminals for 12-22 AWG

### Agency Approvals:

CSA certified per standard C22.2, No. 0-M91  
and 142-M1987 (File No. LR42272).

UL recognized per standard UL508

(File No.E99775).

CE Conformance per EMC directive 2004/

108/EC and Low Voltage directive 2006/

95/EC.

RoHS Compliant

## Ordering Information

### Models & Accessories

#### Specify:


1. Model: **G448-0002**
2. Accessories: (see Accessories)
3. Optional Custom Factory Calibration; specify **C620** with desired input and output ranges.

### Accessories

Slim Pak "G" series modules will mount on standard TS32 (model MD02) or TS35 (model MD03) DIN rail. In addition, the following accessories are available:

- HS01** Heat Sink
- MD03** TS35 x 7.5 DIN rail
- WV905** 24VDC Power Supply (0.5 Amp)
- H910** 24VDC Power Supply (1 Amp)
- H915** 24VDC Power Supply (2.3 Amp)
- MB03** End Bracket for MD03
- C664** I/O Descriptive Tags

## Dimensions

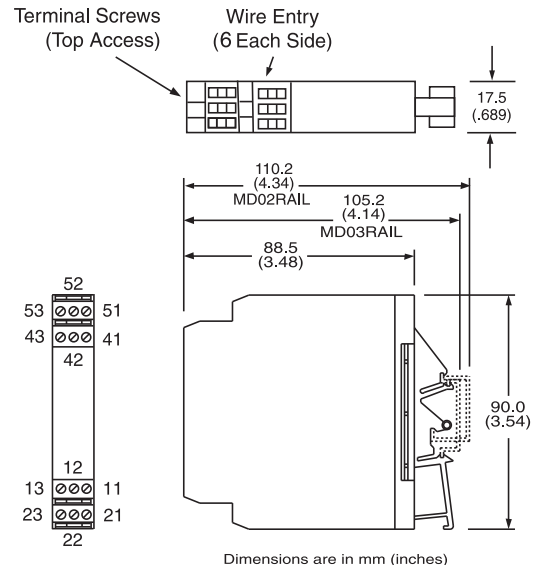

**Eurotherm**  
by **Schneider Electric**



Printed on recycled paper

721-0537-00-N 09/06 Copyright© Eurotherm, Inc 2006

• Action Instruments • Chessell • Eurotherm

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)