


## Gooseneck Hex Connecting Bar

Provides extra leverage when positioning steel beams and aligning bolt holes. The forged fit-up bar is pointed on one end while the 45° angle of the chisel-end both combine for greater leverage.

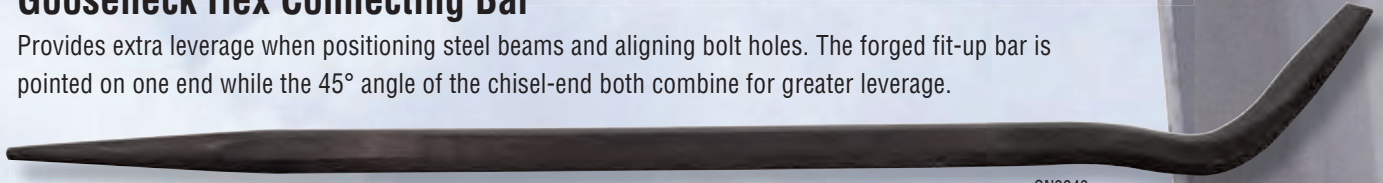


GN3243

Cat. No	UPC Code 0-92644+	Description	Overall Length
GN3243	66509-7	7/8" (22 mm) Gooseneck Hex Connecting Bar	30" (762 mm)

## Ironworker's Pliers

Use to twist and snip soft annealed rebar tire wire. The knurled jaws also aid in easy twisting and turning. These pliers feature a hook-bend in the handle for added grip and leverage. Unique handle tempering helps absorb the "snap" when cutting wire.

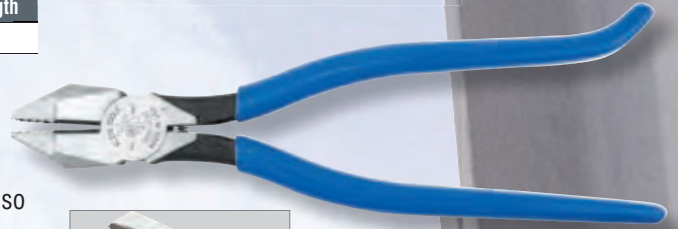

D201-7CST

- New knurled head for better gripping and longer lasting teeth pattern.

Cat. No.	UPC Code 0-92644+	Nose Type	Handle Finish	Jaw Length	Jaw Thickness	Jaw Width	Knife Length	Overall Length
201-7CST	70300-3	Square	Plain	1-9/32" (33 mm)	1/2" (13 mm)	1-5/32" (29 mm)	5/8" (16 mm)	9-1/8" (232 mm)
D201-7CST	70302-7		Plastic-Dipped					9-1/4" (235 mm)
D20007CST*	70378-2							

\*Cuts ACSR, screws, nails and most hardened wire.

## Tool Tether

Falling objects are the #3 leading cause of disabling workplace injuries, according to OSHA. Keep your tools close at hand when working at height with this handy tool tether.



TT1

Cat. No	UPC Code 0-92644+	Maximum Load Limit	Relaxed Length	Stretched Length
TT1	46000-5	10 lbs (4.5 kg)	32" (813 mm)	60" (1524 mm)

### ⚠️ WARNINGS:

- Inspect for wear before each use.
- Do not use for human support.
- Maximum Working Capacity 10 lbs. (4.5 kg). Never connect over 5 lbs. (2.3 kg) to a person.
- Do not use around moving or rotating equipment.

### ⚠️ WARNINGS:

- Tether extends to length of 5' (1.5 m). Rig to avoid contact with objects below.
- Always ensure cinch remains snug while in use.
- Always attach carabiner end to anchor point.
- Do not attach tether back onto itself.
- Do not tie knots in tether.

## Bull Pins with Tether Holes

Manufactured for durability, Klein bull pins are machined from quality alloy steel that is heat-treated for strength. The tether hole allows you to keep bull pins connected for easy access and safety when working at height.

- Standard design includes a vertical slot to protect the loop-end of the tether when connected.
- Broad-Head design will not mushroom.
- Rust resistant.



3255TT

3259TTS

Cat. No.	UPC Code 0-92644+	Material	Length	Point Diameter	Top Diameter
<b>Broad-Head</b>					
3255TT	48001-0	Steel	13-3/4" (349 mm)	5/16" (8 mm)	1-1/4" (32 mm)
3256TT	48002-7	Steel	10" (254 mm)	1/4" (6 mm)	1-1/16" (27 mm)
<b>Standard</b>					
3259TT	48003-4	Steel	12" (305 mm)	7/16" (11 mm)	1-5/16" (33 mm)
3259TTS	48004-1	Stainless Steel			