

# LeakPro® — LeakPoint®

## Leak Detection Controller | Alarm

**ICON**™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment

**LeakPro®**



### Features

- ✓ 7500' Cable Sensing Range
- ✓ Optional Audible + Visual Notification
- ✓ 3 Amp Relay Output
- ✓ Sensitivity Adjustment
- ✓ NEMA 4X Enclosure
- ✓ RS485 Modbus Communication

### Additional Properties


- ✓ Locates Leaks within ±3ft of Source
- ✓ Monitors up to 4 Separate LeakDtec® Cable Strings
- ✓ Remote Monitoring Capability
- ✓ Rapid Indication of Leak Location
- ✓ Audible Silence Button
- ✓ Quick Connect Cord Grips | No Internal Wiring Required

## Precise leak detection that finds the leak rather than just announcing it.

The LeakPoint® liquid alarm module has been designed to provide our customers with a product that offers accurate detection and identification of the location of where the leak has occurred. The sensitivity adjustment provides fine tuning of the signal coming from the sensor cable.

The LeakPoint® monitor offers dedicated RS485 communication output signals ensuring the sensing cable is always being monitored.

### Schematic Layout

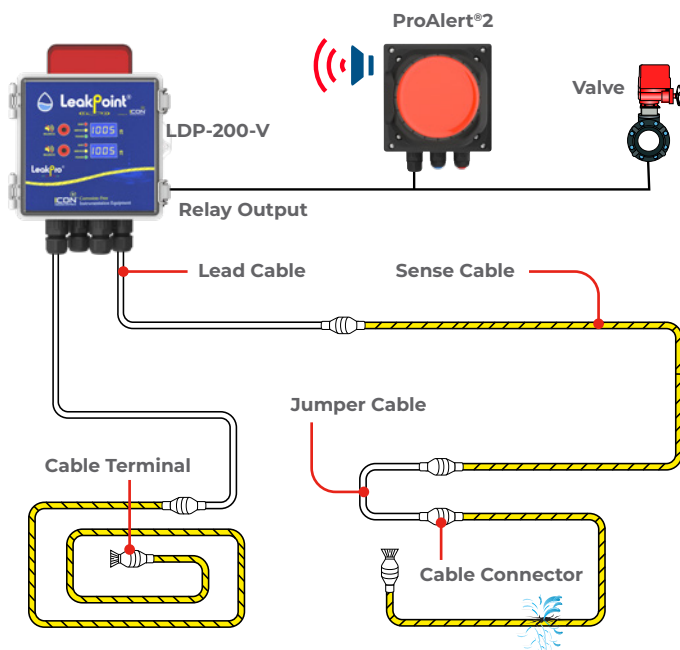

### Dual Containment Piping



Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)



# LeakPro® — LeakPoint®

## Leak Detection Controller | Alarm

ICON™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment

### Cable Accessories

LeakPro®

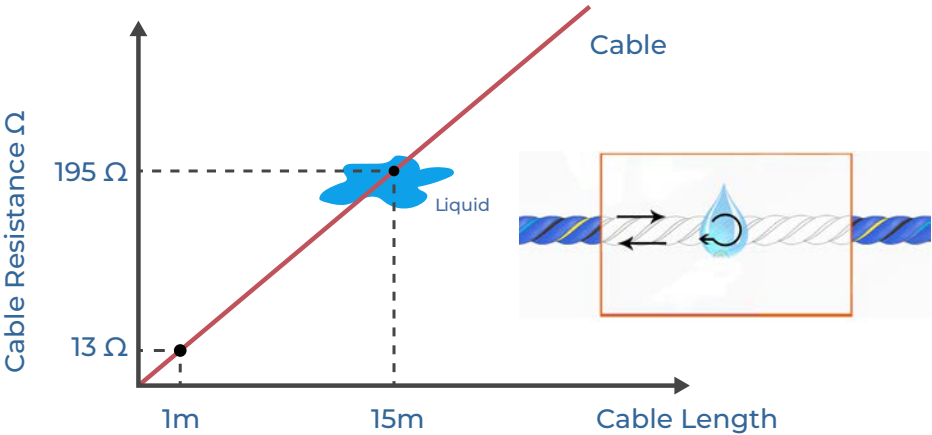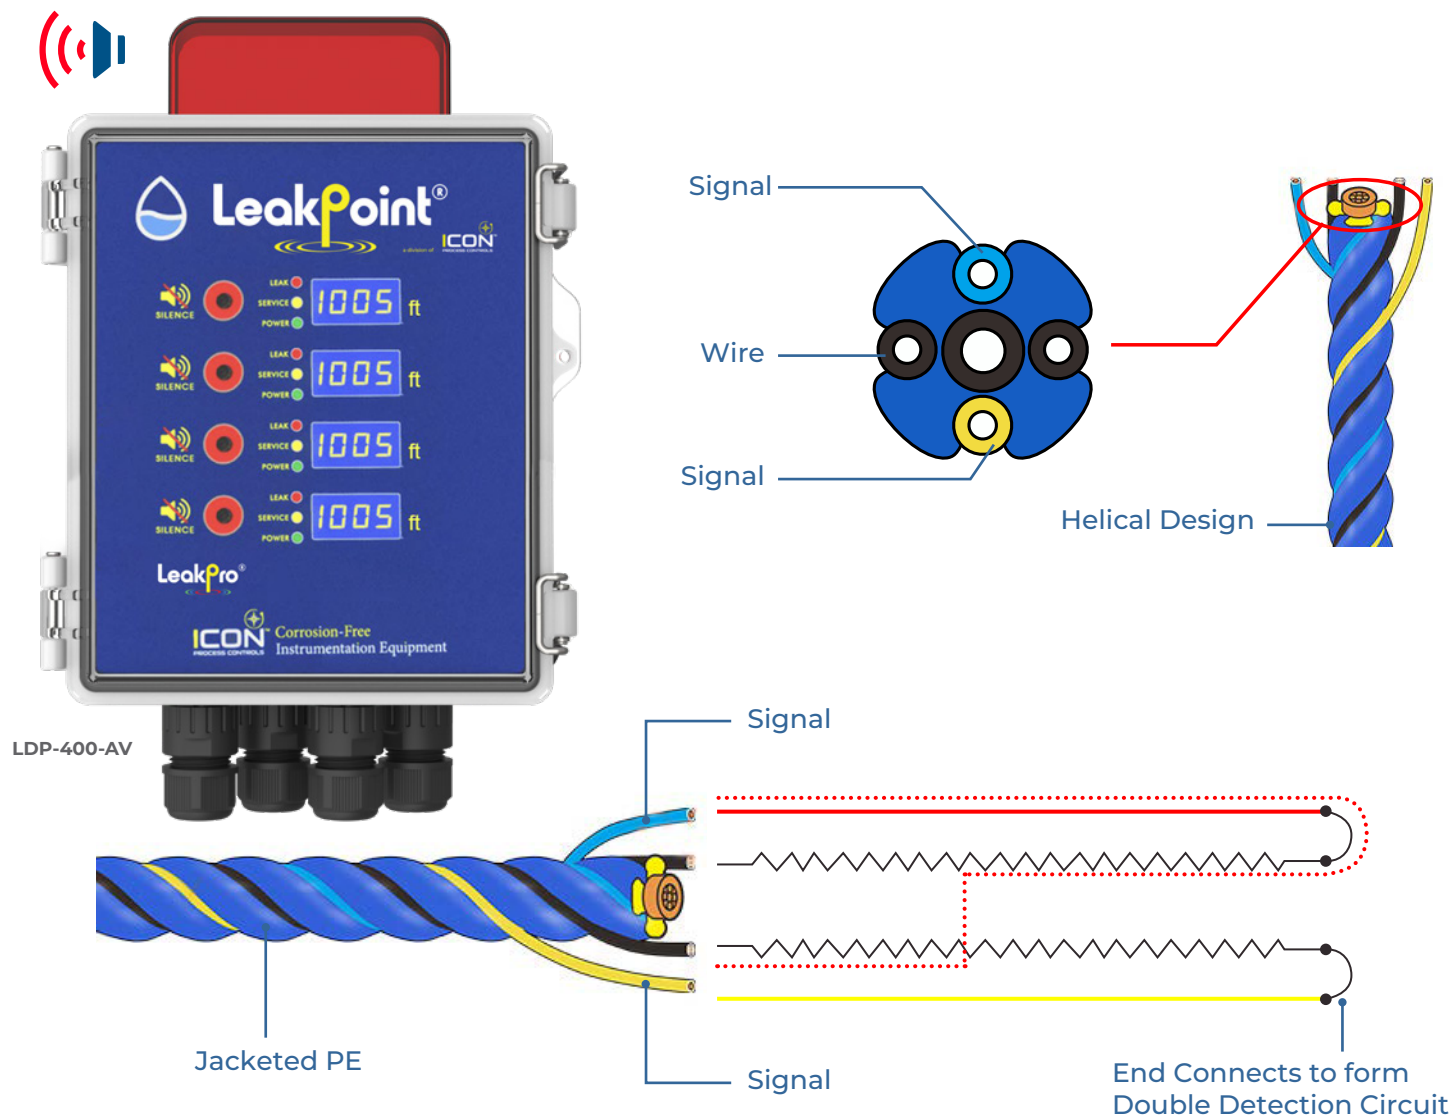

The electrical resistance of the cable is 13 ohms/m. If a leak occurs, the resistance loops back to the controller and the location is identified within  $\pm 3$  ft.


# LeakPro® — LeakPoint®

## Leak Detection Controller | Alarm


ICON™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment

### Cable Accessories

LeakPro®

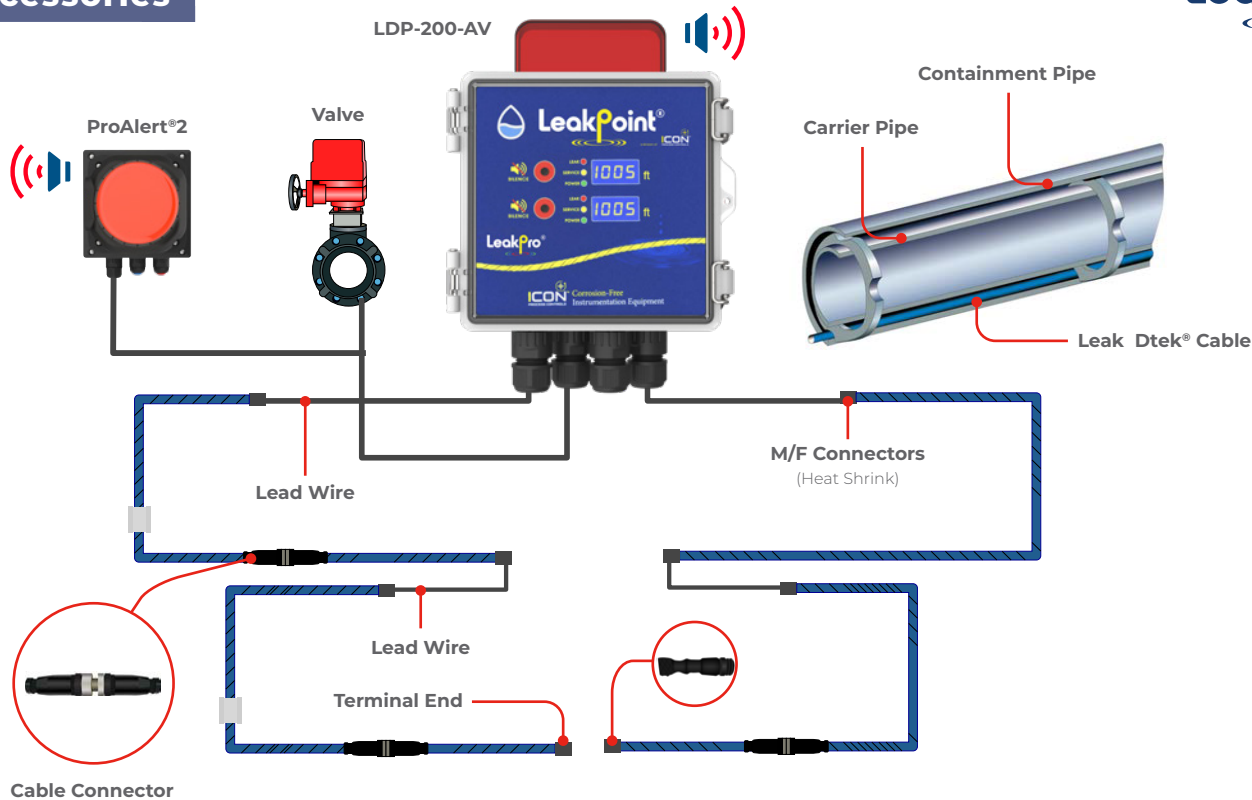

Heavy Duty Connections can be supplied as factory fitted or in-field installed without any special tools

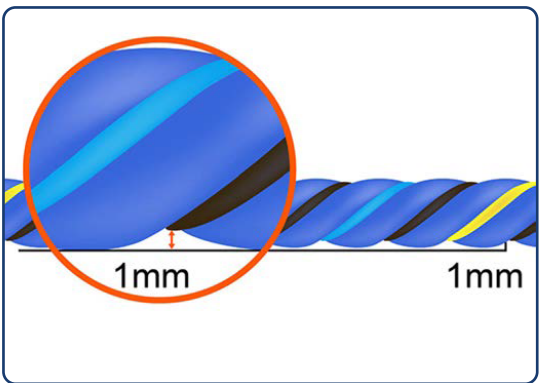

Eliminates spurious false alarms due to droplets caused by high humidity or condensation

### Model Selection

LeakPoint® — Leak Point Detection		
Part Number	Channel	Cable   Up to 7500'
LDP-100-V	Single Channel	1 x Input Cable
LDP-200-V	2 Channel	2 x Input Cables
LDP-300-V	3 Channel	3 x Input Cables
LDP-400-V	4 Channel	4 x Input Cables

Add Suffix: "V" for Visual Alarm (std)  
"A" for Audible Alarm  
"AV" for Audible + Visual Alarm

RoHS  
Compliant

CE