



Empowering you to work smarter

NH5SLL 

NH5LLB

NH5LLR

NH5LLY

Low Loss Refrigerant Hoses



Charging & Recovery

NH5SLL



F2010
A2L Adapter included
**A2L
Compatible**


NH5LLR



NH5LLY



NH5LLB

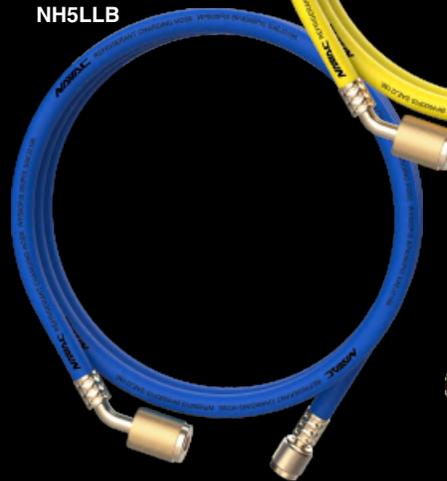

FHL1
Low Loss Fitting 45°


1/4" Low Loss Color Hoses, 5 Ft Long

High Strength

- Low loss connector to prevent refrigerant loss
- Suitable for R-410A, R-134a, R-22 and other refrigerants
- 1/4" SAE fittings with 45° bend on low loss end
- 4000 psi burst pressure
- 800 psi working pressure

Improved Design

- Built-in roller bearing for easy connection & longer service life
- Universal, replaceable gasket
- NH5SLL kit Includes F2010 adapter, A2L compatible



The valve core depressor can be adjusted up or down to optimize its access to valve core. Use a valve core depressor adjustor to turn the depressor. To lower, turn clockwise; to raise, turn counterclockwise.



Model	NH5SLL	NH5LLR	NH5LLY	NH5LLB
Color	3 Hoses, Red, Yellow, Blue	1 Hose, Red	1 Hose, Yellow	1 Hose, Blue
Pressure Scale	psi	0-800 psi		
Length	ft	5		
Connector	in	1/4" - 1/4"		

1-YEAR WARRANTY

Find Quality Products Online at:

www.GlobalTestSupply.com

sales@GlobalTestSupply.com