

2.5" GENERAL PURPOSE LOW PRESSURE GAUGE

REOTEMP's Series PC25N2/S2 brass gauges are designed for use in low pressure applications with dry gasses that are compatible with copper alloy. Examples include: exhaust systems and blowers.



PC25N2



PC25S2



Custom Logo


FEATURES / BENEFITS

- Sensitive Diaphragm/Capsule Mechanism
- Black Steel or Stainless Steel Case
- Easy-Access Zero Reset on Dial
- Economical Design for Non-Severe Service




SPECIFICATIONS

Accuracy	3 - 2 - 3%, ASME Grade B
Ambient Limits	-40°F/140°F
Process Limits	-40°F/140°F
Process Limits with Diaphragm Seal	Cannot be mounted to a diaphragm seal.
Wetted Materials	Capsule: Copper Alloy Socket: Copper Alloy
Lens	Plastic (Standard on "N" case, optional on "S" case) Glass (Standard on "S" case, not available on "N" case)
Other Materials	Case: Black Painted Steel or 304SS Ring: Snap-In Plastic or 304SS Dial: White Aluminum, Black Letters Case-to-Socket: Screw Connection
Fillable	No
Restrictor Screw	No
Maximum Working Pressure	Stable = 100% Momentary = 110% of scale
Weight	PC25N = .25 lbs, PC25S = .4 lbs

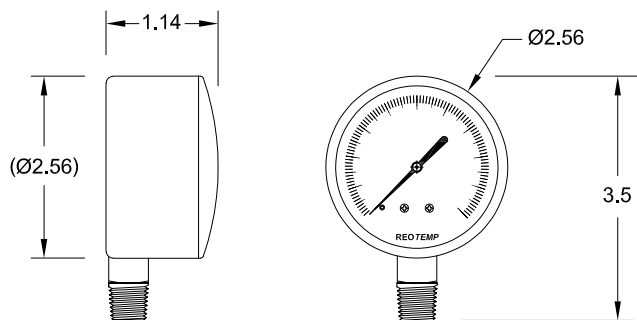

PC25N2

*dimensions in inches

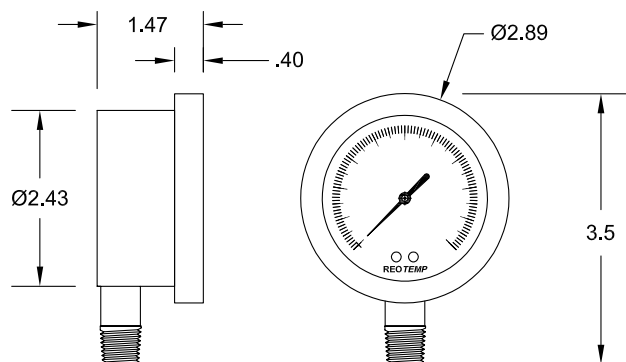

PC25S2

*dimensions in inches

2.5" GENERAL PURPOSE LOW PRESSURE GAUGE

HOW TO ORDER: Choose options to build a part number. For example: PC25N2A4P53-D-P-TS

PC25	N	2	A	4	P53	-D	-P	-TS
DIAL SIZE	CASE	CAPSULE & SOCKET	MOUNT TYPE	CONNECTION	RANGE CODE	CASE FILL	LENS	OPTIONS
PC25 = 2.5"	N = Black Steel with Snap-In Plastic Window, Zero Correction S = 304 SS Case & Bezel with Removable Bayonet, Zero Correction on Dial	2 = Copper Alloy	A =  Bottom *B =  Bottom/Rear Flange C =  Center Back *D =  Center Back "U" Clamp *E =  Center Back/ Front Flange	4 = 1/4" NPT	Common Ranges P51 = 0-15 in H ₂ O P52 = 0-30 in H ₂ O P53 = 0-60 in H ₂ O P54 = 0-100 in H ₂ O P55 = 0-160 in H ₂ O P56 = 0-200 in H ₂ O I55 = 0-5 psi Available Ranges ■ 15" to 300" Water Column ■ Gauge Pressure, Vacuum, or Compound Standard Units ■ in H ₂ O Available Units ■ kPa ■ inHg ■ mbar ■ mmHg ■ psi ■ oz/in ² ■ mmH ₂ O ■ & more For Additional Range Codes See Page 46	-D = Dry Case is not fillable.	-P = Plastic ¹ -G = Glass ²	-TS = Stainless Steel Tag -C3 = 3 pt. Calibration Certificate

*Non-standard configuration

¹Standard on "N" Case

²Standard for "S" Case but Not Available on "N" Case

Master Range Code Sheet

PRESSURE GAUGE RANGES AND CODES

SPECIAL RANGE TYPES

Receiver Ranges			Refrigerant Ranges			Tank Level Ranges	
Code	Element	Dial Range	Code	Dial Range	Refrigerant	Code	Range
P60	3-15 psi	0-100%	N06	-30inHg to 160 psi	Ammonia	F14	0-24ft H ₂ O
P61	3-15 psi	0-10 sq rt	R06	-30inHg to 160 psi	R134A	F15	0-30ft H ₂ O
P62	3-15 psi	0-100% & 0-10 sq.rt.	R06A	-30inHg to 160 psi	R22	F15C	0-40ft H ₂ O
			R06C	-30inHg to 160 psi	R404A	F16	0-60ft H ₂ O
			N07	-30inHg to 200 psi	Ammonia	F165	0-100ft H ₂ O
			N08	-30inHg to 300 psi	Ammonia		

PRESSURE GAUGES

LOW PRESSURE RANGES (PC SERIES ONLY)

Low Pressure Ranges													
inH ₂ O		oz/in ²		inH ₂ O & oz/in ²		mbar		psi					
Code	Range	Code	Range	Code	Range	Code	Range	Code	Range				
P50	0-10 inH ₂ O	Z50	0-6 oz/in ²	Q50Z	0-10 inH ₂ O & 0-6 oz/in ²	M51	0-40 mbar						
P51	0-15	Z51	0-8	Q49C	0-20 & 0-12								
P49	0-20	Z49	0-10										
P515	0-25	Z52E	0-15										
P52	0-30	Z52	0-20	Q52N	0-30 & 0-18	M521	0-70	I52	0-1 psi				
P525	0-40			Q525W	0-40 & 0-24	M525	0-100	I53	0-2				
P53	0-60			Z53	0-30	Q53	0-60 & 0-35			M53F	0-150		
P54	0-100			Z54	0-60	Q54B	0-100 & 0-60	M54	0-250	I54	0-3		
P55	0-160	Z56	0-100	Q56C	0-200 & 0-115	M55	0-400	I55	0-5				
P56	0-200					M56	0-500	I56	0-7				
Vacuum Ranges													
P88	-10-0 inH ₂ O	Z88	-6-0 oz/in ²	Q88	-10/0 inH ₂ O & -6/0 oz/in ²	M905	-100-0 mbar	I90	-1-0 psi				
P90	-30-0	Z90	-20-0	Q90	-30/0 & -18/0								
P91	-60-0	Z91	-30-0	Q91	-60/0 & -35/0					M94	-200-0	I91	-2-0
P92	-100-0	Z92	-60-0	Q92	-100/0 & -60/0					M95	-400-0		
Compound Ranges													
P7A	-5/0/5 inH ₂ O	Z7A	-3/0/3 oz/in ²	Q70C	-10/0/10 inH ₂ O & -6/0/6 oz/in ²	M71	-20/0/20 mbar	I73	-1-0-1 psi				
P70	-10/0/10					M72E	-30/0/30						
P71	-15/0/15					M72	-40/0/40						
P72	-20/0/20	Z72	-10/0/10	Q72C	-20/0/20 & -12/0/12	M735	-100/0/100						
P73	-30/0/30	Z745	-30/0/30	Q73C	-30/0/30 & -18/0/18		I74	-2-0-2					
P74	-60/0/60			Q75B	-100/0/100 & -60/0/60			I55U	-3/0/3				
P75	-100/0/100							P14C	-5/0/5				

DIFFERENTIAL PRESSURE RANGES (DP GAUGES ONLY)

psid		inH ₂ O		bard		mbard		kPad	
Code	Range	Code	Range	Code	Range	Code	Range	Code	Range
PD1	0-1 psid	ID10	0-10 inH ₂ O	BD1	0-1 bard	MD40	0-40 mbard	AD2.5	0-2.5 kPad
PD3	0-3	ID20	0-20	BD1.6	0-1.6	MD60	0-60	AD6	0-6
PD5	0-5	ID30	0-30	BD2.5	0-2.5	MD100	0-100	AD10	0-10
PD10	0-10	ID50	0-50	BD4	0-4	MD160	0-160	AD25	0-25
PD20	0-20	ID100	0-100	BD6	0-6	MD250	0-250	AD40	0-40
PD50	0-50	ID150	0-150	BD7	0-7	MD400	0-400	AD100	0-100
PD100	0-100	ID200	0-200	BD11	0-11	MD600	0-600	AD250	0-250
PD200	0-200	ID400	0-400	BD55	0-55	MD1000	0-1000	AD700	0-700
PD6000	0-6000			BD400	0-400				

PRESSURE GAUGE OPTIONS

		Heavy-Duty Industrial Gauges				Process Gauges			Stainless Steel Case Industrial Gauges			Commercial Gauges		Low Pressure Capsule Gauges			Test Gauges
Part #	Description	PR25	PR35	PR40	PR60	PT45P	PT45T	PI45	PM	PG**C	PG**S	PD15/20/25	PD35/40	PC25N	PC25S	PC40/45/60	PL60/45
CASE FILL OPTIONS																	
-G	Glycerin Filled Case	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A
-W	Glycerin Water Filled Case (65/35)	✓	✓	✓	✓	✓	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A
-S	Silicone Filled Case	✓	✓	✓	✓	✓	✓	N/A	✓	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-T	Teflon-coated Movement (No case fill)	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	✓
-I	Inert Case Fill	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
LENS OPTIONS																	
-P	Plastic Lens	STD	✓	✓	✓	✓	✓	STD	STD	STD	✓	✓	MQ	✓	✓	✓	✓
-T	Tempered Safety Glass Lens	✓	STD	STD	STD	STD	STD	N/A	N/A	N/A	STD	N/A	N/A	N/A	STD	STD	STD
-S	Laminated Safety Glass Lens	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	✓	N/A	N/A	N/A	✓	✓	✓
-G	Plain Glass	N/A	N/A	N/A	N/A	N/A	N/A	N/A	MQ	MQ	N/A	MQ	STD	N/A	N/A	N/A	N/A
POINTER OPTIONS																	
-RP	Red Pointer	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	N/A	✓	✓	✓
-MP	Min/Max Pointer (Drag Hand)†	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-MQ	Min/Max Pointer (Tamper-proof)†	✓	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-RH	Red Set Hand (Manual Adjustment)	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
-EC	Electrical Contacts	N/A	N/A	✓	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
DIAL OPTIONS																	
-CL	Custom Logo Dial	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	MQ	✓	✓	✓
-HV	Hi-Vis Dial	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	N/A	✓	✓	N/A
-CB	Color Band	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	MQ	✓	✓	N/A
-CP	Color Pie	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	MQ	✓	✓	N/A
-DM	Dial Marking	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	✓	✓	✓	✓
-LP	Removable Lens Protector	N/A	N/A	N/A	N/A	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
CALIBRATION OPTIONS																	
-R1	Upgrade to 1% FS Accuracy	✓	✓	STD	STD	N/A	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A
-R2	Upgrade to 0.5% FS Accuracy	N/A	N/A	✓	✓	STD	STD	STD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
-R5	Upgrade to 1.5% FS Accuracy	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	N/A
-C1	1pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
-C3	3pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
-C5	5pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
-CX	10pt. NIST Calibration Cert	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	STD
-CS	Calibration Sticker (No logged pts.)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	N/A
TAG OPTION																	
-TS	Stainless Steel Tag (1-10 Characters)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-TM	Stainless Steel Tag (11-80 characters)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-TP	Paper Tag	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CERTIFICATION OPTIONS																	
-CM	General Material Conformance	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-NC	Certificate of NACE Compliance	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	✓	✓	✓
-PM	Positive Material Identification Certificate (PMI)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-HT	Hydrostatic Test per ASME B31.3 (5 min)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
-LC	Argon Leak Check Certificate	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CLEANING OPTIONS																	
-DG	Degreased - Wiped Clean of Oils, Shipped in Sealed Bag	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	✓	✓	✓	✓
-OX	Cleaned for Oxygen Service per ASME B40.1	✓	✓	✓	✓	✓	✓	✓	MQ	MQ	✓	MQ	MQ	✓	✓	✓	✓
-OY	Cleaned for Oxygen Service per MIL-STD-1330D	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	✓	N/A	N/A	✓	✓	✓	✓
OTHER OPTIONS																	
-NR	No Restrictor Screw	✓	✓	✓	✓	✓	✓	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	✓	N/A
-FI	Dry Gauge Shipped with Fill Plug Installed	N/A	N/A	N/A	N/A	✓	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

✓ Indicates that the option is available with the model.

STD Indicates standard options with no additional cost.

N/A Indicates the option is not available with this model.

MQ Minimum order quantity applies.

†This option is only available with a plastic lens.