


PosiTector® **SPG** Probe Order Guide

Probes		SPG	SPG S	SPG OS	SPG CS	SPG TS
						
		Integral Probe	Cabled Probe			
Order Code		PRBSPG	PRBSPGS	PRBSPGOS	PRBSPGCS	PRBSPGTS
Application		Blasted Steel		Convex	Textured Coatings	Concrete Surface Profile
Measuring Range		0 – 500 µm 0 – 20 mils			0 – 1500 µm 0 – 60 mils	0 – 6 mm 0 – 250 mils
Accuracy		± (5 µm + 5%) ± (0.2 mil + 5%)				± (25 µm + 1%) ± (1 mil + 1%)
Tip	Angle	60 degree*			60 degree	
	Radius	50 µm (2 mils)			500 µm (20 mils)	


* 30 degree tips available for conforming to Australian standards AS 3994.5-C

Probe Dimensions

PosiTector SPG Probe

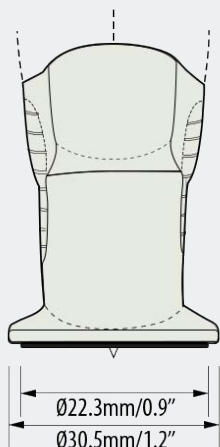

PosiTector SPGS,
SPGCS, SPGTS Probes

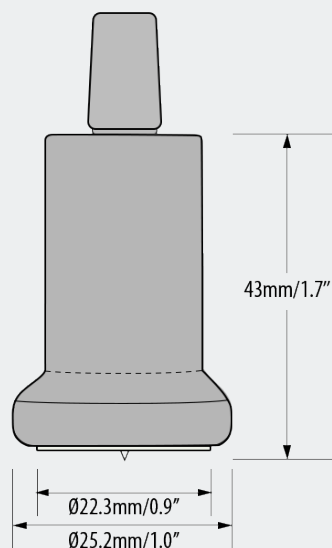

PosiTector SPGOS

