

MICRO-MACHINED SILICON TRANSDUCERS WET/WET DIFFERENTIAL PRESSURE MODELS



mV/V, 0 to 5 or 0 to 10 Vdc, or 4 to 20 mA Outputs
Uni-Directional Ranges
0-10 inH₂O to 0-1000 psid

PX409 Series



Standard

Fast Delivery!
Stock to 2 Weeks
On Most Models

Cable style.

High 0.08% Accuracy

- ✓ Precision Micro-Machined Silicon Core
- ✓ 5-Point NIST Traceable Calibration
- ✓ High Stability, Low Drift
- ✓ Welded Stainless Steel Construction
- ✓ 316L SS Wetted Parts
- ✓ Digital Dynamic Thermal Compensation Across Temperature and Pressure Range
- ✓ Premium Temperature Performance
- ✓ Broad Compensated Temperature Range
- ✓ Durable, 1 Million Cycle Life
- ✓ Ruggedized with Secondary Containment
- ✓ Customized Specifications Available

Get all the great performance characteristics of the Micro-Machined Silicon Transducers in these wet/wet differential pressure models. These rugged stainless steel transducers are ideal for tough industrial automotive, or aerospace applications requiring a wet/wet transducer. They can be used in test benches, filter monitoring, hydraulic, flow, or water/wastewater applications, as well as factory or pneumatic air, pitot tubes, air speed and other industrial or aerospace applications. The solid state silicon core and all stainless steel wetted parts will provide long, reliable service life with excellent long term stability. To obtain their high accuracy and stability, the PX409 Series use state of the art digital mapping of the temperature, pressure and output performance of the silicon sensor in conjunction with a custom ASIC to provide dynamic thermal compensation across the temperature and pressure parameters.

COMMON SPECIFICATIONS

Accuracy: 0.08% BSL linearity, hysteresis and repeatability combined

Minimum Resistance Between Transducer Body and Any Wire: 100 MΩ

Operating Temperature:

mV/V and 5 to 10 Vdc Output: -45 to 121°C (-49 to 250°F)

mA Output: -45 to 115°C (-49 to 239°F)

Compensated Temperature Range:

10 inH₂O to 5 psi: -17 to 85°C (1 to 185°F)

15 to 1000 psi: -29 to 85°C (-20 to 185°F)

Thermal Accuracy:

Zero Span

% Shift over compensated temperature range

10 inH₂O to 5 psi: ±1.00% ±1.00%

15 to 1000 psi: ±0.50% ±0.50%



PX409-015DWUV,
15 psid range,
10 mV/V output,
shown smaller
than actual size.

Metric threads
available,
visit us online

IP65 environmental rating.



PX459, M12 connector.

Five Electrical Termination Styles



PX409, 2 m (6') cable.



PX419, mini DIN.



PX409C, conduit cable.



PX429, twist-lock.

MICRO-MACHINED SILICON TRANSDUCERS WET/WET DIFFERENTIAL PRESSURE MODELS

Pressure Cycles: 1 million minimum

Long Term Stability (1-Year):

±0.1% FS typical

Bandwidth: DC to 1 kHz typical

Response Time: <1 ms

CE Compliant: Meets EN61326-1: 2006 for industrial locations

Shock: 50 g, 11 mS half sine, vertical and horizontal axis

Vibration: 5-2000-5 Hz, 30 minute cycle, Curve L, Mil-Spec 810 figure 514-2-2, vertical and horizontal axis

Wetted Parts: 316L stainless steel

Line/Static Pressure: 500 psi maximum applied to both sides simultaneously

Proof Pressure (Differential):

10 inH₂O range = 10 times range

1 psi range = 6 times range

2.5 to 750 psi ranges = 4 times range

1000 psi range = 3 times range

Hi Side Containment Pressure

(Differential):

Ranges 10 inH₂O to 5 psi: to 1000 psi

Ranges 15 to 1000 psi: to 3000 psi

Pressure Ports: ¼ NPT male

Electrical Terminations:

PX409: 2 m (6') cable

PX409C: 2 m (6') cable with ½ NPT conduit thread

PX419: mini DIN

(mating connector included)



PX429: Twist-lock,
(mating connector sold separately)

PX459: M12 connector

PX429 Mating Connector:

PT06F10-6S

Weight: 200 g (7 oz) maximum

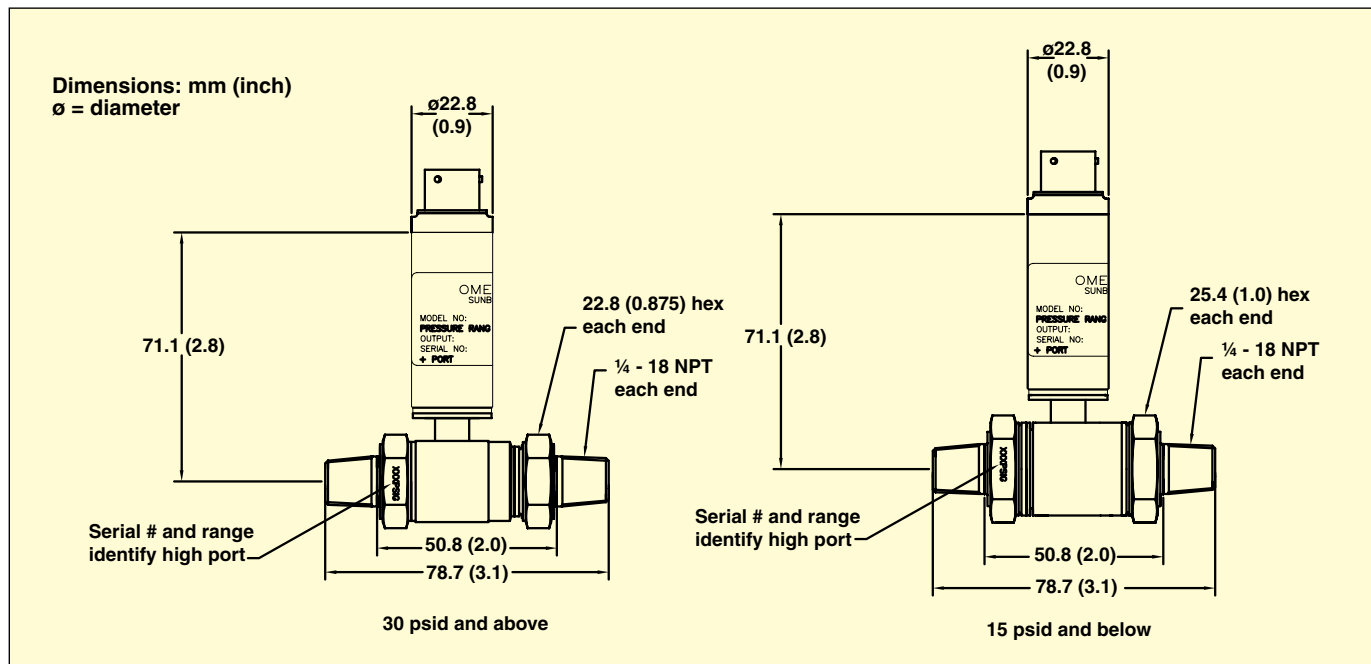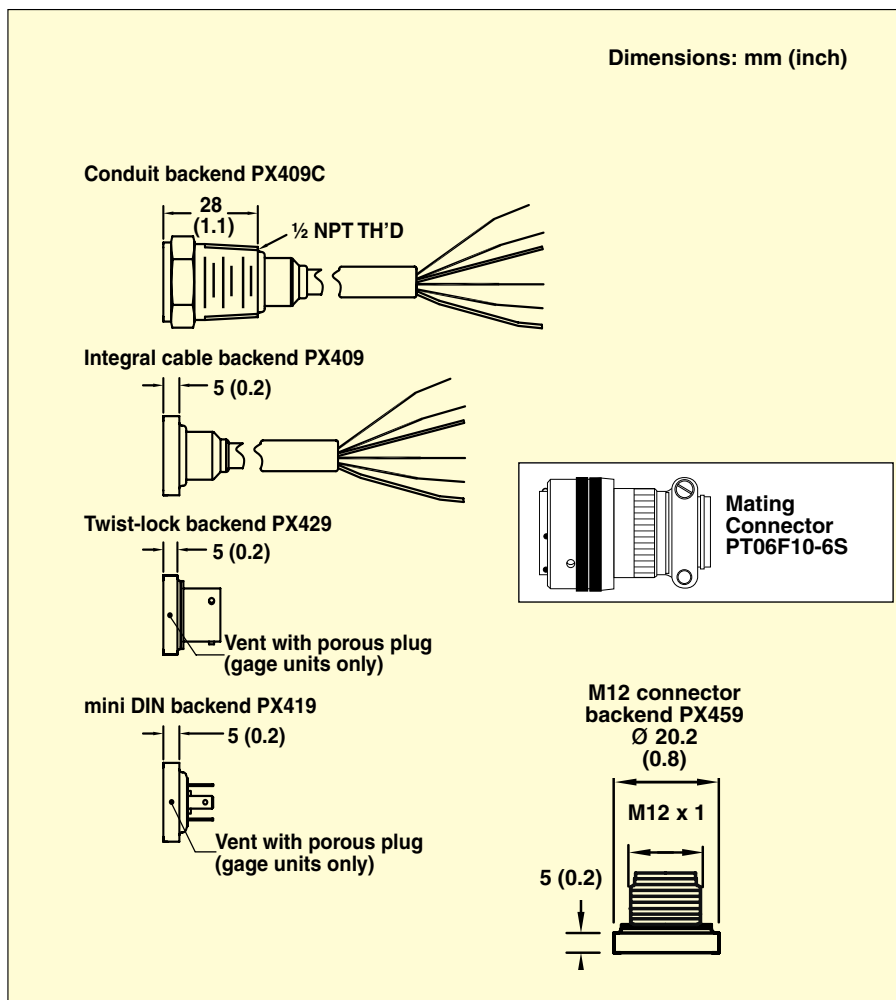

DIFFERENTIAL
PRESSURE TRANSDUCERS
B

WET/WET DIFFERENTIAL PRESSURE MODELS

UNI-DIRECTIONAL RANGES WITH mV/V OUTPUTS

UNI-DIRECTIONAL mV/V SPECIFICATIONS

Output: 10 mV/V ratiometric

Supply Voltage: 5 to 10 Vdc

Current Draw: 5 mA @ 10 Vdc

Input Impedance: 1000 to 5000 Ω

Output Impedance: 5000 Ω $\pm$ 10% typical

Zero Balance:

Ranges $\leq$ 2.5psi: $\pm$ 1% typical (2% maximum)


Ranges $>$ 2.5psi: $\pm$ 0.5% typical (1% maximum)

Span Setting:

Ranges $\leq$ 2.5psi: $\pm$ 1% typical (2% maximum)

Ranges $>$ 2.5psi: $\pm$ 0.5% typical (1% maximum)

Fast Delivery!
Stock to 2 Weeks
On Most Models

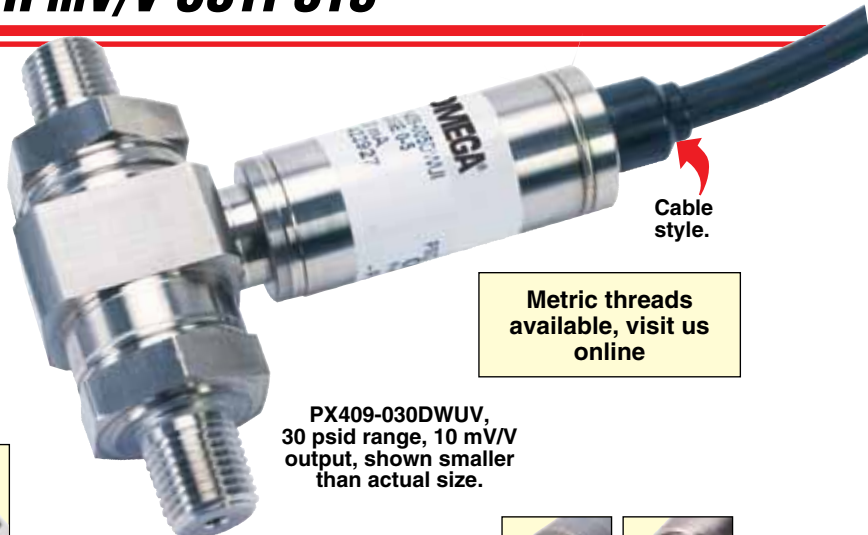

Metric threads
available, visit us
online

PX409-030DWUV,
30 psid range, 10 mV/V
output, shown smaller
than actual size.

CABLE TERMINATION*

To Order

10 mV/V OUTPUT, 1/4 NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX409-10WDWUV
0 to 1 psi	70 mbar	PX409-001DWUV
0 to 2.5 psi	170 mbar	PX409-2.5DWUV
0 to 5 psi	350 mbar	PX409-005DWUV
0 to 15 psi	1 bar	PX409-015DWUV
0 to 30 psi	2 bar	PX409-030DWUV
0 to 50 psi	3.5 bar	PX409-050DWUV
0 to 100 psi	7 bar	PX409-100DWUV
0 to 150 psi	10 bar	PX409-150DWUV
0 to 250 psi	17.5 bar	PX409-250DWUV
0 to 500 psi	35 bar	PX409-500DWUV
0 to 750 psi	50 bar	PX409-750DWUV
0 to 1000 psi	70 bar	PX409-1.0KDWUV


* To order conduit fitting backend change model number from "PX409" to "PX409C", no additional cost.



M12 or TWIST-LOCK TERMINATION

10 mV/V OUTPUT, 1/4 NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX4[*]9-10WDWUV
0 to 1 psi	70 mbar	PX4[*]9-001DWUV
0 to 2.5 psi	170 mbar	PX4[*]9-2.5DWUV
0 to 5 psi	350 mbar	PX4[*]9-005DWUV
0 to 15 psi	1 bar	PX4[*]9-015DWUV
0 to 30 psi	2 bar	PX4[*]9-030DWUV
0 to 50 psi	3.5 bar	PX4[*]9-050DWUV
0 to 100 psi	7 bar	PX4[*]9-100DWUV
0 to 150 psi	10 bar	PX4[*]9-150DWUV
0 to 250 psi	17.5 bar	PX4[*]9-250DWUV
0 to 500 psi	35 bar	PX4[*]9-500DWUV
0 to 750 psi	50 bar	PX4[*]9-750DWUV
0 to 1000 psi	70 bar	PX4[*]9-1.0KDWUV



Comes complete with 5-point NIST traceable calibration certificate.
[*] Enter "5" for PX459 M12 connector or "2" for PX429 twist lock connector (mating PX429 connector sold separately).

Ordering Examples: PX409-100DWUV, 0 to 100 psi uni-directional wet/wet differential pressure range, 10 mV/V output, 0.08% accuracy, 1/4 NPT fittings, 2 m (6') cable.

PX419-015DWUV, 0 to 15 psi uni-directional wet/wet differential pressure range, 10 mV/V output, 0.08% accuracy, 1/4 NPT fittings, mini DIN connector.

PX429-10WDWUV, 0 to 10 inH₂O uni-directional wet/wet differential pressure range, 10 mV/V output, 0.08% accuracy, 1/4 NPT fittings, twist-lock connector plus PT06F10-6S, mating connector.

MINI DIN TERMINATION

10 mV/V OUTPUT, 1/4 NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX419-10WDWUV
0 to 1 psi	70 mbar	PX419-001DWUV
0 to 2.5 psi	170 mbar	PX419-2.5DWUV
0 to 5 psi	350 mbar	PX419-005DWUV
0 to 15 psi	1 bar	PX419-015DWUV
0 to 30 psi	2 bar	PX419-030DWUV
0 to 50 psi	3.5 bar	PX419-050DWUV
0 to 100 psi	7 bar	PX419-100DWUV
0 to 150 psi	10 bar	PX419-150DWUV
0 to 250 psi	17.5 bar	PX419-250DWUV
0 to 500 psi	35 bar	PX419-500DWUV
0 to 750 psi	50 bar	PX419-750DWUV
0 to 1000 psi	70 bar	PX419-1.0KDWUV



CONNECTIONS—mV/V OUTPUT

PX429 TWIST-LOCK	PX419/PX459	PX409 CABLE
Pin A +EXC	Pin 1 +EXC	Red +EXC
Pin B -EXC	Pin 2 -EXC	Black -EXC
Pin C +SIG	Pin 3 +SIG	White +SIG
Pin D -SIG	Pin 4 -SIG	Green -SIG
Pin E No Connection		
Pin F No Connection		

WET/WET DIFFERENTIAL PRESSURE MODELS

UNI-DIRECTIONAL RANGES WITH 0 to 5 Vdc OUTPUTS

UNI-DIRECTIONAL VOLTAGE OUTPUT SPECIFICATIONS

Output Voltage/Supply Voltage: 0 to 5 Vdc/
10 to 30 Vdc; 0 to 10 Vdc/15 to 30 Vdc
(change "5V" to "10V" in model number)

Current Draw: 10 mA maximum

Maximum Current Output: 2 mA (= 2500 Ω
minimum load resistance)

Output Impedance: 100 Ω

Zero Balance:

Ranges > 2.5psi: $\pm 0.5\%$ typical (1% maximum)

Ranges $\leq 2.5\text{psi}$: $\pm 1\%$ typical (2% maximum)

Span Setting:

Ranges > 2.5psi: $\pm 0.5\%$ typical (1% maximum)

Ranges $\leq 2.5\text{psi}$: $\pm 1\%$ typical (2% maximum)

CABLE TERMINATION*

To Order

0 to 5 Vdc OUTPUT, 1/4 NPT MALE FITTINGS


RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX409-10WDWU5V
0 to 1 psi	70 mbar	PX409-001DWU5V
0 to 2.5 psi	170 mbar	PX409-2.5DWU5V
0 to 5 psi	350 mbar	PX409-005DWU5V
0 to 15 psi	1 bar	PX409-015DWU5V
0 to 30 psi	2 bar	PX409-030DWU5V
0 to 50 psi	3.5 bar	PX409-050DWU5V
0 to 100 psi	7 bar	PX409-100DWU5V
0 to 150 psi	10 bar	PX409-150DWU5V
0 to 250 psi	17.5 bar	PX409-250DWU5V
0 to 500 psi	35 bar	PX409-500DWU5V
0 to 750 psi	50 bar	PX409-750DWU5V
0 to 1000 psi	70 bar	PX409-1.0KDWU5V

* To order conduit fitting backend change model number
from "PX409" to "PX409C", no additional cost.

MINI-DIN TERMINATION

0 to 5 Vdc OUTPUT, 1/4 NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX419-10WDWU5V
0 to 1 psi	70 mbar	PX419-001DWU5V
0 to 2.5 psi	170 mbar	PX419-2.5DWU5V
0 to 5 psi	350 mbar	PX419-005DWU5V
0 to 15 psi	1 bar	PX419-015DWU5V
0 to 30 psi	2 bar	PX419-030DWU5V
0 to 50 psi	3.5 bar	PX419-050DWU5V
0 to 100 psi	7 bar	PX419-100DWU5V
0 to 150 psi	10 bar	PX419-150DWU5V
0 to 250 psi	17.5 bar	PX419-250DWU5V
0 to 500 psi	35 bar	PX419-500DWU5V
0 to 750 psi	50 bar	PX419-750DWU5V
0 to 1000 psi	70 bar	PX419-1.0KDWU5V

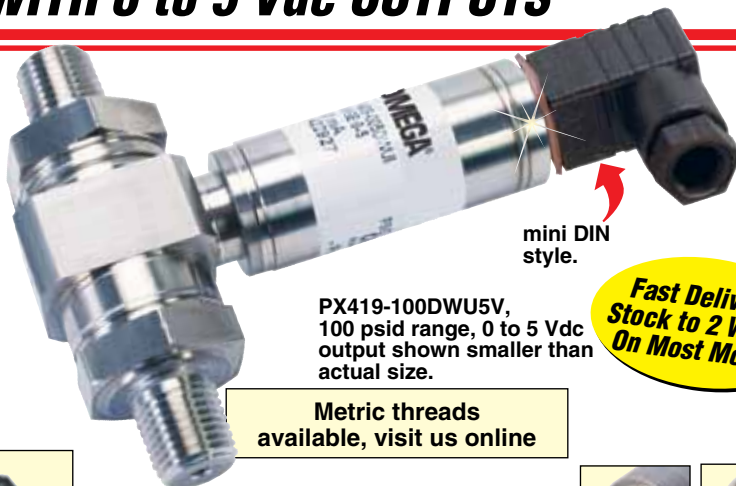

mini DIN
style.

PX419-100DWU5V,
100 psid range, 0 to 5 Vdc
output shown smaller than
actual size.

Metric threads
available, visit us online

Fast Delivery!
Stock to 2 Weeks
On Most Models

M12 or TWIST-LOCK TERMINATION

0 to 5 Vdc OUTPUT, 1/4 NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX4[*]9-10WDWU5V
0 to 1 psi	70 mbar	PX4[*]9-001DWU5V
0 to 2.5 psi	170 mbar	PX4[*]9-2.5DWU5V
0 to 5 psi	350 mbar	PX4[*]9-005DWU5V
0 to 15 psi	1 bar	PX4[*]9-015DWU5V
0 to 30 psi	2 bar	PX4[*]9-030DWU5V
0 to 50 psi	3.5 bar	PX4[*]9-050DWU5V
0 to 100 psi	7 bar	PX4[*]9-100DWU5V
0 to 150 psi	10 bar	PX4[*]9-150DWU5V
0 to 250 psi	17.5 bar	PX4[*]9-250DWU5V
0 to 500 psi	35 bar	PX4[*]9-500DWU5V
0 to 750 psi	50 bar	PX4[*]9-750DWU5V
0 to 1000 psi	70 bar	PX4[*]9-1.0KDWU5V

Comes complete with 5-point NIST traceable calibration certificate.

[*] Enter "5" for PX459 M12 connector or "2" for PX429 twist lock
connector (mating PX429 connector sold separately).

Note: To order 0 to 10 Vdc output, change "5V" to "10V" in model
number, no additional cost.

Ordering Examples: PX409-100DWU5V, 0 to 100 psi
uni-directional wet/wet differential pressure range, 0 to 5 Vdc output,
0.08% accuracy, 1/4 NPT fittings, 2 m (6') cable.

PX419-015DWU5V, 0 to 15 psi uni-directional wet/wet differential
pressure range, 0 to 5 Vdc output, 0.08% accuracy, 1/4 NPT fittings,
mini DIN connector.

PX429-10WDWU5V, 0 to 10 inH₂O uni-directional wet/wet
differential pressure range, 0 to 5 Vdc output, 0.08% accuracy,
1/4 NPT fittings, twist-lock connector plus PT06F10-6S,
mating connector.

CONNECTIONS—VOLTAGE OUTPUT

PX429 TWIST-LOCK		PX419/PX459		PX409 CABLE	
Pin A	+EXC	Pin 1	+EXC	Red	+EXC
Pin B	-COM	Pin 2	-COM	Black	-EXC
Pin C	+SIG	Pin 3	+SIG	White	+SIG
Pin D	No Conn	Pin 4	No Conn	Green	No Conn
Pin E No Connection					
Pin F No Connection					

DIFFERENTIAL
PRESSURE TRANSDUCERS
B

WET/WET DIFFERENTIAL PRESSURE MODELS UNI-DIRECTIONAL RANGES WITH 4 to 20 mA OUTPUTS

UNI-DIRECTIONAL mA SPECIFICATIONS

Output: 4 to 20 mA

Supply Voltage: 9 to 30 Vdc;
[9 to 20 Vdc above 105°C (229°F)]

Max Loop Resistance: (Vs-9) x 50 Ω

Zero Balance:

Ranges > 2.5psi: ±0.5% typical (1% maximum)

Ranges ≤ 2.5psi: ±1% typical (2% maximum)

Span Setting:

Ranges > 2.5psi: ±0.5% typical (1% maximum)

Ranges ≤ 2.5psi: ±1% typical (2% maximum)

Fast Delivery!
Stock to 2 Weeks
On Most Models



Twist-lock
style.

PX429-005DWUI, 5 psid
range, 4 to 20 mA output,
shown smaller than
actual size.

Metric threads
available, visit us online

CABLE TERMINATION*

To Order

4 to 20 mA OUTPUT, ¼ NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX409-10WDWUI
0 to 1 psi	70 mbar	PX409-001DWUI
0 to 2.5 psi	170 mbar	PX409-2.5DWUI
0 to 5 psi	350 mbar	PX409-005DWUI
0 to 15 psi	1 bar	PX409-015DWUI
0 to 30 psi	2 bar	PX409-030DWUI
0 to 50 psi	3.5 bar	PX409-050DWUI
0 to 100 psi	7 bar	PX409-100DWUI
0 to 150 psi	10 bar	PX409-150DWUI
0 to 250 psi	17.5 bar	PX409-250DWUI
0 to 500 psi	35 bar	PX409-500DWUI
0 to 750 psi	50 bar	PX409-750DWUI
0 to 1000 psi	70 bar	PX409-1.0KDWUI

* To order conduit fitting backend change model number
from "PX409" to "PX409C", no additional cost.

MINI DIN TERMINATION

4 to 20 mA OUTPUT, ¼ NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX419-10WDWUI
0 to 1 psi	70 mbar	PX419-001DWUI
0 to 2.5 psi	170 mbar	PX419-2.5DWUI
0 to 5 psi	350 mbar	PX419-005DWUI
0 to 15 psi	1 bar	PX419-015DWUI
0 to 30 psi	2 bar	PX419-030DWUI
0 to 50 psi	3.5 bar	PX419-050DWUI
0 to 100 psi	7 bar	PX419-100DWUI
0 to 150 psi	10 bar	PX419-150DWUI
0 to 250 psi	17.5 bar	PX419-250DWUI
0 to 500 psi	35 bar	PX419-500DWUI
0 to 750 psi	50 bar	PX419-750DWUI
0 to 1000 psi	70 bar	PX419-1.0KDWUI

M12 or TWIST-LOCK TERMINATION

4 to 20 mA OUTPUT, ¼ NPT MALE FITTINGS

RANGE	METRIC	MODEL NO.
0 to 10 inH ₂ O	25 mbar	PX4[*]9-10WDWUI
0 to 1 psi	70 mbar	PX4[*]9-001DWUI
0 to 2.5 psi	170 mbar	PX4[*]9-2.5DWUI
0 to 5 psi	350 mbar	PX4[*]9-005DWUI
0 to 15 psi	1 bar	PX4[*]9-015DWUI
0 to 30 psi	2 bar	PX4[*]9-030DWUI
0 to 50 psi	3.5 bar	PX4[*]9-050DWUI
0 to 100 psi	7 bar	PX4[*]9-100DWUI
0 to 150 psi	10 bar	PX4[*]9-150DWUI
0 to 250 psi	17.5 bar	PX4[*]9-250DWUI
0 to 500 psi	35 bar	PX4[*]9-500DWUI
0 to 750 psi	50 bar	PX4[*]9-750DWUI
0 to 1000 psi	70 bar	PX4[*]9-1.0KDWUI

Comes complete with 5-point NIST traceable calibration certificate.

[*] Enter "5" for PX459 M12 connector or "2" for PX429 twist lock
connector (mating PX429 connector sold separately).

Ordering Examples: PX409-100DWUI, 0 to 100 psi uni-directional
wet/wet differential pressure range, 4 to 20 mA output, 0.08%
accuracy, ¼ NPT fittings, 2 m (6') cable.

PX419-015DWUI, 0 to 15 psi uni-directional wet/wet differential
pressure range, 4 to 20 mA output, 0.08% accuracy, ¼ NPT fittings,
mini DIN connector.

PX429-10WDWUI, 0 to 10 inH₂O uni-directional wet/wet differential
pressure range, 4 to 20 mA output, 0.08% accuracy, ¼ NPT fittings,
twist-lock connector plus PT06F10-6S, mating connector.

CONNECTIONS—CURRENT OUTPUT

PX429 TWIST-LOCK	PX419/PX459	PX409 CABLE
Pin A +SUP	Pin 1 +SUP	Red +SUP
Pin B -SUP	Pin 2 -SUP	Black -SUP
Pin C No Conn	Pin 3 No Conn	White No Conn
Pin D No Conn	Pin 4 No Conn	Green No Conn
Pin E No Connection		
Pin F No Connection		