

## P/N: T199616

### Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

### Document identity

Publ. No.: T199616


Release:

Commit: 42503

Language: en-US

Modified: 2017-05-08

Formatted: 2017-05-09

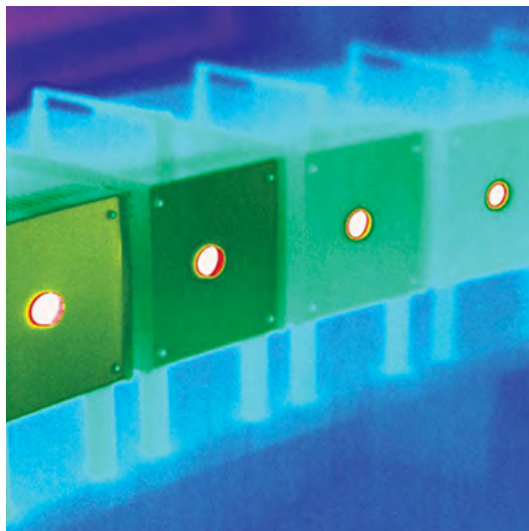

### General description

For high temperature applications the camera can be calibrated for high temperature ranges.

### Measurement

Temperature range	+300 to +1200°C (+572 to +2192°F)
-------------------	-----------------------------------

### Compatible with the following products

- 79302-0101; FLIR T530 24°
- 79306-0101; FLIR T530 24° + 14° & 42°
- 79305-0101; FLIR T530 24° + 42°
- 79304-0101; FLIR T530 24° + 14°
- 79303-0101; FLIR T530 42°
- 79307-0101; FLIR T530 42° + 14°