

T4

Now with
improved detection
of pentane and
long chain
hydrocarbons

Portable Multigas Detector



- Carbon monoxide
- Hydrogen sulphide
- Oxygen
- Flammable gases



T4

Portable Multigas Detector

When lives and property are at risk and you need gas detection equipment that is totally reliable, you need Crowcon. For over 45 years Crowcon has been developing and manufacturing high quality products with a reputation for reliability and technical innovation.

Crowcon provide both single gas and multigas monitors for personal monitoring and portable safety applications, providing protection against a wide range of industrial gas hazards. Models vary, but it is Crowcon's philosophy that each should be properly suited to its task.

T4 offers you compliance, robustness and a low cost of ownership in a simple to use solution.



Choosing the portable gas detector for your needs

T4 integrates innovative safety features and an intuitive, rugged design to provide advanced protection for those working in harsh environments. This portable multigas detector, which is exceptionally easy to use and service, protects against the four most prevalent gas hazards: **carbon monoxide** (CO), **hydrogen sulfide** (H₂S), **flammable** gases and **oxygen** (O₂) depletion.

Now with
improved detection
of pentane and
long chain
hydrocarbons

T4 Portable Multigas Detector



T4 Portable
Multigas
Detector

NEW Portables Pro 2.0 Software Easy service and configuration



The Complete Solution

From the individual contractor to the site safety manager, Crowcon offers all the tools needed to manage and maintain a T4 fleet with ease, and stay compliant.

I-Test & I-Test Manager Bump test & calibration solutions



Comprehensive range of accessories and charging options



Confidence, however you look at it

T4 contains a wide range of features to make everyday use easier and safer:

TWA Resume function

Unique to T4, this innovative feature ensures toxic gas exposure is calculated accurately over an entire shift, even if T4 is switched off for a break or during travel to another site.

18 hour battery life

Safely work multiple or longer shifts between charges, covered by the 18 hour battery life.

Backlit display

Large, clear display with backlight and option to flip the screen 180° for easy viewing whilst worn.



Rugged design

With a thick anti-shock rubber casing and drop tested to 4 meters on concrete, T4 provides dependable operation under the most demanding use. Water & dust resistant to IP65 & IP67.

Positive Safety indicator

A simple 'traffic light' status indicator which, at a glance, provides visual assurance of operational and compliance status to both users and supervisors.

Green light - Working safely

Red light - Attention required



Intrinsically safe

Approved for ATEX Zone 1 and UL Class 1 Div 1 for operation in the widest range of environments.



Dedicated sensors


One sensor for every gas ensures effective, fast and reliable detection.

Multiple alarms

Audible 95dB alarm, bright red/blue LED's and vibrating alerts provide effective warning to gas hazards.

Easy operation

Large single button and intuitive menu system minimize training and allow easy operation while wearing gloves.

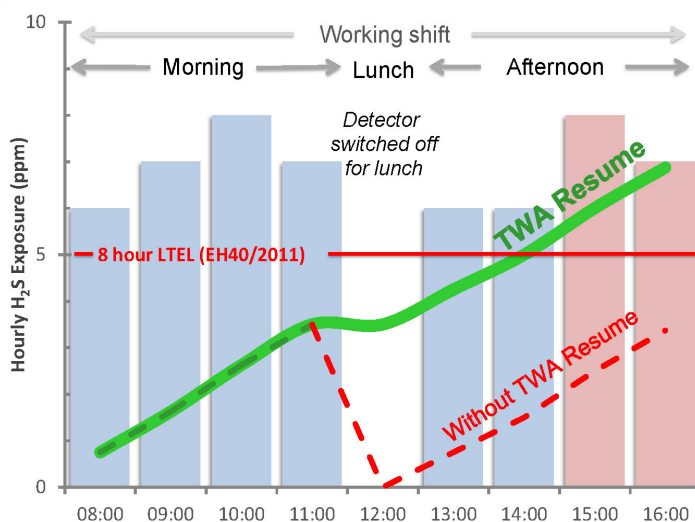

TWA Resume

TWA Resume* ensures time weighted average (TWA) toxic gas exposure is calculated accurately over an entire work shift.

The red line on the graph shows workers with other detectors risking overexposure to hydrogen sulphide (H₂S) by switching their detector off for a lunch break.

Only T4 provides the option to include previous measurements in the calculation when you switch your detector back on again and so prevent you exceeding your exposure limit. Because of TWA Resume (green line), T4 alarms at 14:00 when their 8 hour TWA reaches 5ppm.

* Patent pending - UK patent application number 1501699.1

Product Specification

Size		135 x 80 x 35mm (5.3 x 3.1 x 1.4in)
Weight		282g (9.9oz)
Durability		Drop tested 4m onto concrete
Alarms	Audible Vibrating Visible	95dB Integrated Bright red & blue LED's
Display		Front mounted, backlit, 180° flip for easy viewing while worn
Logging	Data Events	130 hours of data at 10s intervals 3,500
Battery	Rechargeable Li-ion	18 hour typical runtime; 5.5 hour recharge
Environment	Operating temp Humidity Ingress protection	-20 to +55°C (-4°F to +131°F)* 10-95% RH @ 40°C non-condensing Independently tested to IP65 and IP67
Compliance	EMC	Directive 2004/108/EC
Approvals	ATEX IECEx UL INMETRO	Ex II 2 G Ex d ia IIC T4 Gb Tamb -20°C to +55°C Ex d ia IIC T4 Gb Tamb -20°C to +55°C Use in hazardous locations Class 1 Div 1 groups A,B,C,D only as to intrinsic safety Ex d ia IIC T4 Gb Tamb -20°C to +55°C
Accessories	Included with T4	Integrated alligator clip and tethering loop Bump/calibration plate
	Available separately	Single unit cradle charger; 10 unit cradle charger; Vehicle charger Clip on dust filter plate I-Test automated bump test and calibration station

*Toxic and oxygen sensors are not rated for continuous operation above 50°C (122°F)

Product variants and options:

	2 gas - Flammable	2 gas	3 gas - H ₂ S	3 gas - CO	3 gas - CO (H ₂ immune)	4 gas	4 gas (H ₂ immune)
Oxygen (O₂)	●	●	●	●	●	●	●
Flammable	●		●	●	●	●	●
Hydrogen sulfide (H₂S)			●			●	●
Carbon monoxide (CO)		●		●		●	
Carbon monoxide (CO) - H₂ immune					●		●

Gases and Ranges:

Gas	Range	Resolution
Oxygen (O₂)	0-30% vol.	0.1% vol.
Flammable	0-100% LEL	1% LEL
Hydrogen sulfide (H₂S)	0-100ppm	1ppm
Carbon monoxide (CO)	0-1000ppm	1ppm

Crowcon reserves the right to change the design or specification of the product without notice.

Check www.crowcon.com for updates.

UK:

Tel: +44 (0) 1235 557700
Fax: +44 (0) 1235 557718
Email: sales@crowcon.com

US:

Tel: +1 859 957 1039
Toll Free: 800-527-6926
Fax: 859 - 957-1044
Email: salesusa@crowcon.com

NL:

Tel: +31 10 421 1232
Fax: +31 10 421 0542
Email: eu@crowcon.com

SG:

Tel: +65 6745 2936
Fax: +65 6745 0467
Email: sales@crowcon.com.sg

CN:

Tel: +86 (0) 10 6787 0335
Fax: +86 (0) 10 6787 4879
Email: saleschina@crowcon.com

IN:

Tel: +91 22 6708 0400
Fax: +91 22 6708 0405
Email: salesindia@crowcon.com

T4 Accessories:



Cradle charger

Docking station for easy charging



10 way charger

For charging and storing your T4 fleet



Vehicle charger

Effective charging and storage while travelling



NEW Portables Pro 2.0 Software

For easy configuration and servicing



External filter plate

Clip-on filter for dusty environments



Aspirator plate

Sample atmosphere prior to entry



I-Test

Easy automated bump testing and calibration solution



Bump/calibration plate

To apply test gas to T4