

# Truflo® — TKP Series In-Line Paddle Wheel Flow Meter Sensor

**ICON**™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment

Flow | Total | Pulse | RS485



**truflo**®

## Industry's **Longest Lasting** Paddle Wheel Flow Meter

Find Quality Products Online at:

[www.GlobalTestSupply.com](http://www.GlobalTestSupply.com)

[sales@GlobalTestSupply.com](mailto:sales@GlobalTestSupply.com)

# Truflo® — TKP Series

## In-Line Paddle Wheel Flow Meter Sensor

**ICON**™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment

- ✓ No Programming | Quick Installation
- ✓ Industry's Highest Accuracy:  $\pm 0.5\%$
- ✓ Lifetime Warranty\*



M12 Quick Connection

Flanged Connection

TK3P

316 Stainless Steel

Sanitary Connection



- ✓ Pulse | RS485 Outputs
- ✓ Flow | Total
- ✓ Revolutionary ShearPro® Paddle Wheel Design
- ✓ Low Pressure Drop
- ✓ NEMA 4X | IP 66 Protection
- ✓ Password Protected Security
- ✓ True Union Design ½" - 2"
- ✓ Flange Connection 3" - 4"

### Engineered for accuracy, ruggedness and longevity

The Truflo® TKP Series digital in-line flow meter sensors are easy to install with exceptional guaranteed long-life performance. They are highly repeatable, extremely rugged sensors that offer outstanding value and require no scheduled maintenance.

The TKP Series has a process-ready output signal with a wide dynamic flow range of 0.3 to 33 ft/s | 0.1 to 10 m/s. The sensor measures liquid flow rates in full pipes.

TKP Series flow meters are offered in a variety of materials and are available from ¼" - 4" pipe sizes. The many material choices, including PVC, PP, PVDF and 316 SS make this model highly adaptable and chemically resistant to many corrosive liquid process applications.

The TKP Series flow meter bodies (PVC, PP, PVDF) are true-union designed up to 2" just as any true-union ball valve is designed. 3" - 4" versions are flanged. They come completely pre-programmed with a bright LCD Display that rotates 360°.

\* The Truflo® TKP Series also comes equipped with a lifetime warranty on the paddle wheel assembly.



# Truflo® — TKP Series

## In-Line Paddle Wheel Flow Meter Sensor

### New ShearPro® Design

- ✓ Contoured Flow Profile
  - ✓ Reduced Turbulence = Increased Longevity
  - ✓ 78% Less Drag than Old Flat Paddle Design\*
- \*Ref: NASA "Shape Effects on Drag"



### Tefzel® Paddle Wheel


- ✓ Superior Chemical And Wear Resistance vs PVDF

### Zirconium Ceramic Rotor | Bushings

- ✓ Up to 15x the Wear Resistance vs. Regular Ceramic
- ✓ Integral Rotor Bushings Reduce Wear and Fatigue Stress


### ShearPro® Through-Pin Design

- ✓ Eliminates Finger Spread
- ✓ No Lost Paddles
- ✓ Increased Temp. Rating
- ✓ 360° Housing Protects Rotor

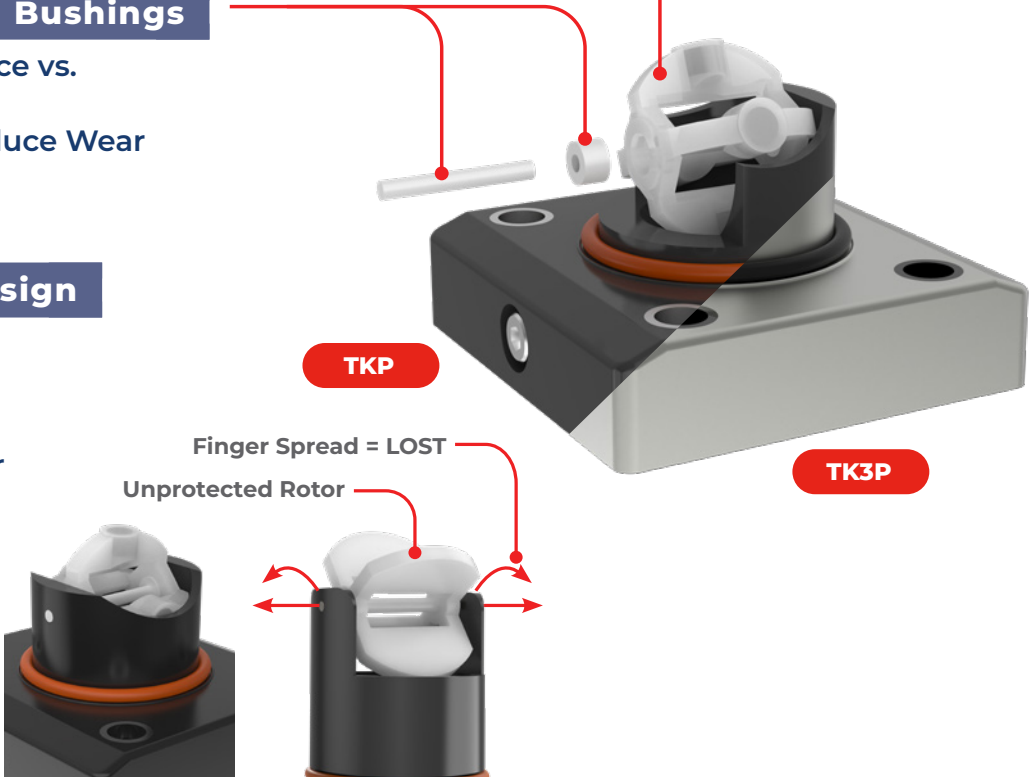

### Wiring Diagram

#### TKP - Flow Rate + Flow Totalizer + NPN Pulse Diagram

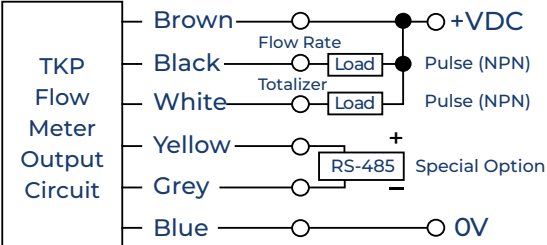

Brown	10 - 30 VDC (+)	Yellow	(+) RS-485 (OPT)
Blue	0V (-)	Grey	(-) RS-485 1 OPT RS485 is a Special Order Item
White	Totalizer Pulse Output NPN	Black	Flow Rate Pulse Output (NPN)

Yellow & Grey with RS485 (Only) Black Wire can be Changed for Flow Total Limit Output or Unit Volume Pulse Output

# Truflo® — TKP Series

## In-Line Paddle Wheel Flow Meter Sensor



### Specifications

General		
Operating Range	0.3 to 33 ft/s	0.1 to 10 m/s
Pipe Size Range	¼" to 4"	DN08 to DN100
Linearity	±0.5% of F.S @ 25°C   77°F	
Repeatability	±0.5% of F.S @ 25°C   77°F	
Wetted Materials		
Sensor Body	PVC (Dark)   PP (Pigmented)   PVDF (Natural)   316SS	
O-Rings	FKM   EPDM*   FFKM*	
Rotor Pin   Bushings	Zirconium Ceramic   ZrO <sub>2</sub>	
Paddle   Rotor	ETFE Tefzel®	
Electrical		
Frequency	49 Hz per m/s nominal	15 Hz per ft/s nominal
Supply Voltage	9 to 30 VDC ±10% regulated	
Supply Current	<1.5 mA @ 3.3 to 6 VDC	<20 mA @ 6 to 24 VDC
Max. Temperature/Pressure Rating - Standard and Integral Sensor   Non-Shock		
PVC	180 psi @ 68°F   40 psi @ 140°F	12.5 bar @ 20°C   2.7 bar @ 60°C
PP	180 psi @ 68°F   40 psi @ 190°F	12.5 bar @ 20°C   2.7 bar @ 88°C
PVDF	200 psi @ 68°F   40 psi @ 240°F	14 bar @ 20°C   2.7 bar @ 115°C
316 SS	Consult Factory	
Operating Temperature		
PVC	32°F to 140°F	0°C to 60°C
PP	-4°F to 190°F	-20°C to 88°C
PVDF	-40°F to 240°F	-40°C to 115°C
316 SS	-40°F to 300°F	-40°C to 149°C
Outputs		
TKP Series	NPN Pulse   RS485 Outputs	
Standards and Approvals		
CE   FCC   RoHS Compliant		

See Temperature and Pressure Graphs for more information

\*Optional

### K-Factors for TK Series

Size	LPM	GPM
¼"	547	2079
⅜"	300	1140
½"	127.6	484.9
¾"	81.8	310.8
1"	55.1	209.4
1½"	18.8	71.4
2"	10.2	38.8
3"	4.7	18
4"	2.1	8
⚠ K-Factor is Pre-Programmed		

### Min/Max Flow Rates

Pipe Size (O.D.)	LPM   GPM		LPM   GPM
	0.3m/s min.		10m/s max.
DN08 (¼")	0.04   0.16		12   3
DN10 (⅜")	1.0   3.8		50   13
DN15 (½")	3.5   1.0		120   32
DN20 (¾")	5.0   1.5		170   45
DN25 (1")	9.0   2.5		300   79
DN40 (1½")	25.0   6.5		850   225
DN50 (2")	40.0   10.5		1350   357
DN65 (2½")	60.0   16.0		1850   357
DN80 (3")	90.0   24.0		2800   739
DN100 (4")	125.0   33.0		4350   1149

◀ SS Only  
◀ SS Only


# Truflo® — TKP Series

## In-Line Paddle Wheel Flow Meter Sensor

### Temperature | Pressure Graphs | Non-Shock

**Note:** The Pressure/Temperature graphs are specifically for the Truflo® Flow Meter Sensors.

During system design the specifications of all components must be considered.

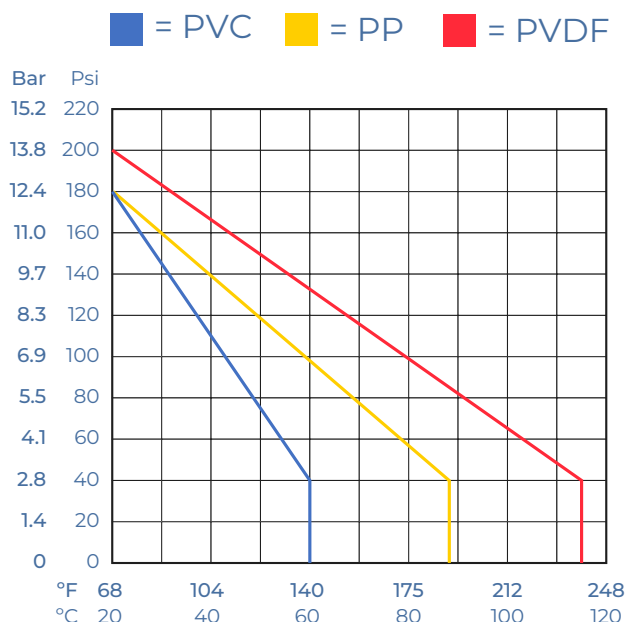

### Model Selection

TKP - 20 - P - T -  **NOTE:** Leave blank for standard options

Pipe Size	Material	End Connections	Seals
15 : ½"	P : PVC	Sch 80 Soc (Standard on PVC)	FKM (std)
20 : ¾"	PP: PP	T: NPT (Standard on PP/PVDF, available on PVC)	E: EPDM
25 : 1"	PF: PVDF	F: ANSI 150lb Flange	K: FFKM   Kalrez®
40 : 1½"		B: Butt Fusion	

TK3P- 20 - SS - SE -  **NOTE:** Leave blank for standard options

Pipe Size	Material	End Connections	Seals
08 : ¼"	S: SS	T : NPT (Standard)	FKM (std)
10 : ⅜"		SE: Sanitary	E: EPDM
15 : ½"			K: FFKM   Kalrez®
20 : ¾"			
25 : 1"			

*truflo*®

by

**ICON**™  
PROCESS CONTROLS

Corrosion-Free  
Instrumentation Equipment