

TPP SERIES

PTFE Teflon® Temperature Sensor

LevelPro®

- ✓ Teflon® Superior Corrosion Resistance
- ✓ Customizable Lengths | Ranges
- ✓ Phenomenal Accuracy | $\pm 0.5\%$ F.S



Outstanding Chemical Resistance
Thermowell Not Required


Features

- ✓ Large Temperature Range Capabilities
- ✓ Hirschmann DIN Connector
- ✓ Suitable for Sticky Liquids
- ✓ 2-Wire 4-20mA Loop Powered
- ✓ Local LED Display Option
- ✓ No Calibration Required


Specifications

Operating Voltage	9-30VDC
Current Consumption	3VA Max.
Output DC Current	150mA 30VDC Max.
Output Method	4-20mA Loop Powered
Connection Size	1/2" MNPT Connection
Operating Temp.	-22 - 392°F -30 - 200°C
Wetted Materials	PTFE Teflon® Sensor

Dimensions

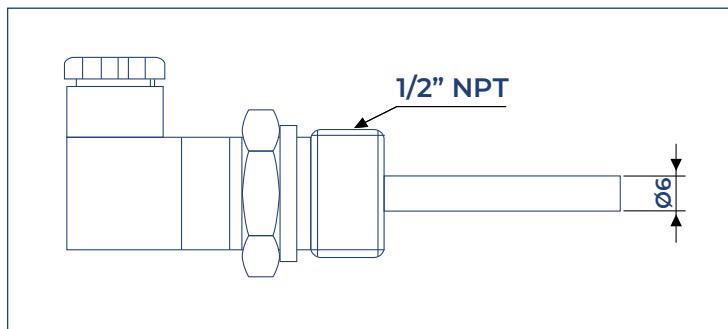


Wiring Schematic

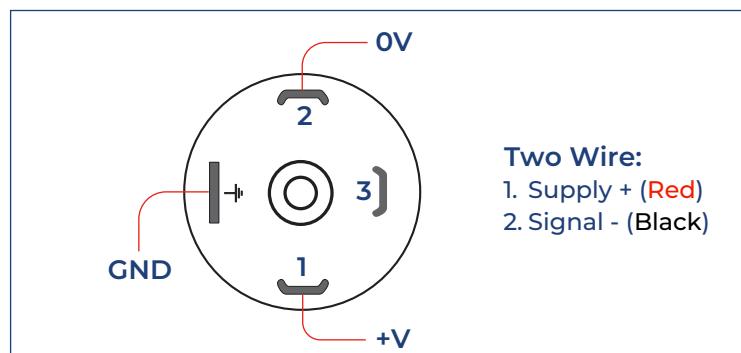

Two Wire:
1. Supply + (Red)
2. Signal - (Black)

Application Diagram

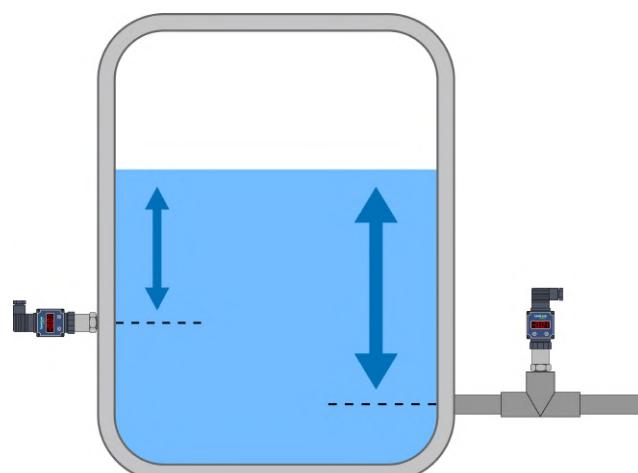

PTFE

RoHS Compliant