

# ProCon® —TUPA Series

## Analytical Sensor Installation Fittings


**ICON**™ Corrosion-Free  
PROCESS CONTROLS Instrumentation Equipment

### Features


- ✓ PVC | PP | PVDF Body
- ✓ True-Union Design
- ✓ Excellent Chemical Resistance

### Precision Fittings for Chemical Resistance

**TUPA Series** Installation fittings for analytical sensors provides reliable connections in harsh chemical environments. With high resistance to corrosive liquids & environments, this fitting ensures durability and leak-free performance in industry's most demanding analytical applications. Its unique union design allows for easy installation and maintenance.

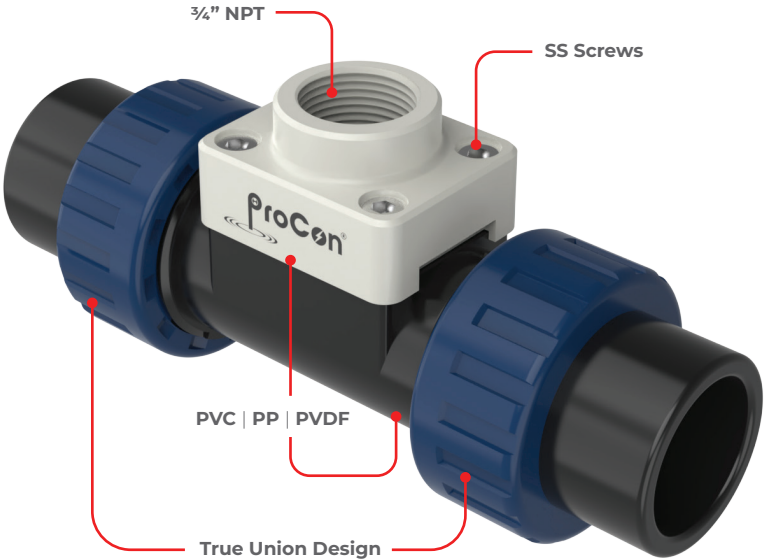

### Dimensions (in)

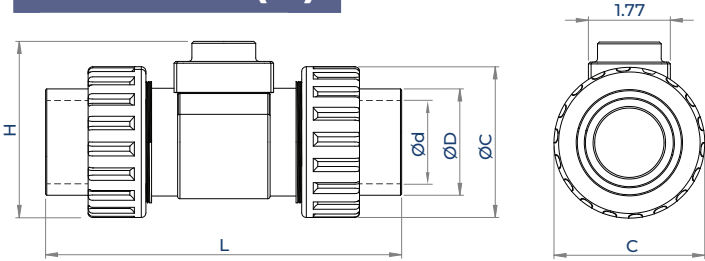

| Pipe Size   | L (inch) | d (inch) | D (inch) | C (inch) | H (inch) |
|-------------|----------|----------|----------|----------|----------|
| ½" DN (15)  | 5.48     | 0.84     | 1.07     | 1.61     | 2.73     |
| ¾" DN (20)  | 6.12     | 1.05     | 1.36     | 2.08     | 2.96     |
| 1" DN (25)  | 6.76     | 1.32     | 1.68     | 2.36     | 3.08     |
| 1½" DN (40) | 7.66     | 1.91     | 2.33     | 3.26     | 3.87     |
| 2" DN (50)  | 8.40     | 2.38     | 2.86     | 4.33     | 4.72     |

### Model Selection

TUPA - PV - 020 - T -   NOTE : Leave blank for standard options

| Material                      | Pipe Size                                            | End Connections                                                                        | Seals                |
|-------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------|
| PV: PVC<br>PP: PP<br>PF: PVDF | 005: ½"<br>007: ¾"<br>010: 1"<br>015: 1½"<br>020: 2" | S: Sch 80 Soc PVC (Std)<br>T: NPT*<br>F: ANSI 150lb Flange<br>B: Butt Fusion (PP/PVDF) | FKM (Std)<br>E: EPDM |

\* Standard on PP/PVDF, available on PVC



Extensive Lineup of the Industry's Most Innovative  
Analytical Sensors & Controllers

