
BINMASTER

Rotary Paddle Selection Guide


	Light Material	Medium Material	Heavy Material	Stainless Steel	Nylon	Insertable	Direct Connect	3-Vane	Single-Vane
GRP-1	X			X				X	
GRP-2		X		X				X	
GRP-3			X	X					X
GRP-11	X				X			X	
GRP-12		X			X			X	
GRP-22			X	X				X	
GRP-23		X		X		X			X
GRP-24			X						X
GRP-25	X			X				X	
GRP-26	X			X			X	X	
GRP-27		X		Х		X	Х		X
GRP-28	X			X				X	
GRP-29	X			Х			Х	X	
GRP-30		Х		Х			Х	X	
GRP-31			Х	Х					Х
GRP-34		Х	Х	Х		Х	Х		Х
GRP-35		Х	Х	Х		Х	Х		
GRP-36		Х	Х	Х		Х			Х
GRP-37		Х	Х	Х		Х			



BMRX and MAXIMA+ ROTARIES




- Stainless steel
- For light materials
- 3-vane paddle
- 7" diameter
- Must be used with a coupler

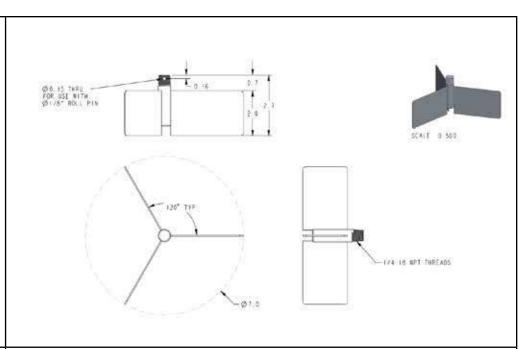




- · Stainless steel
- · For medium materials
- 3-vane paddle
- 5" diameter
- Must be used with a coupler

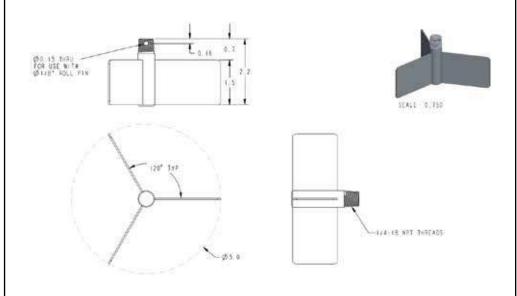




- Insertable through a 1-1/4"or 1-1/2" NPT opening
- · Stainless steel
- · For heavy materials
- · Single vane
- Turns in 5" diameter
- · Must be used with a coupler

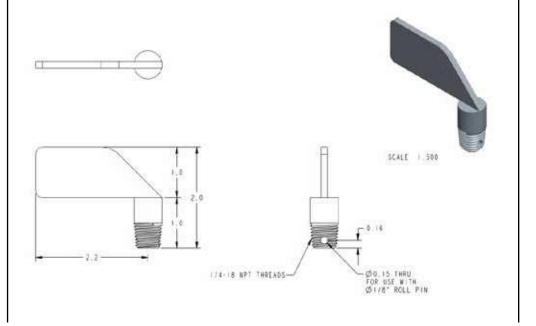

www.GlobalTestSupply.com




- · Economical, nylon paddle
- · For light materials
- 3-vane
- 7" diameter
- Must be used with a coupler

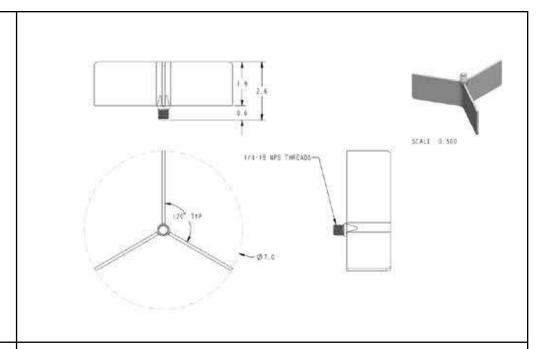




- Economical, nylon paddle
- · For medium materials
- 3-vane paddle
- 5" diameter
- · Must be used with a coupler

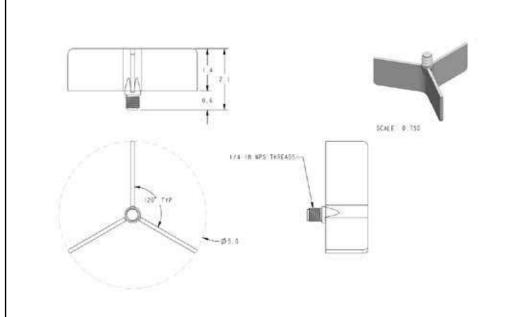





GRP-22

- · Stainless steel
- · For heavy materials
- 3-vane
- 5" diameter
- Must be used with a coupler

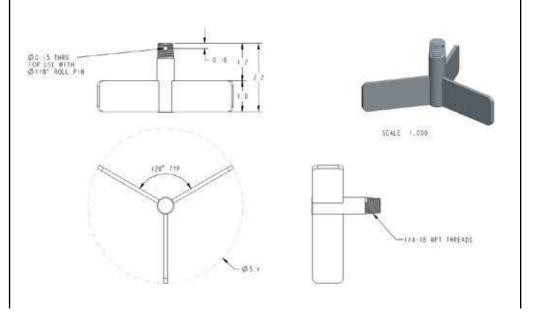




- · NPT opening
- Stainless steel
- · For medium materials
- · Single bayonet style
- Turns in 5" diameter
- Must be used with a coupler

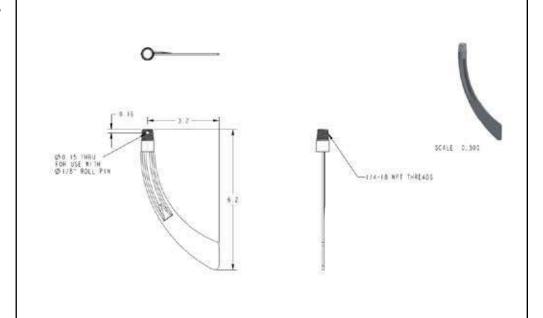



GRP-24


- 12" belt paddle
- · For use in heavy materials
- Used in large particulate size such as rock, coal or aggregate
- · Must be used with a coupler

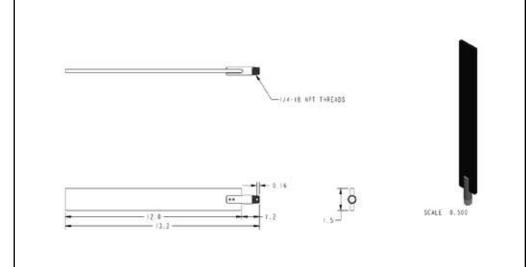





GRP-25

- · Stainless steel
- · For very light materials
- 3-vane
- Paddles are 5" tall and 1/16" thick to increase resistance in light materials
- · Must be used with a coupler

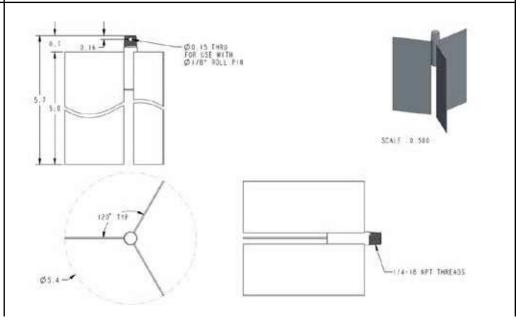




- Direct connect version of GRP-1
- · Does not require use of coupler
- Should be used when side mounting only
- · For light materials
- 3-vane, stainless steel
- 7" diameter, blades are 2' wide

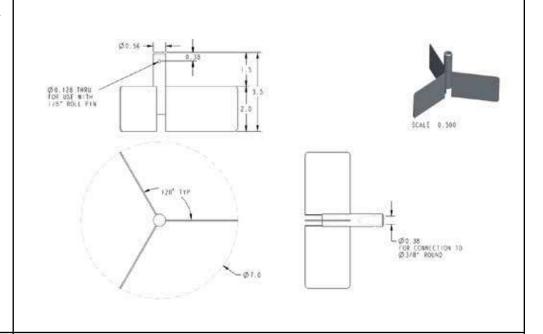





GRP-27

- Direct connect version of GRP-23
- · Does not require use of coupler
- Should be used when side mounting only
- · For medium materials
- Insertable, single bayonet style, stainless steel
- Blade is 1/8" thick and 1" wide

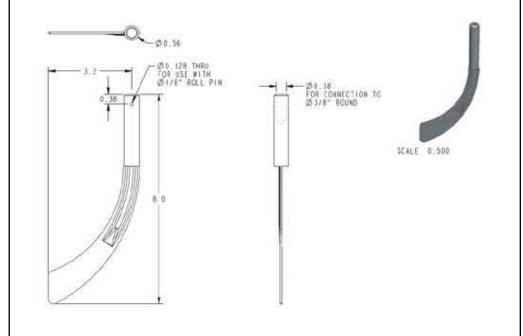




- · For extremely light materials
- · 3-vane, stainless steel
- 7" diameter for added resistance
- Blades are 5" tall and 1/16" thick to increase resistance in light materials

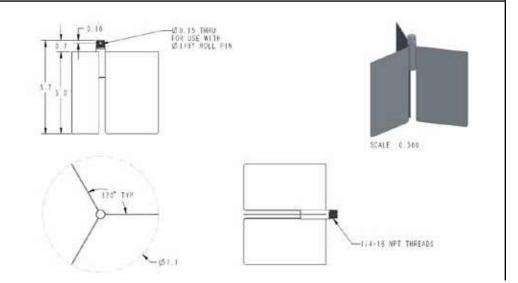




- Direct connect version of GRP-25
- Does not require use of coupler
- Should be used when side mounting only
- 3-vane, stainless steel paddle
- · For very light materials
- Paddles are 5" tall and 1/16" thick to increase resistance in light materials

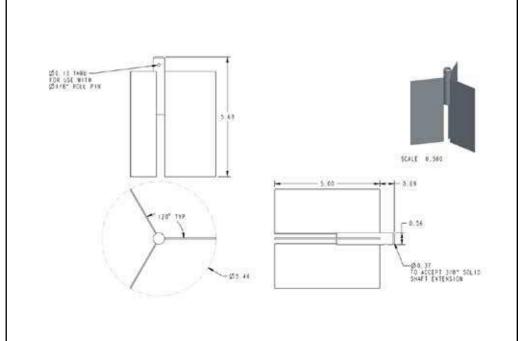




- Direct connect version of GRP-2
- Does not require use of coupler
- Should be used when side mounting only
- · For medium materials
- 3-vane paddle, stainless steel
- 5" diameter

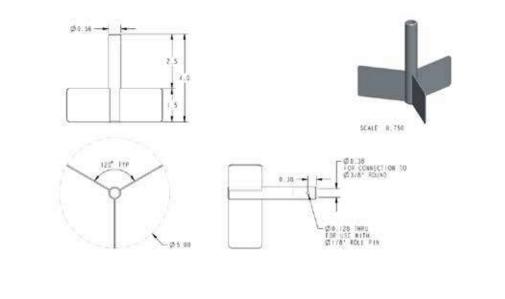






- · Single blade
- Stainless steel
- 3-1/4" long for heavy materials
- Turns in 6-1/2" diameter
- Blade is 1/8" thick and 1.63" wide
- Must be used with a coupler

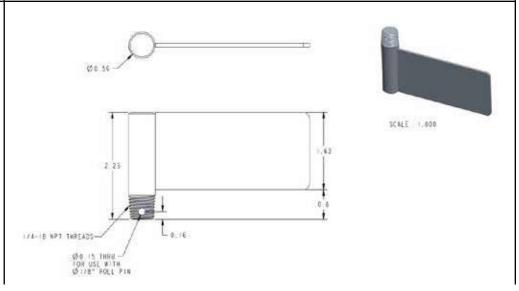

www.GlobalTestSupply.com




- Direct connect version of GRP-36
- · Single bladed, insertable paddle
- Folds to insert through a 1-1/4" or 1-1/2" NPT opening
- · Stainless steel
- Turns in 7-1/2" diameter
- Paddle blades are 1-1/2" wide

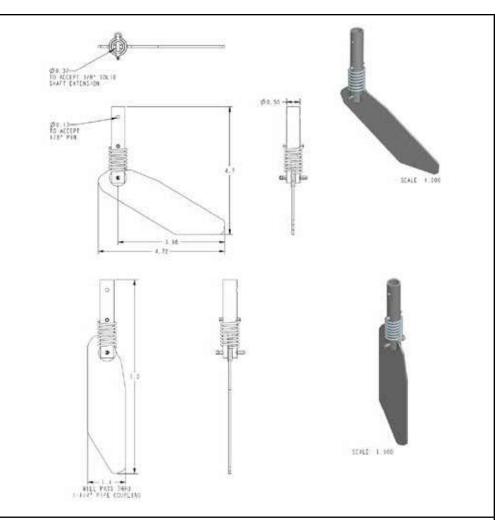




- Direct connect version of GRP-37
- · Double bladed, insertable paddle
- Folds to insert through a 1-1/4" or 1-1/2" NPT opening
- · Stainless steel
- Turns in 7-1/2" diameter
- Paddle blades are 1-1/2" wide

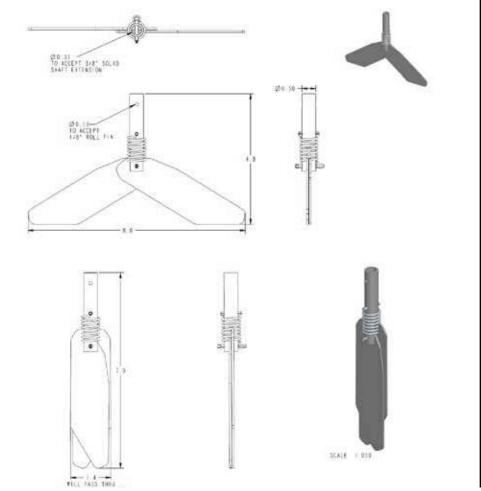



- · Single bladed, insertable paddle
- Folds to insert through a 1-1/4" or 1-1/2" NPT opening
- · Stainless steel
- Turns in 7-1/2" diameter
- Paddle blades are 1-1/2" wide
- · Must be used with a coupler

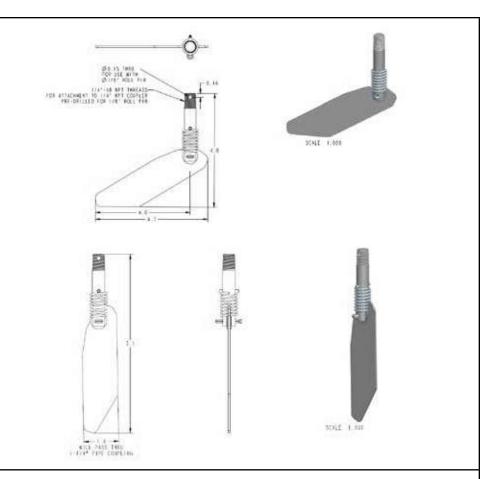



- Double bladed, insertable paddle
- Folds to insert through a 1-1/4" or 1-1/2" NPT opening
- · Stainless steel
- Turns in 7-1/2" diameter
- Paddle blades are 1-1/2" wide
- Must be used with a coupler

