




Made in the
United States of America



The Front Sole Grounder FSG1M provides improved floor contact by covering the ball of the foot with conductive rubber. Two D-Ring straps with hook and loop, and a back clasp provide a comfortable and secure fit.

| Properties | Typical Value | Test Method |
|----------------|--------------------------|---------------------------------------|
| Hook and Loop | 3/4" | |
| Elastic Strap | 3/4" Black with clasp | |
| D-Ring | 2 | |
| Resistor | 1 Megohm | |
| Sole Exterior | <10 ⁵ ohms | |
| Total Grounder | 9 x 10 ⁵ ohms | ANSI/ESD S20.20, EIA 625 ESD-SP9.2 |

| Item | Size |
|-------------------------|--------|
| FSG1M-S | Small |
| FSG1M-M | Medium |
| FSG1M-L | Large |

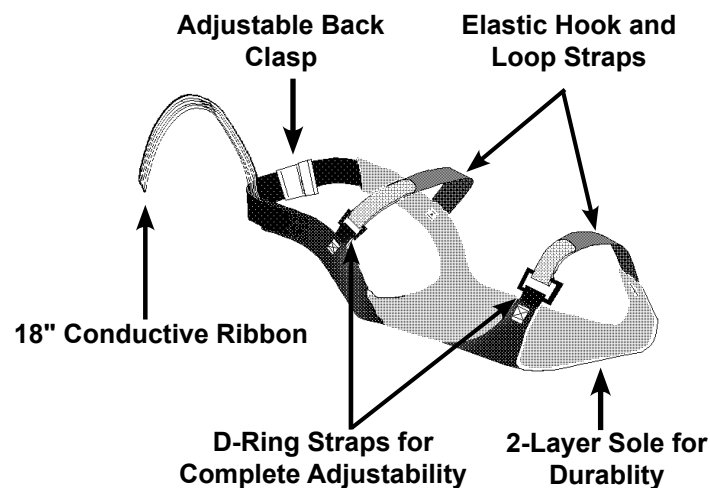

Note: This product is not recommended for use on equipment with operating voltage exceeding 250 VAC.

CAUTION: The ESD Series is for electrostatic control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the ESD Series.

Unless otherwise noted, tolerance $\pm 10\%$

FSG1M - FRONT SOLE GROUNDER, 1 MEG RESISTOR

SCS